

SHIELDED POWER INDUCTOR

ASPI-0703S



RoHS
Compliant



7.3 x 7.3 x 3.2mm

FEATURES:

- High saturation
- Magnetic shielding
- Very small footprint
- Flat-top for pick and place
- Low resistance to keep power loss minimum

APPLICATIONS:

- Palm-top and laptop
- LCD TV
- Power line DC to DC converters used in hard drive, notebook computer

STANDARD SPECIFICATIONS:

PARAMETERS

ABRACON P/N:	ASPI-0703S-xxx Series
Operating temperature :	-40°C to +85°C
Storage temperature :	25°C, Humidity < 75% RH

Test Conditions

Inductance: 1kHz

Isat: $\Delta L/L$ (initial) \geq -20%


Irms: $\Delta T \leq 40^\circ\text{C}$

PART NUMBER	INDUCTANCE (uH)	Tolerance	DCR (Ω) max	Isat (A) max	Irms (A) max
ASPI-0703S-2R2	2.2	M	0.032	5.00	3.20
ASPI-0703S-100	10	M	0.072	1.68	1.72
ASPI-0703S-120	12	M	0.098	1.52	1.56
ASPI-0703S-150	15	M	0.130	1.33	1.36
ASPI-0703S-180	18	M	0.140	1.20	1.23
ASPI-0703S-220	22	M	0.190	1.07	1.15
ASPI-0703S-270	27	M	0.210	0.96	1.03
ASPI-0703S-330	33	M	0.240	0.91	0.98
ASPI-0703S-390	39	M	0.320	0.77	0.83
ASPI-0703S-470	47	M	0.360	0.76	0.79
ASPI-0703S-560	56	M	0.470	0.68	0.71
ASPI-0703S-680	68	M	0.520	0.61	0.65
ASPI-0703S-820	82	M	0.690	0.57	0.61
ASPI-0703S-101	100	M	0.790	0.50	0.58
ASPI-0703S-121	120	M	0.890	0.49	0.57
ASPI-0703S-151	150	M	1.270	0.43	0.50
ASPI-0703S-181	180	M	1.450	0.39	0.45
ASPI-0703S-221	220	M	1.650	0.35	0.41
ASPI-0703S-271	270	M	2.310	0.32	0.37
ASPI-0703S-331	330	M	2.620	0.28	0.32
ASPI-0703S-391	390	M	2.940	0.26	0.30
ASPI-0703S-471	470	M	4.180	0.24	0.28
ASPI-0703S-561	560	M	4.670	0.22	0.26
ASPI-0703S-681	680	M	5.730	0.19	0.22
ASPI-0703S-821	820	M	6.540	0.18	0.18
ASPI-0703S-102	1000	M	9.440	0.16	0.16

OPTIONS AND PART IDENTIFICATION:

(Left blank if standard)

ASPI-0703S - -

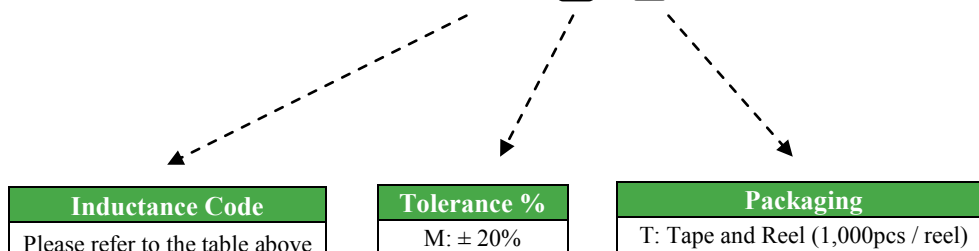

ABRACON IS
ISO 9001:2008
CERTIFIED



Visit www.abracon.com for Terms & Conditions of Sale

30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

Revised: 04.27.12

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Multilayer Ceramic Capacitors MLCC - SMD/SMT](#) category:

Click to view products by [ABRACON](#) manufacturer:

Other Similar products are found below :

[M39014/01-1467](#) [M39014/02-1218V](#) [M39014/02-1225V](#) [M39014/02-1262V](#) [M39014/02-1301](#) [M39014/22-0631](#) [1210J5000102JCT](#)
[1210J2K00102KXT](#) [1210J5000103KXT](#) [1210J5000223KXT](#) [D55342E07B379BR-TR](#) [D55342E07B523DR-T/R](#) [1812J1K00103KXT](#)
[1812J1K00473KXT](#) [1812J2K00680JCT](#) [1812J4K00102MXT](#) [1812J5000102JCT](#) [1812J5000103JCT](#) [1812J5000682JCT](#) [NIN-FB391JTRF](#)
[NIN-FC2R7JTRF](#) [NPIS27H102MTRF](#) [C1206C101J1GAC](#) [C1608C0G1E472JT000N](#) [C2012C0G2A472J](#) [2220J2K00101JCT](#)
[KHC201E225M76N0T00](#) [LRC-LRF1206LF-01R025FTR1K](#) [1812J1K00222JCT](#) [1812J2K00102KXT](#) [1812J2K00222KXT](#)
[1812J2K00472KXT](#) [2-1622820-7-CUT-TAPE](#) [2220J3K00102KXT](#) [2225J2500824KXT](#) [CCR07CG103KM](#) [CGA2B2C0G1H010C](#)
[CGA2B2C0G1H040C](#) [CGA2B2C0G1H050C](#) [CGA2B2C0G1H060D](#) [CGA2B2C0G1H070D](#) [CGA2B2C0G1H151J](#) [CGA2B2C0G1H1R5C](#)
[CGA2B2C0G1H2R2C](#) [CGA2B2C0G1H3R3C](#) [CGA2B2C0G1H680J](#) [CGA2B2C0G1H6R8D](#) [CGA2B2X8R1H221K](#) [CGA2B2X8R1H472K](#)
[CGA3E1X7R1C474K](#)