

HCMOS/TTL COMPATIBLE VOLTAGE CONTROL CRYSTAL OSCILLATOR



7.0 x 5.08 x 1.8mm

ASV/ASV1 SERIES

* RoHS COMPLIANT

FEATURES:

- Leadless chip carrier (LCC), Low profile.
- HCMOS/TTL Compatible, 3.3Vdc, 2.5Vdc, & 1.8Vdc operation.
- Seam welding, Reflow capable.
- Seam welding, 1.4 max. height (ASV1)


APPLICATIONS:

- Provide clock signals for microprocessors, PC mainboards, Graphic cards.
- High output drive capability applications.

STANDARD SPECIFICATIONS:

PARAMETERS	
Frequency Range:	1.000 MHz to 150 MHz
Operating Temperature:	-10° C to + 70° C (see options)
Storage Temperature:	- 55° C to + 125° C
Overall Frequency Stability:	± 100 ppm max. (see options)
Supply Voltage (Vdd):	3.3 Vdc ± 10% (see options)
Input Current:	See Table 1
Symmetry:	40/60 % max.@ 1/2Vdd (see options)
Rise And Fall Time (Tr/tf):	See Table 1
Output Load:	15 pF (5TTL)
Output Voltage:	VOH = 0.9 * Vdd min. VOL = 0.4 Vdc max.
Start-up Time:	10ms max.
Tristate Function :	"1" (VIH >= 2.2 Vdc) or open: Oscillation "0" (VIL < 0.8 Vdc) : Hi Z
Aging At 25°c/year :	± 5ppm max.
Period Jitter One Sigma :	± 25ps max.
Disable Current:	15µA max.

OUTLINE DRAWING:

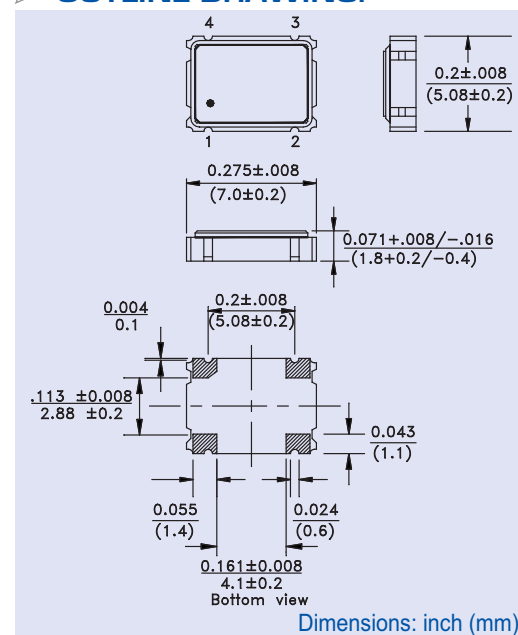

MARKING:

- XX.X RS (see note)
- ASV ZYW (see note)

Alternate Marking:

Marking scheme subject to change without notice.
Contact factory for Alternate Marking Specifications.

NOTE:

XX.X First 3 digits of freq.
ex: 66.6 or 100
R Freq. Stability option (*)
S Duty cycle option (*)
L Temperature option (*)
Z month A to L
Y year 6 for 2006
W traceability code (A to Z)

PIN	FUNCTION
1	Tri-state
2	GND/Case
3	Output
4	Vdd

Table 1

Freq. (MHz)	I _{dd} max. (mA)	Tr/Tf max. (nSec)
1.0 ~ 34.99	16	10ns
35.0 ~ 60.0	25	5ns
60.01~99.99	40	5ns
100 ~ 150	50	2.5ns

OPTIONS AND PART IDENTIFICATION (Left blank if standard):

ASV - Voltage - Frequency - Temp. - Overall Frequency Stability - Duty cycle - Packaging

Freq Stability options:

- Y for ± 10 ppm max.
- J for ± 20 ppm max.
- R for ± 25 ppm max.
- K for ± 30 ppm max.
- H for ± 35 ppm max.
- C for ± 50 ppm max.

Temperature options:

- I for 0°C to +50°C
- D for -10°C to +60°C
- E for -20°C to +70°C
- F for -30°C to +70°C
- N for -30°C to +85°C
- L for -40°C to +85°C

Voltage options:

- 25 for 2.5V
- 18 for 1.8V

Symmetry option:

- S for 45/55% at 1/2Vdd
- S1 for 45/55% at 1.4Vdc

Packaging option:

- T for Tape and Reel (1,000pcs/reel)
- T5 for Tape and Reel (500pcs/reel)

ABRACON IS
ISO 9001 / QS 9000
CERTIFIED

REV. 2.1-5.06



30332 Esperanza, Rancho Santa Margarita, California 92688
tel 949-546-8000 | fax 949-546-8001 | www.abracon.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [ABRACON](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-12](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#)
[SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.00000](#) [8208AC-82-18E-25.00000](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.00000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.00000](#) [9102AI-232H25S125.00000](#) [9102AI-133N25E200.00000](#) [9102AC-283N25E200.00000](#) [9001AC-33-33E1-30.000](#) [XLH536125.000JS4I](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [SIT1602BC-83-33E-10.000000Y](#) [8003AI-12-33S-40.00000Y](#)