

# VERTICALLY ASSEMBLED POWER INDUCTOR



AVR-1Z090509S

Request Samples



Check Inventory



9.0 x 5.2 x 9.4mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Features

- Ferrite Core
- Low DCR, High Efficiency
- High temperature current rating
- High saturation current rating

## Applications

- Single and Multiphase DC-DC converters
- Voltage regulator modules (VRMs)
- Renewable energy, Power inverters, DC links
- Electric Vehicles (EVs)
- Telecom infrastructure, datacenters, servers and switches
- Industrial and robotics equipment
- Medium and high-power switch mode power supplies (SMPS)

## Electrical Specifications @ 25°C

Part Number*	Inductance	Inductance Tolerance	Dim. B	DC Resistance	Saturation Current		Temperature Rise Current
	100KHz/1.0V		Max.		Typ.		Typ.
Units	nH	%	mm	mΩ	A		A
Symbol	L	L	B	DCR	Isat1@ 25°C	Isat2@ 100°C	Irms
AVR-1Z090509S90NLT	90	15%	5.2	0.125±10%	90	77	63
AVR-1Z090509SR10LT	100		5.2		80	70	
AVR-1Z090509SR12LT	120		5.0		72	64	
AVR-1Z090509SR15LT	150		5.0		58	51	
AVR-1Z090509SR18LT	180		5.0		49	42	
AVR-1Z090509SR21LT	210		5.0		38	33	
AVR-1Z090509SR24LT	240		5.0		33	30	
AVR-1Z090509SR27LT	270		5.0		30	26	
AVR-1Z090509SR33LT	330		5.0		23	19	

\* The "T" at the end of the part number refers to "Tape & Reel" packaging. For other options, please refer to the Part Identification section.

### Test Conditions:

**Isat1:** DC current at which the inductance drops 20% from its nominal value at 25°C.

**Isat2:** DC current at which the inductance drops 20% from its nominal value at 100°C.

**Irms:** DC current that causes the temperature rise ( $\Delta T$ , approximate 40 °C) from 25°C ambient.

**Dim. B:** Refer to the Mechanical Specs section

**Operating Temperature:** -40°C ~ +125°C. (including self-temperature rise)

**Storage Condition:** -40°C ~ +125°C (on board), -10°C ~ +40°C (with packaging) and R.H. 70 max.

AVR-1Z090509S Series is **RoHS Compliant and Pb free.**



5101 Hidden Creek Ln, Spicewood TX 78669  
Phone: 512-371-6159 Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
www.abracon.com

REVISION Initial Release :  
6/10/2024

ABRACON IS  
ISO9001-2015  
CERTIFIED

# VERTICALLY ASSEMBLED POWER INDUCTOR



**AVR-1Z090509S**

Request Samples






Check Inventory




**9.0 x 5.2 x 9.4mm**  
**RoHS/RoHS II Compliant**  
**MSL Level = 1**

## Performance Graphs

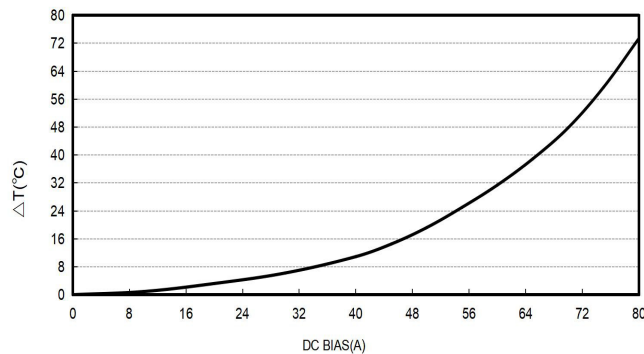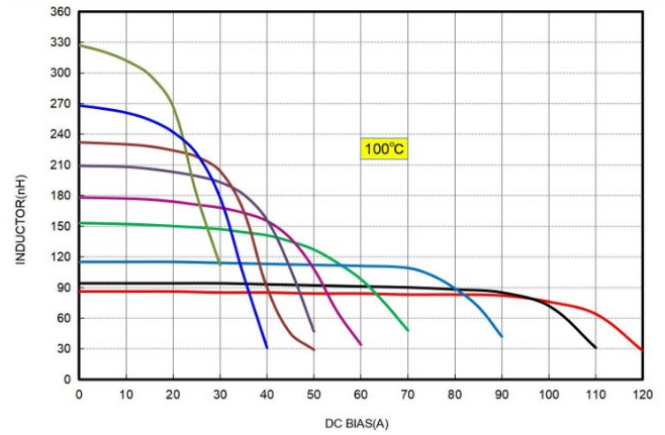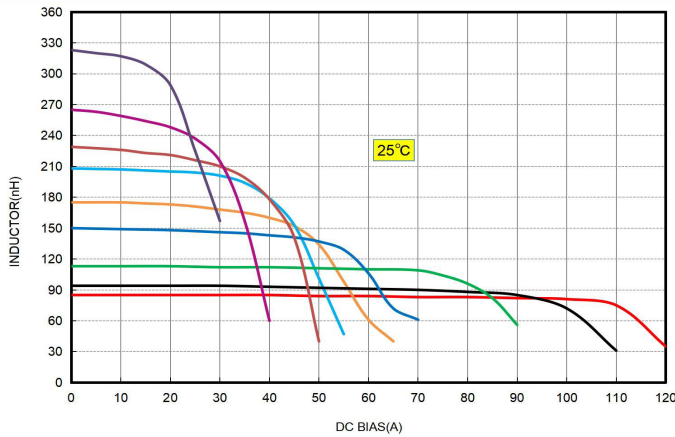

## Part Identification

AVR-1Z090509S

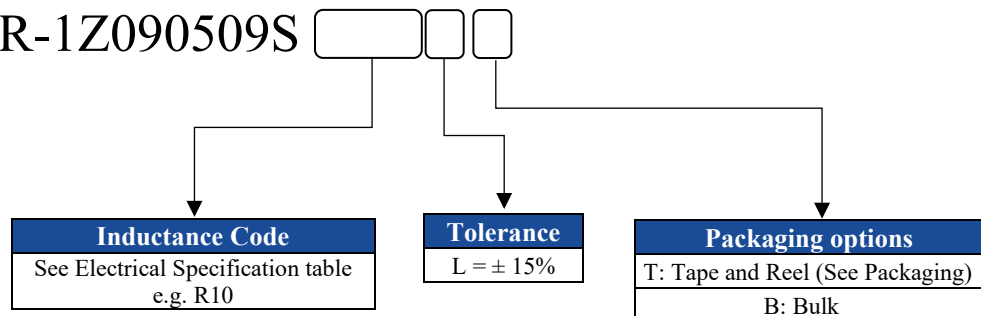

\*Tolerance only available as indicated in electrical spec. table



5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

**REVISION Initial Release :**  
**6/10/2024**

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

# VERTICALLY ASSEMBLED POWER INDUCTOR



AVR-1Z090509S

Request Samples






Check Inventory




9.0 x 5.2 x 9.4mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Mechanical Specifications

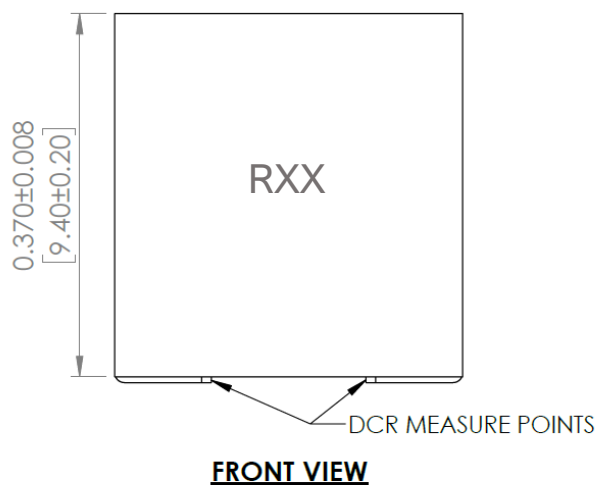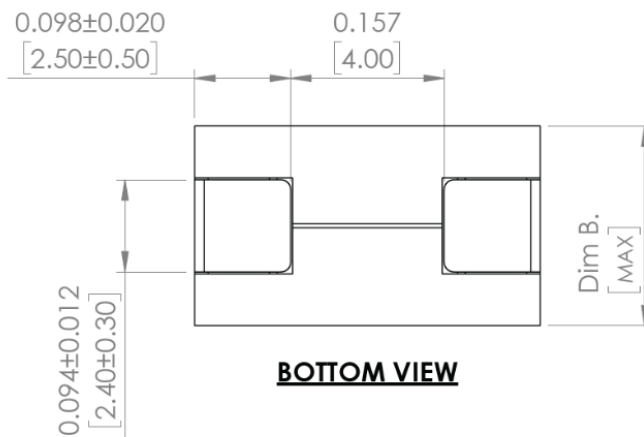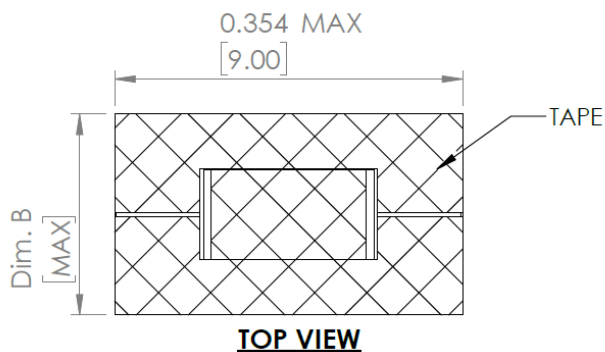

## RECOMMENDED LAND PATTERN

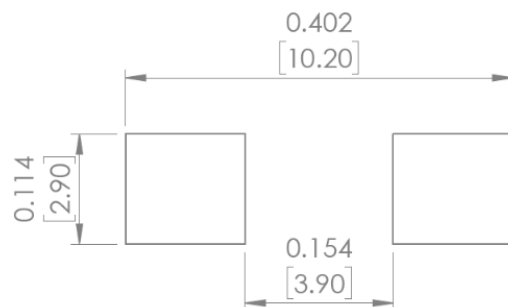

Refer to the Specification table for Dim B.

**Markings:** Inductance code.

**Dimensions:** Inches [mm]



5101 Hidden Creek Ln, Spicewood TX 78669  
Phone: 512-371-6159 Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION Initial Release :  
6/10/2024

ABRACON IS  
ISO9001-2015  
CERTIFIED

# VERTICALLY ASSEMBLED POWER INDUCTOR



AVR-1Z090509S

Request Samples




Check Inventory



9.0 x 5.2 x 9.4mm  
RoHS/RoHS II Compliant  
MSL Level = 1

## Reflow Profile

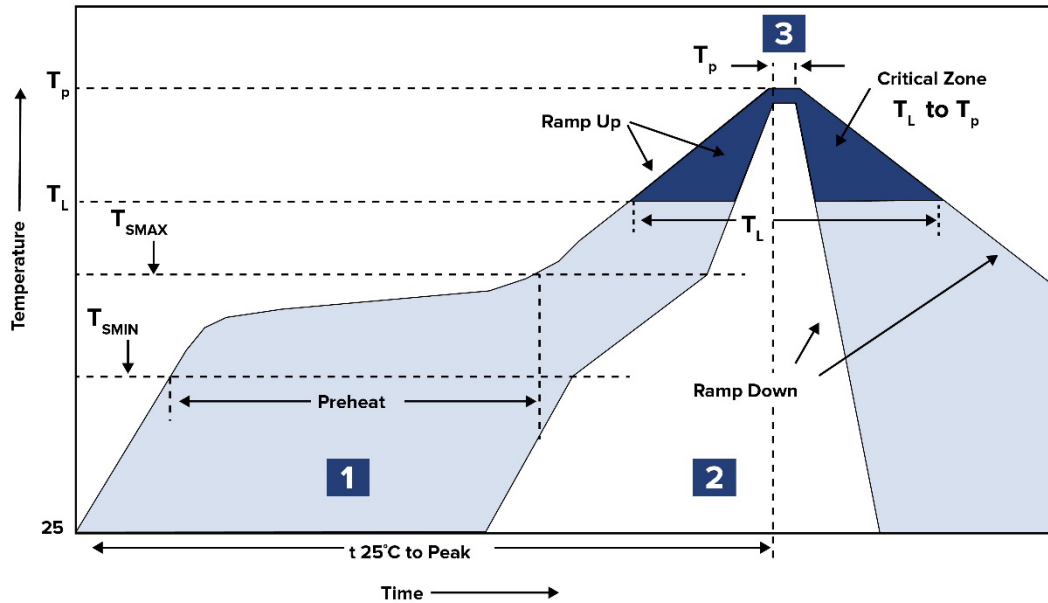

Zone	Description	Temperature	Times
1	Preheat	$T_{SMIN} \sim T_{SMAX}$ 150°C ~ 200°C	60 ~ 180 sec.
2	Reflow	$T_L$ 217°C	60 ~ 150 sec.
3	Peak heat	$T_P$ 250°C ± 5°C	5 ± 0.5 sec.

Ramp up rate: 3°C/s Max.

Ramp down rate: 6°C/s Max.



5101 Hidden Creek Ln, Spicewood TX 78669  
Phone: 512-371-6159 Fax: 512-351-8858  
For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

REVISION Initial Release :  
6/10/2024

ABRACON IS  
ISO9001-2015  
CERTIFIED

# VERTICALLY ASSEMBLED POWER INDUCTOR



AVR-1Z090509S

Request Samples




Check Inventory




9.0 x 5.2 x 9.4mm  
**RoHS/RoHS II Compliant**  
 MSL Level = 1

## Packaging

Tape & Reel: 400 pcs/reel

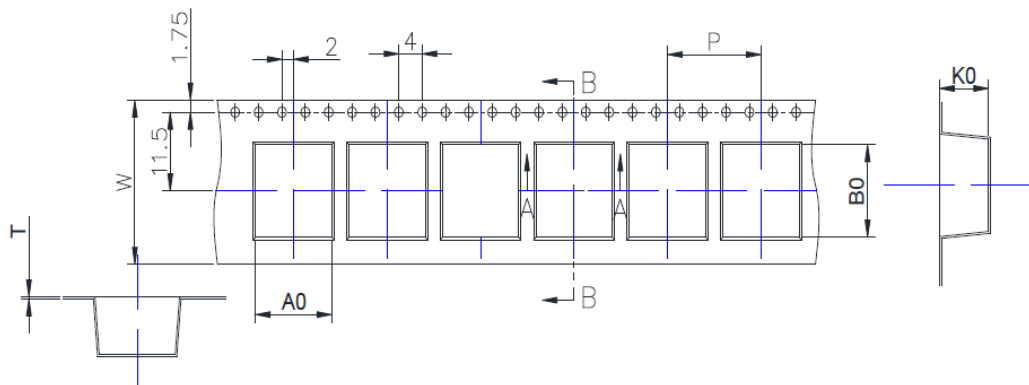

A <sub>0</sub>	B <sub>0</sub>	K <sub>0</sub>	P	T	W
5.5 ± 0.1	9.8 ± 0.1	10.0 ± 0.1	16.0 ± 0.1	0.4 ± 0.05	24.0 ± 0.3

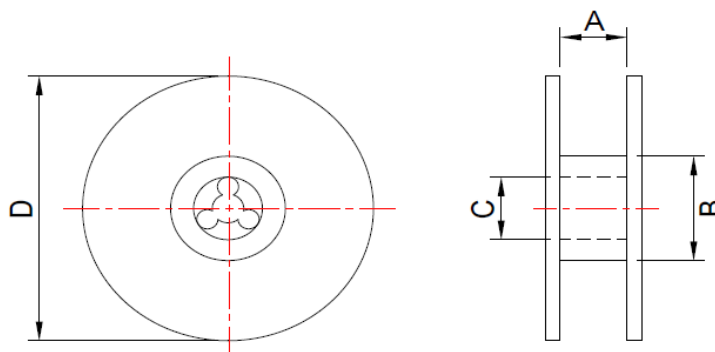

A	B	C	D
24.0 ± 0.5	100 ± 2.0	13.5 ± 0.5	330 Ref.

Dimensions: mm

**ATTENTION:** Abracon LLC's products are COTS – Commercial-Off-The-Shelf products; suitable for Commercial, Industrial and, where designated, Automotive Applications. Abracon's products are not specifically designed for Military, Aviation, Aerospace, Life-dependent Medical applications or any application requiring high reliability where component failure could result in loss of life and/or property. For applications requiring high reliability and/or presenting an extreme operating environment, written consent and authorization from Abracon LLC is required. Please contact Abracon LLC for more information.



5101 Hidden Creek Ln, Spicewood TX 78669  
 Phone: 512-371-6159 Fax: 512-351-8858  
 For terms and conditions of sales, please visit:  
[www.abracon.com](http://www.abracon.com)

**REVISION Initial Release :**  
 6/10/2024

ABRACON IS  
 ISO9001-2015  
 CERTIFIED

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Power Inductors - SMD category](#):*

*Click to view products by [Abracon manufacturer](#):*

Other Similar products are found below :

[SPD62R-472M](#) [LLQPB201214T1R0M](#) [LLXND3030QKT470MNG](#) [LLQPB160807T4R7M](#) [LLAPB2016KKTR33M](#)  
[LBXND4040TKL330MDG](#) [LSQEA201212T100M](#) [PA4300.474NLT](#) [LVS505020-1R0T-N](#) [LVS505040-1R2T-N](#) [LVS606020-1R5M-N](#)  
[LVS606028-6R8M-N](#) [LVS606045-102M-N](#) [LVS606045-150M-N](#) [LVS606045-1R8M-N](#) [LVS606045-6R8M-N](#) [LVS808040-2R0M-N](#)  
[LVS808040-330M-N](#) [LVS808040-4R7M-N](#) [MHCI06030-R56M-R8](#) [SCD0403T-470M-N](#) [SCD0403T-6R8K-N](#) [SCD0504T-101M-N](#)  
[SCD0504T-120M-N](#) [SCD0504T-221M-N](#) [SCD0504T-470M-N](#) [SCD0504T-471M-N](#) [SCD0705T-180M-N](#) [SCD0705T-221M-N](#) [SCD0705T-470M-N](#) [SCD1005T-101M-N](#) [SCD1005T-221M-N](#) [SCD1005T-470M-N](#) [SSL1306T-101M-N](#) [LQB15NNR27K10D](#) [201610CDMCDDS-R47MC](#) [201610CDMCDDS-1R0MC](#) [201610CDMCDDS-R68MC](#) [LSQPB201210T220M](#) [LBCNF2012KKTR24MA](#) [LSQEA201212T220K](#)  
[LSENC2016KKT1R0M](#) [LSQNB160808T470M](#) [LSBHB1608KKT2R2MG](#) [LSQPB160807T2R2M](#) [LSQEA201212T101K](#) [DEM8045Z-5R6N=P3](#) [LCXND3030QKT4R7MNG](#) [LSQPA322525T6R8MR](#) [LCXNH8080YKL101MJG](#)