

Features

- HCMOS Output
- Stabilities to ± 20 PPM
- Temperature Ranges to -40°C to $+85^{\circ}\text{C}$
- Supply Voltage: 5.0V

ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (F_0)	1 ~ 125MHz
Temperature Range	
Storage (T_{STG})	$-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Supply Voltage (V_{DD})	5.0V $\pm 10\%$
Input Current (I_{DD})	
1.000 ~ 25.000MHz	25 mA
25.000+ ~ 50.000MHz	40 mA
50.000+ ~ 67.000MHz	60 mA
67.000+ ~ 80.000MHz	73 mA
80.000+ ~ 125.000MHz	90 mA
Output Symmetry (50% V_{DD})	
1 ~ 80MHz	45/55%
80+ ~ 125MHz	40/60%
Rise/Fall Time (10%/90% V_{DD} Levels) (T_R/T_F)	
1 ~ 80.000MHz	7nS
80+ ~ 100MHz	5nS
100+ ~ 125MHz	4nS
Output Voltage (V_{OL})	10 % V_{DD}
(V_{OH})	90 % V_{DD} Min
Output Load (HCMOS)	50 pF
Start-up Time (T_S)	10 mS
Output Disable Time ¹	100 nS
Output Enable Time ¹	100 nS


ENABLE / DISABLE FUNCTION	
Pin1	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

Available Options by Stability & Operating Temp		
Frequency Stability	Operating Temperature ($^{\circ}\text{C}$)	Frequency Range (MHz)
$\pm 100\text{PPM}^2$	$-10 \sim +70$	1.000 ~ 125.000
$\pm 100\text{PPM}^2$	$-40 \sim +85$	1.000 ~ 125.000
$\pm 50\text{PPM}^2$	$-10 \sim +70$	1.000 ~ 125.000
$\pm 50\text{PPM}^2$	$-40 \sim +85$	1.000 ~ 125.000
$\pm 25\text{PPM}^2$	$-10 \sim +70$	1.000 ~ 125.000
$\pm 25\text{PPM}^3$	$-40 \sim +85$	1.000 ~ 80.000
$\pm 20\text{PPM}^3$	$-10 \sim +70$	1.000 ~ 80.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Reflow, one year aging, shock, and vibration.

³ Inclusive of 25°C tolerance and operating temperature range.

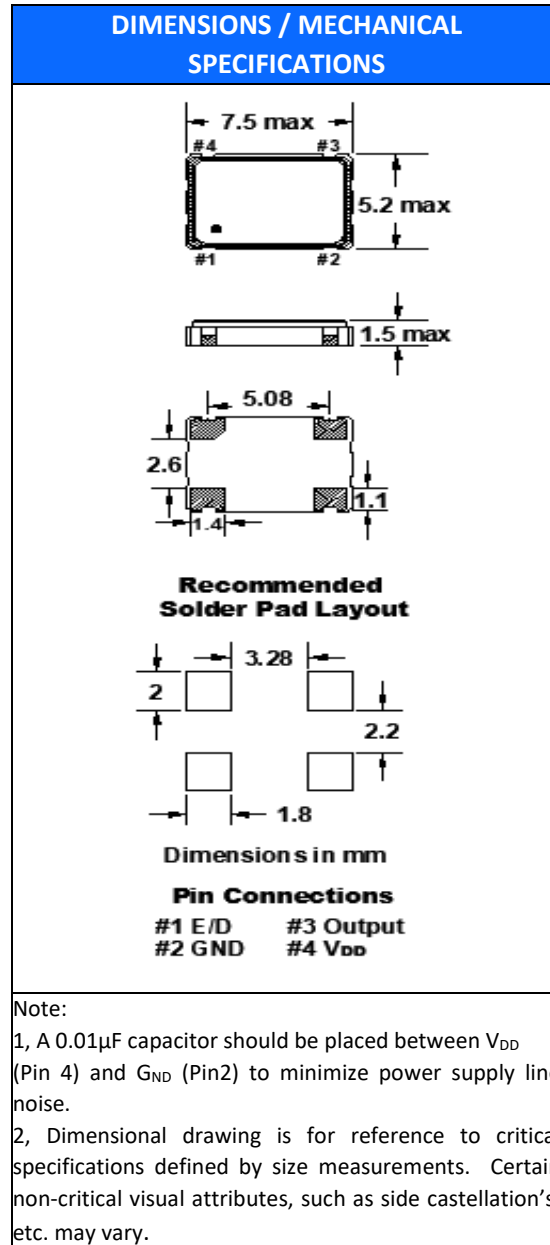

STANDARD SPECIFICATIONS	
PARAMETERS	MAX (Unless otherwise noted)
Maximum Soldering Temp / Time	260°C / 10 Seconds x 2
Moisture Sensitivity Level (MSL)	N/A
Termination Finish	Au (0.3~1 μ m) over Ni (1.27~8.89 μ m)
Seal Method	Seam
Lead (Pb) Free	Yes
RoHS Compliant	Yes, no exemptions
REACH Compliant (latest version)	Yes


FO7HH

(Former F3345 Series)

7mm x 5mm
HCMOS SMD Oscillator



TAPE SPECIFICATIONS (mm)							REEL SPECIFICATIONS (mm)						
A	B	C	D	E	F	REEL QTY	G	H	I	J	K	L	M
ø1.5	4.0	8.0	7.5	16.0	2.15	-T1 = 1,000 -T2 = 2,000	2.0	ø13	ø21	ø80	ø255	17.5	2.0

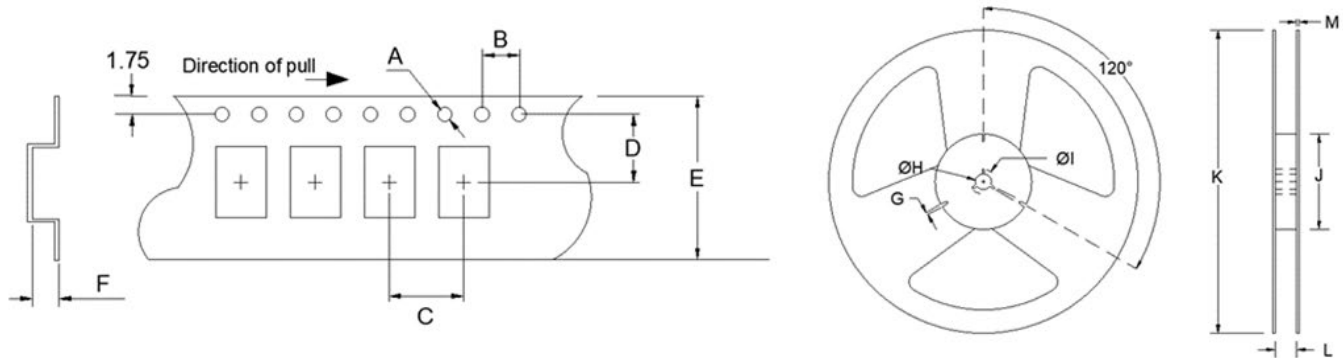

Available Options & Part Identification*

Sample PN: **FO7HHABM25.0-T2**

F	O7HH	A	B	M	25.0	-T2
Fox	Model Number	Voltage A = 5V±10%	Stability A = ±100 PPM B = ±50 PPM D = ±25 PPM E = ±20 PPM	Operating Temperature E = -10 to +70°C M = -40 to +85°C	Frequency (MHz)	Values Added Options Blank = Bulk T1 = 1,000 pcs T2 = 2,000 pcs

* Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available.
 See stabilities and op temps for each V_{DD}.

Reliability Test Conditions

Please contact Abracon Quality Assurance department

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-12](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#)
[SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.000000](#) [8208AC-82-18E-25.000000](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.0000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.000000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.000000](#) [9102AI-232H25S125.000000](#) [9102AI-133N25E200.000000](#) [9102AC-283N25E200.000000](#) [9001AC-33-33E1-30.000](#) [XLH536125.000JS4I](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [SIT1602BC-83-33E-10.000000Y](#) [8003AI-12-33S-40.00000Y](#)