

Features

- HCMOS Output
- Stabilities to ± 20 PPM
- Temperature Ranges as wide as -40°C to $+125^{\circ}\text{C}$
- Supply Voltages: 1.0V, 1.8V, 2.5V, 3.3V, Variable (1.6V ~ 3.63V; 2.25V ~ 3.63V)

1.0V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range	1.800 ~ 50.000 MHz
Temperature Range	
Storage (T_{STG})	$-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Supply Voltage (V_{DD})	1.0V $\pm 5\%$
Input Current (I_{DD})	
1.800 ~ 32.100 MHz	2.5 mA
>32.100 ~ 50.000 MHz	3.5 mA
Standby Current	100 μA
Output Symmetry (50% V_{DD})	40 % ~ 60 %
Rise/Fall Time (20%/80% V_{DD} Levels) ($T_{\text{R}}/T_{\text{F}}$)	5 nS
Output Voltage (V_{OL})	20 % V_{DD}
(V_{OH})	80 % V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_{S})	10 mS
Output Disable Time ¹	50 μS
Output Enable Time ¹	10 mS

ENABLE / DISABLE FUNCTION	
Pin ¹	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{\text{IH}} \geq 70\%V_{\text{DD}}$	Active
'0' Level $V_{\text{IL}} \leq 30\%V_{\text{DD}}$	High Z

Available Options by Stability & Operating Temp for 1.0V		
Frequency Stability ²	Operating Temperature ($^{\circ}\text{C}$)	Frequency Range (MHz)
$\pm 100\text{PPM}$	$-10 \sim +70$	1.800 ~ 50.000
$\pm 100\text{PPM}$	$-40 \sim +85$	1.800 ~ 50.000
$\pm 50\text{PPM}$	$-10 \sim +70$	1.800 ~ 50.000
$\pm 50\text{PPM}$	$-40 \sim +85$	1.800 ~ 50.000
$\pm 25\text{PPM}$	$-10 \sim +70$	1.800 ~ 50.000
$\pm 25\text{PPM}^3$	$-40 \sim +85$	1.800 ~ 50.000
$\pm 20\text{PPM}^3$	$-10 \sim +70$	1.800 ~ 50.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Shock, vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

1.8V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range	0.625 ~ 133.000 MHz
Temperature Range Storage (T _{STG})	-55°C ~ +125°C
Supply Voltage (V _{DD})	1.8V±5%
Input Current (I _{DD})	
0.625 ~ 32.000 MHz	6 mA
>32.000 ~ 80.000 MHz	15 mA
>80.000 ~ 133.000 MHz	20 mA
Standby Current	10 µA
Output Symmetry (50% V _{DD})	
0.625 ~ 84.999999MHz	45 % ~ 55 %
85.000 ~ 133MHz	40 % ~ 60 %
Rise/Fall Time (20%/80% V _{DD} Levels) (T _R /T _F)	
0.625 ~ 32.000 MHz	5 nS
>32.000 ~ 133.000 MHz	3.5 nS
Output Voltage (V _{OL})	20 % V _{DD}
(V _{OH})	80 % V _{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T _S)	10 mS
Output Disable Time ¹	300 µS
Output Enable Time ¹	10 mS

ENABLE / DISABLE FUNCTION	
Pin ¹	Output (pin 3)
OPEN ¹	Active
'1' Level V _{IH} ≥ 70%V _{DD}	Active
'0' Level V _{IL} ≤ 30%V _{DD}	High Z

Available Options by Stability & Operating Temp for 1.8V		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-10 ~ +70	0.625 ~ 133.000
±100PPM	-40 ~ +85	0.625 ~ 133.000
±50PPM	-10 ~ +70	0.625 ~ 133.000
±50PPM	-40 ~ +85	0.625 ~ 133.000
±25PPM	-10 ~ +70	0.625 ~ 133.000
±25PPM ³	-40 ~ +85	0.625 ~ 133.000
±20PPM ³	-10 ~ +70	0.625 ~ 133.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Shock, vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

2.5V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range	0.625 ~ 170.000 MHz
Temperature Range	
Storage (T _{STG})	-55°C ~ +125°C
Supply Voltage (V _{DD})	2.5V±5%
Input Current (I _{DD})	
0.625 ~ 20.000 MHz	5 mA
>20.000 ~ 40.000 MHz	9 mA
>40.000 ~ 60.000 MHz	11 mA
>60.000 ~ 80.000MHz	20 mA
>80.000 ~ 170.000 MHz	30 mA
Standby Current	10 µA
Output Symmetry (50% V _{DD})	
0.625 ~ 84.999999MHz	45 % ~ 55 %
85.000 ~ 170MHz	40 % ~ 60 %
Rise/Fall Time (10%/90% V _{DD} Levels) (T _R /T _F)	6 nS
Output Voltage (V _{OL})	10 % V _{DD}
(V _{OH})	90 % V _{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T _S)	5 mS
Output Disable Time ¹	150 nS
Output Enable Time ¹	5 mS

ENABLE / DISABLE FUNCTION	
Pin ¹	Output (pin 3)
OPEN ¹	Active
'1' Level V _{IH} ≥ 70%V _{DD}	Active
'0' Level V _{IL} ≤ 30%V _{DD}	High Z

Available Options by Stability & Operating Temp for 2.5V		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-10 ~ +70	0.625 ~ 170.000
±100PPM	-20 ~ +70	0.625 ~ 170.000
±100PPM	-40 ~ +85	0.625 ~ 170.000
±50PPM	-10 ~ +70	0.625 ~ 170.000
±50PPM	-20 ~ +70	0.625 ~ 170.000
±50PPM	-40 ~ +85	0.625 ~ 170.000
±25PPM	-10 ~ +70	0.625 ~ 170.000
±25PPM	-20 ~ +70	0.625 ~ 170.000
±25PPM ³	-40 ~ +85	0.625 ~ 170.000
±20PPM ³	-10 ~ +70	0.625 ~ 170.000
±20PPM ³	-20 ~ +70	0.625 ~ 170.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Shock, vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.



3.3V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range	0.625 ~ 170 MHz
Temperature Range	
Storage (T _{STG})	-55°C ~ +125°C
Supply Voltage (V _{DD})	3.3V±10%
Input Current (I _{DD})	
0.625 ~ 20.000 MHz	7 mA
>20.000 ~ 40.000 MHz	13 mA
>40.000 ~ 60.000 MHz	19 mA
>60.000 ~ 75.000MHz	24 mA
>75.000 ~ 80.000 MHz	30 mA
>80.000 ~ 125.000 MHz	40 mA
>125.000 ~ 170.000 MHz	50 mA
Standby Current	10 µA
Output Symmetry (50% V _{DD})	
0.625 ~ 84.999999MHz	45 % ~ 55 %
85.000 ~ 170MHz	40 % ~ 60 %
Rise/Fall Time (10%/90% V _{DD} Levels) (T _R /T _F)	6 nS
Output Voltage (V _{OL})	10 % V _{DD}
(V _{OH})	90 % V _{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T _S)	5 mS
Output Disable Time ¹	150 nS
Output Enable Time ¹	5 mS

ENABLE / DISABLE FUNCTION	
Pin ¹	Output (pin 3)
OPEN ¹	Active
'1' Level V _{IH} ≥ 70%V _{DD}	Active
'0' Level V _{IL} ≤ 30%V _{DD}	High Z

Available Options by Stability & Operating Temp for 3.3V		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-10 ~ +70	0.625 ~ 170.000
±100PPM	-20 ~ +70	0.625 ~ 170.000
±100PPM	-40 ~ +85	0.625 ~ 170.000
±50PPM	-10 ~ +70	0.625 ~ 170.000
±50PPM	-20 ~ +70	0.625 ~ 170.000
±50PPM	-40 ~ +85	0.625 ~ 170.000
±25PPM	-10 ~ +70	0.625 ~ 170.000
±25PPM	-20 ~ +70	0.625 ~ 170.000
±25PPM ³	-40 ~ +85	0.625 ~ 170.000
±20PPM ³	-10 ~ +70	0.625 ~ 170.000
±20PPM ³	-20 ~ +70	0.625 ~ 170.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Shock, vibration, reflow, and one year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

VARIABLE VOLTAGE ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range	0.75 ~ 156.25 MHz
Temperature Range Storage (T _{STG})	-55°C ~ +125°C
Supply Voltage (V _{DD})	
1.25 ~ 135.0 MHz	1.6V ~ 3.63V
>135.0 ~ 156.25 MHz	2.25V ~ 3.63V
Input Current (I _{DD})	
0.750 ~ 19.999 MHz	4 mA
20.000 ~ 39.999 MHz	6 mA
40.000 ~ 59.999 MHz	10 mA
60.000 ~ 84.999 MHz	15 mA
85.000 ~ 135.000 MHz	23 mA
>135.000 ~ 156.250 MHz	30 mA
Standby Current	
T _{OPR} = -40 ~ +85°C	10 µA
T _{OPR} = -40 ~ +105°C / -40 ~ +125°C	20 µA
Output Symmetry (50% V _{DD})	
0.75 ~ 84.999 MHz	45 % ~ 55 %
85.0 ~ 156.25 MHz	40 % ~ 60 %
Rise/Fall Time (10%/90% V _{DD} Levels) (T _R /T _F)	6 nS
Output Voltage (V _{OL})	10 % V _{DD}
(V _{OH})	90 % V _{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T _S)	5 mS
Output Disable Time ¹	200 nS
Output Enable Time ¹	5 mS


ENABLE / DISABLE FUNCTION	
Pin ¹	Output (pin 3)
OPEN ¹	Active
'1' Level V _{IH} ≥ 70%V _{DD}	Active
'0' Level V _{IL} ≤ 30%V _{DD}	High Z

Available Options by Stability & Operating Temp		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-20 ~ +70	0.75 ~ 156.25
±100PPM	-40 ~ +85	0.75 ~ 156.25
±100PPM	-40 ~ +105	1.25 ~ 135.0
±100PPM	-40 ~ +125	1.25 ~ 135.0
±50PPM	-20 ~ +70	0.75 ~ 156.25
±50PPM	-40 ~ +85	0.75 ~ 156.25
±50PPM	-40 ~ +105	1.25 ~ 135.0
±50PPM	-40 ~ +125	1.25 ~ 135.0
±25PPM	-20 ~ +70	0.75 ~ 156.25
±20PPM ³	-40 ~ +85	0.75 ~ 156.25
±20PPM ³	-20 ~ +70	0.75 ~ 156.25

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Shock, vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

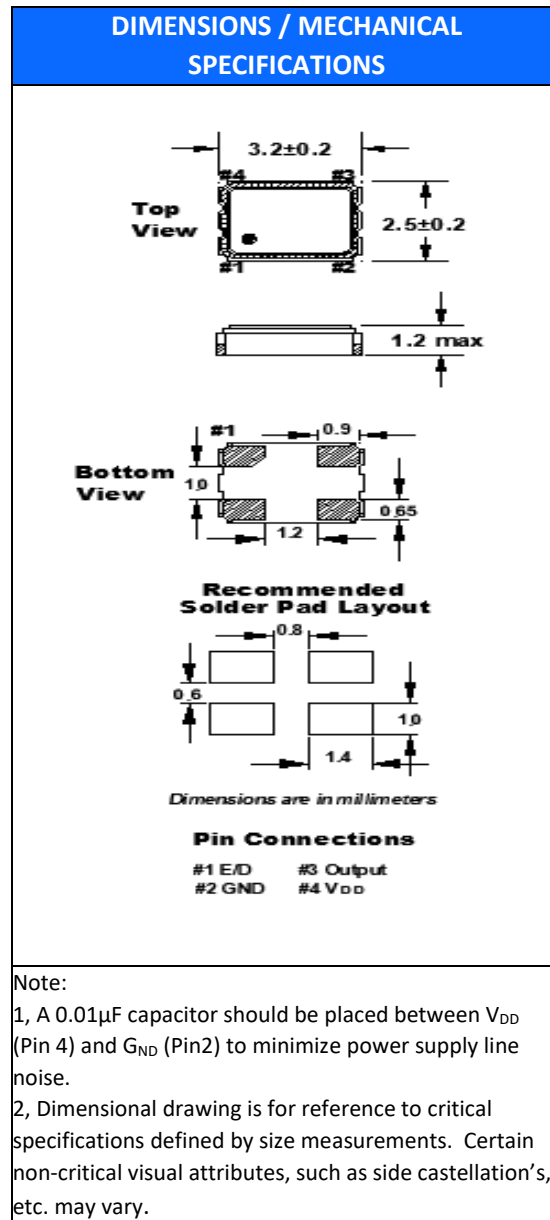

STANDARD SPECIFICATIONS	
PARAMETERS	MAX (Unless otherwise noted)
Maximum Soldering Temp / Time	260°C / 10 Seconds x 2
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni
Seal Method	Seam
Lead (Pb) Free	Yes
RoHS Compliant	Yes, no exemptions
REACH Compliant (latest version)	Yes


FO3HS

(Former F300, F310, F330, F340 Series)

3.2mm x 2.5mm
HCMOS SMD Oscillator



TAPE SPECIFICATIONS (mm)							REEL SPECIFICATIONS (mm)						
A	B	C	D	E	F	REEL QTY	G	H	I	J	K	L	M
ø1.55	4.0	4.0	3.5	8.0	1.4	-T2 = 2,000 Default -T1 = 1,000 -T3 = 3,000	2.0	ø13	ø21	ø60	ø180	9.0	1.2

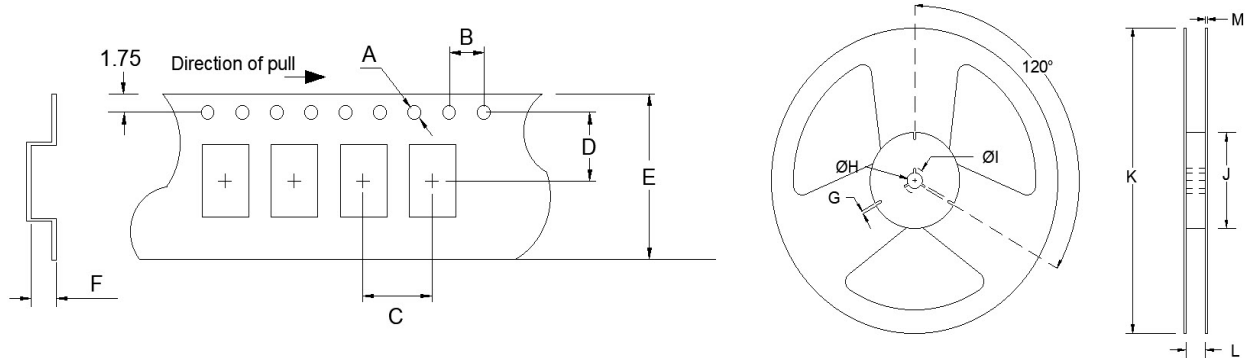

Available Options & Part Identification for SMD Oscillator O3HS*

Sample PN: FO3HSCBM25.0-T2

F	O3HS	C	B	M	25.0	-T2
Fox	Model Number	Voltage M = 1.0V±5% K = 1.8V±5% H = 2.5V±5% C = 3.3V±10% V = 1.6V to 3.63V W = 2.25V to 3.63V	Stability A = ±100 PPM B = ±50 PPM D = ±25 PPM E = ±20 PPM	Operating Temperature E = -10 to +70°C F = -20 to +70°C M = -40 to +85°C P = 40 to +105°C I = -40 to +125°C	Frequency (MHz)	Values Added Options Blank = Bulk T1 = 1,000 pcs T2 = 2,000 pcs T3 = 3,000 pcs

* Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available. See stabilities and op temps for each V_{DD}.

Reliability Test Conditions

Please contact Abracon Quality Assurance department

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Standard Clock Oscillators](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[601252](#) [F335-12](#) [F335-25](#) [F535L-33.333](#) [F535L-50](#) [ASV-20.000MHZ-LR-T](#) [ECS-2018-160-BN-TR](#) [MXO45HS-2C-66.6666MHZ](#)
[SiT8209AI-32-33E-125.000000](#) [SIT8918AA-11-33S-50.000000G](#) [SM4420TEV-40.0M-T1K](#) [F335-24](#) [F335-40](#) [F535L-10](#) [F535L-12](#) [F535L-16](#) [F535L-24](#) [F535L-27](#) [F535L-48](#) [PE7744DW-100.0M](#) [CSX-750FCC14745600T](#) [ASF1-3.686MHZ-N-K-S](#) [XO57CTECNA3M6864](#) [ECS-2100A-147.4](#) [601251](#) [EP16E7E2H26.000MTR](#) [SIT8918AA-11-33S-16.000000G](#) [XO3003](#) [9120AC-2D2-33E212.500000](#) [9102AI-243N25E100.000000](#) [8208AC-82-18E-25.000000](#) [8008AI-72-XXE-24.545454E](#) [8004AC-13-33E-133.33000X](#) [AS-4.9152-16-SMD-TR](#) [ASFL1-48.000MHZ-LC-T](#) [SIT8920AM-31-33E-25.000000](#) [DSC1028DI2-019.2000](#) [9121AC-2C3-25E100.000000](#) [9102AI-233N33E100.00000X](#) [9102AI-233N25E200.000000](#) [9102AI-232H25S125.000000](#) [9102AI-133N25E200.000000](#) [9102AC-283N25E200.000000](#) [9001AC-33-33E1-30.000](#) [XLH536125.000JS4I](#) [3921AI-2CF-33NZ125.000000](#) [5730-1SF](#) [PXA000010](#) [SIT1602BC-83-33E-10.000000Y](#) [8003AI-12-33S-40.00000Y](#)