

Features

- HCMOS Output
- Stabilities to ± 20 PPM
- Temperature Ranges as wide as -40°C to $+125^{\circ}\text{C}$
- Supply Voltages: 1.0V, 1.8V, 2.5V, 3.3V, Variable (1.6V ~ 3.63V; 2.25V ~ 3.63V)

1.0V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range	1.800 ~ 50.000 MHz
Temperature Range	
Storage (T_{STG})	$-55^{\circ}\text{C} \sim +125^{\circ}\text{C}$
Supply Voltage (V_{DD})	1.0V $\pm 5\%$
Input Current (I_{DD})	
1.800 ~ 32.100 MHz	2.5 mA
>32.100 ~ 50.000 MHz	3.5 mA
Standby Current	100 μA
Output Symmetry (50% V_{DD})	40 % ~ 60 %
Rise/Fall Time (20%/80% V_{DD} Levels) (T_R/T_F)	5 nS
Output Voltage (V_{OL})	20 % V_{DD}
(V_{OH})	80 % V_{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T_S)	10 mS
Output Disable Time ¹	50 μS
Output Enable Time ¹	10 mS

ENABLE / DISABLE FUNCTION	
Pin ¹	Output (pin 3)
OPEN ¹	Active
'1' Level $V_{IH} \geq 70\%V_{DD}$	Active
'0' Level $V_{IL} \leq 30\%V_{DD}$	High Z

Available Options by Stability & Operating Temp for 1.0V		
Frequency Stability ²	Operating Temperature ($^{\circ}\text{C}$)	Frequency Range (MHz)
$\pm 100\text{PPM}$	$-10 \sim +70$	1.800 ~ 50.000
$\pm 100\text{PPM}$	$-40 \sim +85$	1.800 ~ 50.000
$\pm 50\text{PPM}$	$-10 \sim +70$	1.800 ~ 50.000
$\pm 50\text{PPM}$	$-40 \sim +85$	1.800 ~ 50.000
$\pm 25\text{PPM}$	$-10 \sim +70$	1.800 ~ 50.000
$\pm 25\text{PPM}^3$	$-40 \sim +85$	1.800 ~ 50.000
$\pm 20\text{PPM}^3$	$-10 \sim +70$	1.800 ~ 50.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Shock, vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

1.8V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range	0.625 ~ 133.000 MHz
Temperature Range Storage (T _{STG})	-55°C ~ +125°C
Supply Voltage (V _{DD})	1.8V±5%
Input Current (I _{DD})	
0.625 ~ 32.000 MHz	6 mA
>32.000 ~ 80.000 MHz	15 mA
>80.000 ~ 133.000 MHz	20 mA
Standby Current	10 µA
Output Symmetry (50% V _{DD})	
0.625 ~ 84.999999MHz	45 % ~ 55 %
85.000 ~ 133MHz	40 % ~ 60 %
Rise/Fall Time (20%/80% V _{DD} Levels) (T _R /T _F)	
0.625 ~ 32.000 MHz	5 nS
>32.000 ~ 133.000 MHz	3.5 nS
Output Voltage (V _{OL})	20 % V _{DD}
(V _{OH})	80 % V _{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T _S)	10 mS
Output Disable Time ¹	300 µS
Output Enable Time ¹	10 mS

ENABLE / DISABLE FUNCTION	
Pin ¹	Output (pin 3)
OPEN ¹	Active
'1' Level V _{IH} ≥ 70%V _{DD}	Active
'0' Level V _{IL} ≤ 30%V _{DD}	High Z

Available Options by Stability & Operating Temp for 1.8V		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-10 ~ +70	0.625 ~ 133.000
±100PPM	-40 ~ +85	0.625 ~ 133.000
±50PPM	-10 ~ +70	0.625 ~ 133.000
±50PPM	-40 ~ +85	0.625 ~ 133.000
±25PPM	-10 ~ +70	0.625 ~ 133.000
±25PPM ³	-40 ~ +85	0.625 ~ 133.000
±20PPM ³	-10 ~ +70	0.625 ~ 133.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Shock, vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

2.5V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range	0.625 ~ 170.000 MHz
Temperature Range	
Storage (T _{STG})	-55°C ~ +125°C
Supply Voltage (V _{DD})	2.5V±5%
Input Current (I _{DD})	
0.625 ~ 20.000 MHz	5 mA
>20.000 ~ 40.000 MHz	9 mA
>40.000 ~ 60.000 MHz	11 mA
>60.000 ~ 80.000MHz	20 mA
>80.000 ~ 170.000 MHz	30 mA
Standby Current	10 µA
Output Symmetry (50% V _{DD})	
0.625 ~ 84.999999MHz	45 % ~ 55 %
85.000 ~ 170MHz	40 % ~ 60 %
Rise/Fall Time (10%/90% V _{DD} Levels) (T _R /T _F)	6 nS
Output Voltage (V _{OL})	10 % V _{DD}
(V _{OH})	90 % V _{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T _S)	5 mS
Output Disable Time ¹	150 nS
Output Enable Time ¹	5 mS

ENABLE / DISABLE FUNCTION	
Pin ¹	Output (pin 3)
OPEN ¹	Active
'1' Level V _{IH} ≥ 70%V _{DD}	Active
'0' Level V _{IL} ≤ 30%V _{DD}	High Z

Available Options by Stability & Operating Temp for 2.5V		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-10 ~ +70	0.625 ~ 170.000
±100PPM	-20 ~ +70	0.625 ~ 170.000
±100PPM	-40 ~ +85	0.625 ~ 170.000
±50PPM	-10 ~ +70	0.625 ~ 170.000
±50PPM	-20 ~ +70	0.625 ~ 170.000
±50PPM	-40 ~ +85	0.625 ~ 170.000
±25PPM	-10 ~ +70	0.625 ~ 170.000
±25PPM	-20 ~ +70	0.625 ~ 170.000
±25PPM ³	-40 ~ +85	0.625 ~ 170.000
±20PPM ³	-10 ~ +70	0.625 ~ 170.000
±20PPM ³	-20 ~ +70	0.625 ~ 170.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Shock, vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

3.3V ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range	0.625 ~ 170 MHz
Temperature Range	
Storage (T _{STG})	-55°C ~ +125°C
Supply Voltage (V _{DD})	3.3V±10%
Input Current (I _{DD})	
0.625 ~ 20.000 MHz	7 mA
>20.000 ~ 40.000 MHz	13 mA
>40.000 ~ 60.000 MHz	19 mA
>60.000 ~ 75.000MHz	24 mA
>75.000 ~ 80.000 MHz	30 mA
>80.000 ~ 125.000 MHz	40 mA
>125.000 ~ 170.000 MHz	50 mA
Standby Current	10 µA
Output Symmetry (50% V _{DD})	
0.625 ~ 84.999999MHz	45 % ~ 55 %
85.000 ~ 170MHz	40 % ~ 60 %
Rise/Fall Time (10%/90% V _{DD} Levels) (T _R /T _F)	6 nS
Output Voltage (V _{OL})	10 % V _{DD}
(V _{OH})	90 % V _{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T _S)	5 mS
Output Disable Time ¹	150 nS
Output Enable Time ¹	5 mS

ENABLE / DISABLE FUNCTION	
Pin ¹	Output (pin 3)
OPEN ¹	Active
'1' Level V _{IH} ≥ 70%V _{DD}	Active
'0' Level V _{IL} ≤ 30%V _{DD}	High Z

Available Options by Stability & Operating Temp for 3.3V		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-10 ~ +70	0.625 ~ 170.000
±100PPM	-20 ~ +70	0.625 ~ 170.000
±100PPM	-40 ~ +85	0.625 ~ 170.000
±50PPM	-10 ~ +70	0.625 ~ 170.000
±50PPM	-20 ~ +70	0.625 ~ 170.000
±50PPM	-40 ~ +85	0.625 ~ 170.000
±25PPM	-10 ~ +70	0.625 ~ 170.000
±25PPM	-20 ~ +70	0.625 ~ 170.000
±25PPM ³	-40 ~ +85	0.625 ~ 170.000
±20PPM ³	-10 ~ +70	0.625 ~ 170.000
±20PPM ³	-20 ~ +70	0.625 ~ 170.000

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Shock, vibration, reflow, and one year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

VARIABLE VOLTAGE ELECTRICAL CHARACTERISTICS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range	0.75 ~ 156.25 MHz
Temperature Range Storage (T _{STG})	-55°C ~ +125°C
Supply Voltage (V _{DD})	
1.25 ~ 135.0 MHz	1.6V ~ 3.63V
>135.0 ~ 156.25 MHz	2.25V ~ 3.63V
Input Current (I _{DD})	
0.750 ~ 19.999 MHz	4 mA
20.000 ~ 39.999 MHz	6 mA
40.000 ~ 59.999 MHz	10 mA
60.000 ~ 84.999 MHz	15 mA
85.000 ~ 135.000 MHz	23 mA
>135.000 ~ 156.250 MHz	30 mA
Standby Current	
T _{OPR} = -40 ~ +85°C	10 µA
T _{OPR} = -40 ~ +105°C / -40 ~ +125°C	20 µA
Output Symmetry (50% V _{DD})	
0.75 ~ 84.999 MHz	45 % ~ 55 %
85.0 ~ 156.25 MHz	40 % ~ 60 %
Rise/Fall Time (10%/90% V _{DD} Levels) (T _R /T _F)	6 nS
Output Voltage (V _{OL})	10 % V _{DD}
(V _{OH})	90 % V _{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T _S)	5 mS
Output Disable Time ¹	200 nS
Output Enable Time ¹	5 mS


ENABLE / DISABLE FUNCTION	
Pin ¹	Output (pin 3)
OPEN ¹	Active
'1' Level V _{IH} ≥ 70%V _{DD}	Active
'0' Level V _{IL} ≤ 30%V _{DD}	High Z

Available Options by Stability & Operating Temp		
Frequency Stability ²	Operating Temperature (°C)	Frequency Range (MHz)
±100PPM	-20 ~ +70	0.75 ~ 156.25
±100PPM	-40 ~ +85	0.75 ~ 156.25
±100PPM	-40 ~ +105	1.25 ~ 135.0
±100PPM	-40 ~ +125	1.25 ~ 135.0
±50PPM	-20 ~ +70	0.75 ~ 156.25
±50PPM	-40 ~ +85	0.75 ~ 156.25
±50PPM	-40 ~ +105	1.25 ~ 135.0
±50PPM	-40 ~ +125	1.25 ~ 135.0
±25PPM	-20 ~ +70	0.75 ~ 156.25
±20PPM ³	-40 ~ +85	0.75 ~ 156.25
±20PPM ³	-20 ~ +70	0.75 ~ 156.25

¹ An internal pull-up resistor from pin 1 to pin 4 allows active output if pin 1 is left open

² Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, Shock, vibration, reflow, and one-year aging.

³ Inclusive of 25°C tolerance and operating temperature range.

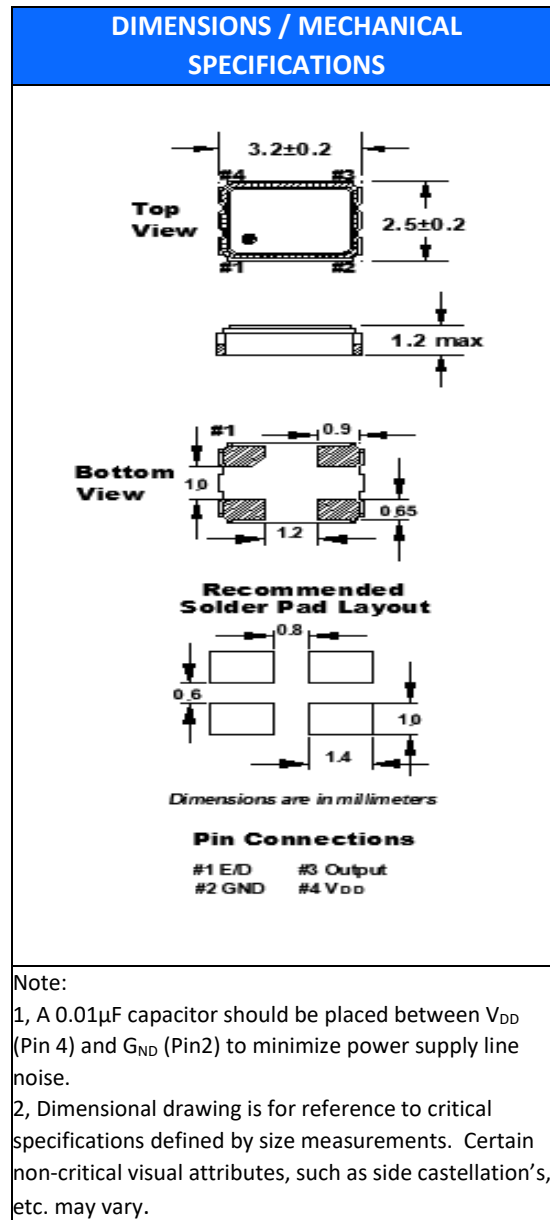

STANDARD SPECIFICATIONS	
PARAMETERS	MAX (Unless otherwise noted)
Maximum Soldering Temp / Time	260°C / 10 Seconds x 2
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni
Seal Method	Seam
Lead (Pb) Free	Yes
RoHS Compliant	Yes, no exemptions
REACH Compliant (latest version)	Yes


FO3HS

(Former F300, F310, F330, F340 Series)

3.2mm x 2.5mm
HCMOS SMD Oscillator



TAPE SPECIFICATIONS (mm)							REEL SPECIFICATIONS (mm)						
A	B	C	D	E	F	REEL QTY	G	H	I	J	K	L	M
ø1.55	4.0	4.0	3.5	8.0	1.4	-T2 = 2,000 Default -T1 = 1,000 -T3 = 3,000	2.0	ø13	ø21	ø60	ø180	9.0	1.2

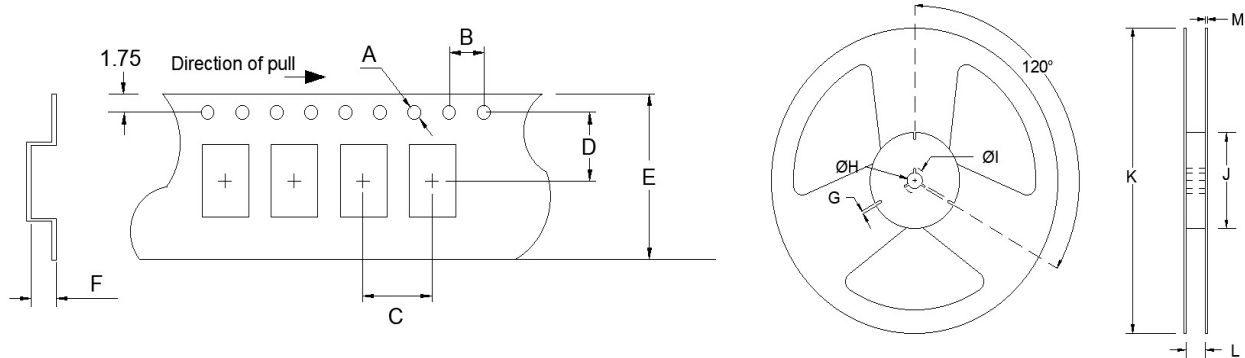

Available Options & Part Identification for SMD Oscillator O3HS*

Sample PN: FO3HSCBM25.0-T2

F	O3HS	C	B	M	25.0	-T2
Fox	Model Number	Voltage M = 1.0V±5% K = 1.8V±5% H = 2.5V±5% C = 3.3V±10% V = 1.6V to 3.63V W = 2.25V to 3.63V	Stability A = ±100 PPM B = ±50 PPM D = ±25 PPM E = ±20 PPM	Operating Temperature E = -10 to +70°C F = -20 to +70°C M = -40 to +85°C P = 40 to +105°C I = -40 to +125°C	Frequency (MHz)	Values Added Options Blank = Bulk T1 = 1,000 pcs T2 = 2,000 pcs T3 = 3,000 pcs

* Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available. See stabilities and op temps for each V_{DD}.

Reliability Test Conditions

Please contact Abracon Quality Assurance department

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Crystals](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[MC405 32.0000K-R3:PURE SN](#) [7B-27.000MBBK-T](#) [MP1-8.0 99-BU](#) [9B-15.360MBBK-B](#) [PTX-A2JM-10.000M](#) [9C-7.680MBBK-T](#) [H10S-12.000-18-EXT-TR](#) [R38-32.768-12.5-5PPM-NPB](#) [BTD1062E05A-513](#) [21U15A-21.4MHZ](#) [RTX-781DF1-S-20.950](#) [LFXTAL066198Cutt](#) [9C-14.31818MBBK-T](#) [A-11.000MHZ-27](#) [SPT2A-.032768B](#) [SPT2A.032768G](#) [SSPT7F-9PF20-R](#) [FX325BS-38.88EEM1201](#) [MP-1-25.000MHZ-3L](#) [MP-1-6.000MHZ](#) [LFXTAL065253Cutt](#) [LFXTAL066431Cutt](#) [XT9S20ANA14M7456](#) [XT9SNLANA16M](#) [646G-24-2](#) [7B-30.000MBBK-T](#) [6504-202-1501](#) [6526-202-1501](#) [BTJ120E02C](#) [SG636PCE-20.000MC](#) [3404](#) [CM315D32768EZFT](#) [C1E-24.000-7-2020-R](#) [C1E-19.200-12-1530-X-R](#) [C1E-16.000-12-1530-X-R](#) [ABM11-16.000MHZ-9-B1U-T](#) [FL5000014](#) [EUCA18-3.1872M](#) [425F35E027M0000](#) [17196](#) [ABM3-13.52313MHZ-10-B4Y-T](#) [MS3V-T1R-32.768kHz-7pF-20PPM-TA-QC-Au](#) [VXM7-1C1-16M000](#) [MS1V-T1K-32.768kHz-10pF-20PPM-TA-QC-Au](#) [MS3V-T1R-32.768kHz-9pF-20PPM-TA-QC-Au](#) [ECS-80-18-30-JGN-TR](#) [17000](#) [17301](#) [16875](#)