

FT5HV

(Former FOX924E)

5.0mm x 3.2mm


HCMOS VCTCXO



Features

- Digital Temperature Compensation

STANDARD SPECIFICATIONS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range (MHz)	8.000 ~ 40.000
Temperature Range	
Operating (T _{OPR})	See table below
Storage (T _{STG})	-40°C ~ +85°C
Supply Voltage (V _{DD})	3.3 VDC±5%
Input Current (I _{DD})	6.0 mA
Initial Frequency Tolerance @ 25°C (after reflow) (T5CV: V _c = 1.65V) ¹	±2.0 PPM
Frequency Stability	
Over Temperature Range	See table below
Over Supply Voltage Change (3.3V±5%)	±0.3 PPM
Over Load Change (15pF ±5%)	±0.3 PPM
Rise Time (0.5V ~ 80% V _{DD})	10 nS
Fall Time (80% V _{DD} ~ 0.5V)	10 nS
Symmetry (50% V _{DD})	40% ~ 60%
Output Voltage (V _{OL})	0.5V
(V _{OH})	80% V _{DD} Min
Output Load	15pF
Pullability	
(T5HV: V _c = 1.65V ±1.0V) ¹	±3 ~ ±20 PPM min
Aging per year	±1.0 PPM
Startup Time (T _s)	2.0 mS Max
Phase Noise	
@ 1kHz offset	-130 dBc/Hz Typical
Reflow Soldering Temp	260°C / 10 Seconds x 2
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni
Lead-Free	Yes
RoHS/REACH Compliant	Yes

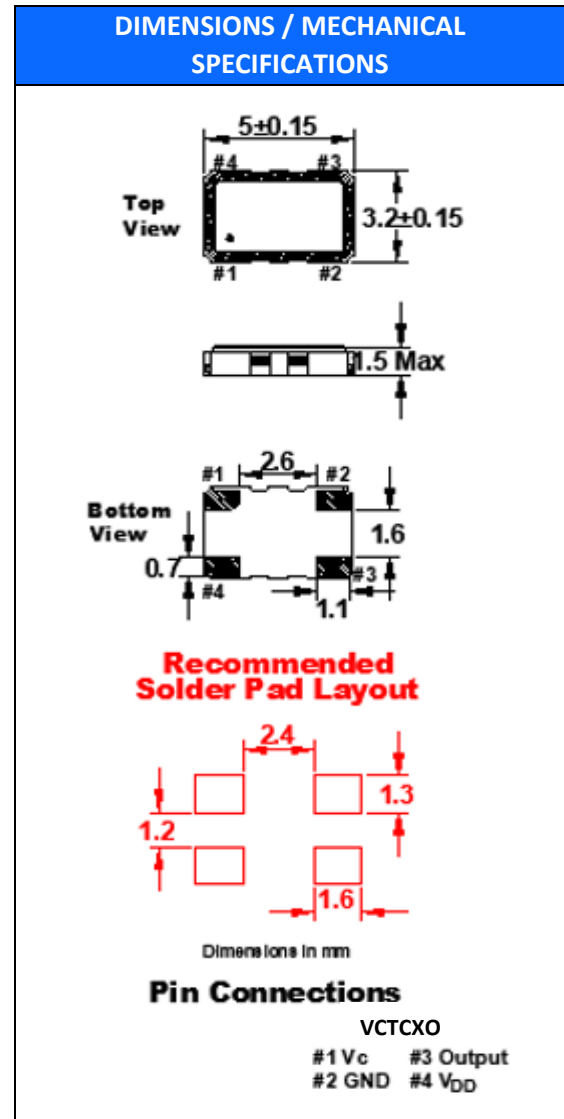

Available Options by Stability & Operating Temp				
Operating Temperature	±1 PPM	±1.5 PPM	±2 PPM	±2.5 PPM
-30 ~ +85°C	O	O	O	O
-40 ~ +85°C	X	O	O	O

Key: O = Available, X = Not Available

¹For proper operation, a control voltage (V_c) must be applied to pin 1 of VCTCXO's. All specifications subject to change without notice.

FT5HV


(Former FOX924E)

5.0mm x 3.2mm

HCMOS VCTCXO



TAPE SPECIFICATIONS (mm)							REEL SPECIFICATIONS (mm)						
A	B	C	D	E	F	REEL QTY	G	H	I	J	K	L	M
ø1.5	4.0	8.0	5.5	12.0	1.7	-T1 = 1,000	2.0	ø13	ø21	ø80	ø180	13.5	2.0

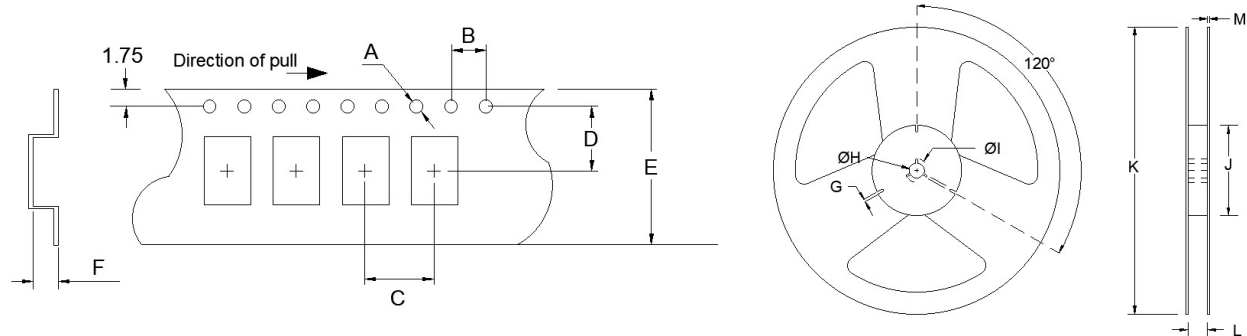

Available Options & Part Identification for VCTCXO Model T5HV¹

Sample PN: FT5HVBPK25.0-T1

F	T5HV	B	P	K	25.0	-T1
Fox	Model Number T5HV = VCTCXO	Voltage B = +3.3V±5%	Stability T = ±1.0 PPM S = ±1.5 PPM R = ±2.0 PPM P = ±2.5 PPM	Operating Temperature K = -30 to +85°C M = -40 to +85°C	Frequency (MHz)	Values Added Options Blank = Bulk T1 = 1,000 pcs

¹ Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available. See stabilities/operating temp table.

Reliability Test Conditions

Please contact Abracon Quality Assurance department

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [TCXO Oscillators](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[SiT5000AI-3D-33E0-10.000000X](#) [THD3031035LK280005-10.0M](#) [CVT32-10.000](#) [SIT5356AI-FQ-33E0-25.000000X](#) [SIT5357AI-FQ-33N0-100.000000X](#) [DS32KHZSN+T&R](#) [XTCLH25M000THJA0P0](#) [LFTCXO075793Cutt](#) [LFTCXO077229Cutt](#) [LFPTXO000002Bulk](#) [LFTCXO077228Cutt](#) [LFTCXO077230Cutt](#) [LFTCXO075792Cutt](#) [LFPTXO000001Bulk](#) [LFTCXO063711BULK](#) [LFTCXO063713BULK](#) [LFTCXO063715BULK](#) [LFTCXO063780BULK](#) [LFTCXO070027Cutt](#) [LFTCXO070028Cutt](#) [LFTCXO070033Cutt](#) [LFTCXO070037Cutt](#) [LFTCXO070179Cutt](#) [LFTCXO070180Cutt](#) [LFTCXO007009BULK](#) [XNCLH20M000CHJA3P0](#) [XNCLH25M000THJA0P0](#) [XNCLH30M720THJA1P0](#) [XTCLH16M384THJA2P0](#) [XTCLH20M000CHJA0P0](#) [XTCLH30M720THJA0P0](#) [NT2016SA-26.000000MHZ-NBG2](#) [SIT1552AI-JE-DCC-32.768E](#) [SIT1566AI-JE-18E-32.768E](#) [SIT1552AI-JF-DCC-32.768D](#) [SIT1566AI-JV-18E-32.768E](#) [SIT5000AICGE-33N0-25.000000X](#) [SiT5021AI-2BE-33VQ200.000000X](#) [SiT5155AI-FK-33E0-10.000000X](#) [SiT5155AI-FK-33VT-10.000000X](#) [SiT5156AI-FK-33E0-25.000000X](#) [SiT5157AI-FK-33N0-100.000000X](#) [7Q16300001](#) [7L-38.400MDG-T](#) [7Z-26.000MDG-T](#) [7Z-26.000MBG-T](#) [LFTCXO075792](#) [LFTCXO075797](#) [LFPTXO000009Bulk](#) [SiT5000AICGE-33E0-25.000000X](#)