

ECN/PCN No.: 3937

For Manufacturer			
Product Description: Voltage Controlled Crystal Oscillator VCXO	Abracon Part Number / Part Series: FY3H Series	<input type="checkbox"/> Documentation only <input type="checkbox"/> ECN <input checked="" type="checkbox"/> EOL	<input checked="" type="checkbox"/> Series <input type="checkbox"/> Part Number
Affected Revision: Rev. A	New Revision: EOL	Application: <input type="checkbox"/> Safety <input checked="" type="checkbox"/> Non-Safety	
Prior to Change: FY3H Rev. A https://abracon.com/datasheets/Fox/FY3H.pdf			
After Change: EOL			
Cause/Reason for Change: Discontinuation of manufacturing capability			
Change Plan			
Effective Date: 08/18/21	Additional Remarks: N/A		
Change Declaration: N/A			
Issued Date: 08/18/21	Issued By: <i>Stephanie Lopez</i>	Issued Department: Engineering	
Approval: <i>Thomas Culhane</i> Engineering Director	Approval: <i>Reuben Quintanilla</i> Quality Director	Approval: <i>Ying Huang</i> Purchasing Director	
For Abracon EOL only			
Last Time Buy (if applicable): None	Alternate Part Number / Part Series: None		
Additional Approval:	Additional Approval:	Additional Approval:	
Customer Approval (If Applicable)			
Qualification Status: <input type="checkbox"/> Approved <input type="checkbox"/> Not accepted <i>Note: It is considered approved if there is no feedback from the customer 1 month after ECN/PCN is released.</i>			
Customer Part Number:		Customer Project:	
Company Name:	Company Representative:	Representative Signature:	
Customer Remarks:			


Features

- VCXO
- Supply Voltage: 3.3V

SPECIFICATIONS	
PARAMETERS	MAX (Unless otherwise noted)
Frequency Range	1.25~ 125.000 MHz
Temperature Range	
Operating (T _{OPR})	See Table
Storage (T _{STG})	-55°C ~ +125°C
Frequency Stability	(See options below)
Pull ability (V _C = 1.65V ± 1.65V)	±100ppm
Supply Voltage (V _{DD})	3.3V ± 10%
Control Voltage (V _C)	1.65V ± 1.65V
Input Current (I _{DD})	
1.25 ~ 50.000MHz	10 mA
50+ ~ 80.000MHz	15 mA
80+ ~ 100.000MHz	20 mA
100+ ~ 125MHz	25 mA
Output Symmetry (50% V _{DD})	40% ~ 60%
Rise/Fall Time (20% ~ 80% V _{DD}) (T _R /T _F)	5 nS
Output Voltage (V _{OL})	10%V _{DD}
(V _{OH})	90%V _{DD} Min
Output Load (HCMOS)	15 pF
Start-up Time (T _S)	10 mS
Frequency Linearity	± 10%
Modulation Bandwidth	20 kHz Min
V _C Input Impedance	5MΩ typ

Available Options by Stability & Operating Temp		
Frequency Stability	Operating Temperature (°C)	Frequency Range (MHz)
±25PPM ¹	-10 ~ +70	1.25 ~ 125.0
±50PPM ¹	-10 ~ +70	1.25 ~ 125.0
±50PPM ¹	-40 ~ +85	1.25 ~ 125.0

¹Inclusive of 25°C tolerance, operating temperature range, input voltage change, load change, shock, Vibration, reflow, and one-year aging and V_C=1.65V.

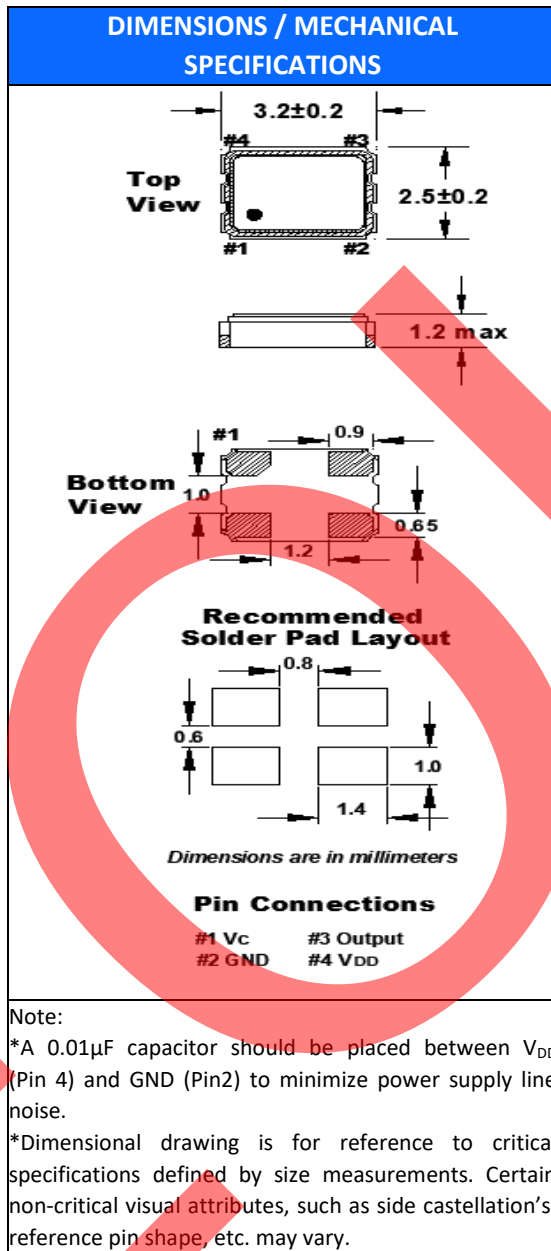

STANDARD SPECIFICATIONS	
PARAMETERS	MAX (Unless otherwise noted)
Maximum Soldering Temp / Time	260°C / 10 Seconds x 2
Moisture Sensitivity Level (MSL)	1
Termination Finish	Au over Ni
Seal Method	Seam
Lead (Pb) Free	Yes
ROHS/REACH Compliant	Yes


FY3H

(Former FVM Series)

3.2mm x 2.5mm
HCMOS SMD VCXO



TAPE SPECIFICATIONS (mm)							REEL SPECIFICATIONS (mm)						
A	B	C	D	E	F	REEL QTY	G	H	I	J	K	L	M
ø1.55	4.0	4.0	3.5	8.0	1.4	-T3 = 3,000 -T1 = 1,000	2.0	ø13	ø21	ø60	ø180	9.0	1.2

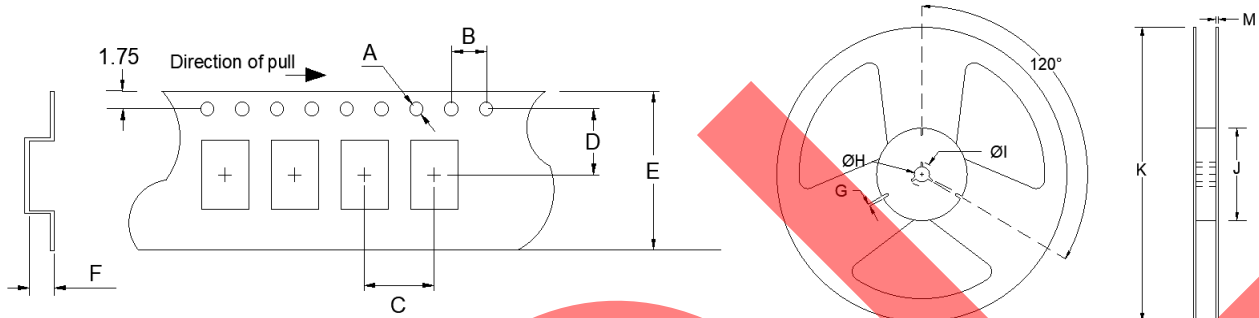

Available Options & Part Identification for HCMOS SMD VCXO Y3H*

Sample PN: **FY3HCJM27.0-T3**

F	Y3H	C	J	M	27.0	-T3
Fox	Model Number	Voltage C = 3.3V±10%	Stability/Pull ability H = ±25ppm/±100ppm J = ±50ppm/±100PPM	Operating Temperature E = -10 to +70°C M = -40 to +85°C	Frequency (MHz)	Values Added Options Blank = Bulk T1 = 1,000 pcs T3 = 3,000 pcs

* Not all frequencies in the frequency range, or every combination of stability, temp range, and voltage available.

Reliability Test Conditions

Please contact Abracon Quality Assurance department

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [VCXO Oscillators](#) category:

Click to view products by [Abracon](#) manufacturer:

Other Similar products are found below :

[3808AI-DF-33NG-80.0000](#) [SIT3808AI-CF-33EM-50.000000X](#) [603281](#) [YNETHE125](#) [SiT3701AC-43-33C-10.00000X](#) [315LB3I1250T](#)
[CVPD-922X-100.000](#) [CVSS-945-125.000](#) [ASVV-4.096 MHz-L50-N152-T](#) [CVHD-950-122.880](#) [CVHD-950-80.000](#) [CVHD950X-54.000](#)
[ASG-P-V-A-1.000GHZ](#) [ECXV-P37C2M-640.000](#) [CVPD-920-80.000](#) [CVHD-957-22.57920](#) [ECXV-P37C2N-155.520](#) [ECXV-P37C2N-56.000](#)
[ECXV-P37C2N-184.320](#) [ECXV-P37C2N-155.000](#) [ECXV-P35C2N-155.520](#) [LFVCXO067515Bulk](#) [ASG-D-V-A-1.000GHZ](#) [ASG-D-V-A-](#)
[491.520MHz](#) [CVHD-950-74.25](#) [CVPD-920-74.25](#) [ABLNO-V-92.160MHZ](#) [ABLNO-V-120.000MHZ](#) [ABLNO-V-80.000MHZ](#) [ABLJO-V-](#)
[100.000MHZ](#) [ABLJO-V-120.000MHZ](#) [ABLJO-V-122.880MHZ](#) [ABLJO-V-150.000MHZ](#) [ABLJO-V-155.520MHZ](#) [ABLJO-V-160.000MHZ](#)
[ABLJO-V-200.000MHZ](#) [ABLJO-V-200.000MHZ-T](#) [ABLNO-V-100.000MHZ](#) [ABLNO-V-100.000MHZ-T2](#) [ABLNO-V-120.000MHZ-T2](#)
[ABLNO-V-122.880MHz](#) [ABLNO-V-125.000MHz](#) [ABLNO-V-156.250MHz](#) [ABLNO-V-96.000MHz](#) [ABLNO-V-96.000MHz-T2](#) [ABLNO-V-](#)
[104.000MHz](#) [ABLNO-V-125.000MHz-T2](#) [ASG2-D-V-A-1000.000MHz](#) [ASG2-D-V-B-644.53125MHz](#) [ASG2-P-V-A-1000.000MHz](#)