

MULTI-CURRENT SWITCHING AND DIMMING

Switch-Hitter™

Constant Current LED Driver


**Model Number
AC-75CD700UV-QS**

Input Voltage: 120-277V
Input Frequency: 50/60Hz
Side Mount/Leads

ELECTRICAL SPECIFICATIONS:

Output Power Max.	Input Power	Input Current	Minimum PF (full load)	Max. THD (full load)	Output Voltage	Output Current	T case Max.	Minimum Starting Temp.	Efficiency Up To	Dimming Protocol	Dimming Range	IP Rating
37W	43W	0.36A @ 120V 0.15A @ 277V	>0.90	<20%	85-107V	350mA±5%	90° C	-40° C	85%	0 to 10V	10 to 100%	66
43W	50W	0.41A @ 120V 0.18A @ 277V	>0.90	<20%	85-107V	410mA±5%	90° C	-40° C	86%	0 to 10V	10 to 100%	66
56W	63W	0.52A @ 120V 0.22A @ 277V	>0.90	<20%	85-107V	530mA±5%	90° C	-40° C	88%	0 to 10V	10 to 100%	66
75W	83W	0.68A @ 120V 0.3A @ 277V	>0.90	<20%	85-107V	700mA±5%	90° C	-40° C	90%	0 to 10V	10 to 100%	66


WIRING:

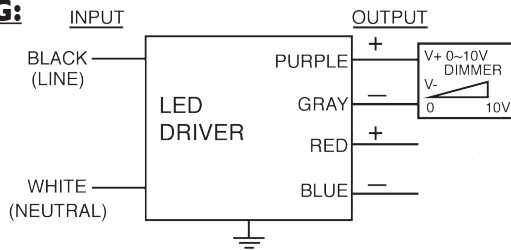

Lead Lengths

Black	5.9"	Blue	5.9"	Purple	5.9"
White	5.9"	Red	5.9"	Gray	5.9"

PHYSICAL:

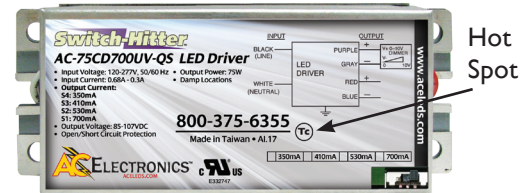

Dimensions

Length	7.80"	Mounting Length	7.32"
Width	3.11"	Weight	1.54 lbs.
Height	1.38"	Case Qty.	20 pcs.

SAFETY & PERFORMANCE:

- UL and cUL Recognized
- UL Outdoor Type I
- Class A sound rating
- No PCBs
- Overload Protection
- Open/Short Circuit Protection
- LED driver has a life expectancy of 50,000 hours at Tcase of ≤75°C
- LED driver has a life expectancy of 100,000 hours at Tcase of ≤65°C
- Warranty: 5 yrs based on max case temp of <75°C; 3 yrs based on max case temp of 90°C*
- Input/Output Isolation
- FCC Title 47 CFR Part 15
- Surge Protection (2 KV)

INSTALLATION:

- LED drivers shall be installed inside electrical enclosures
- 18 AWG 600V/105C tinned strand copper lead-wires are required for installation
- Max Remote installation distance is 18 ft
- LED driver cases should be grounded



*AC Electronics/AC LED Power Designs warrants to the purchaser that each LED Driver will be free from defects in material or workmanship for a period of 5 years when operated at max case temp of up to <75°C; 3 years from date of manufacture when operated at a max case temp of up to 90°C when properly installed and under normal conditions of use. See aceleds.com for complete warranty policy.



3401 Avenue D, Arlington, TX 76011 • 800-375-6355 • www.aceleds.com

Data is based upon tests performed by AC Electronics in a controlled environment and representative performance. Actual performance can vary depending on operating conditions. Specifications are subject to change without notice. All specifications are nominal unless otherwise noted.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [ac electronics](#) manufacturer:

Other Similar products are found below :

[AC Electronics](#)