
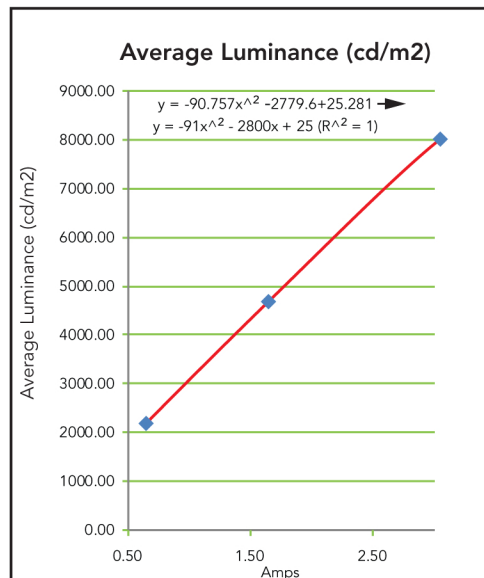
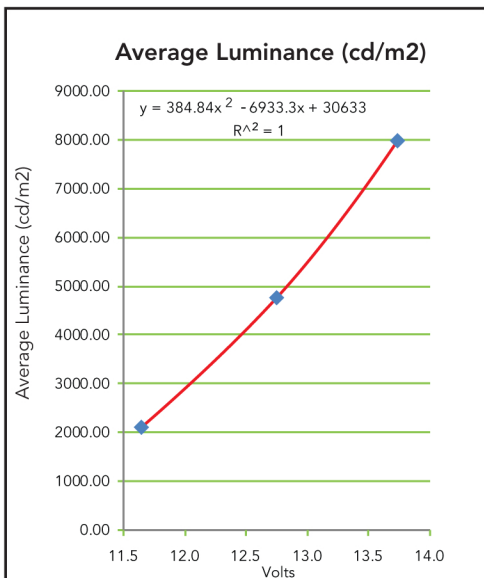
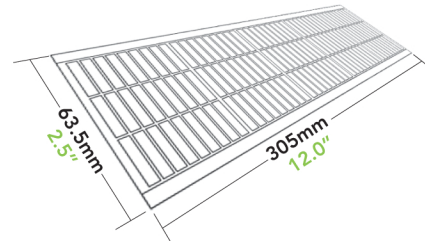



Input Voltage Max.	12 VDC
Current (A)	.450
Power (W)	5.4
Dimmable	Yes
Efficacy (lm/W)	40.0
Test Size (W) x (L)	63.5mm. x 305mm. / 2.5" x 12"
Thickness	.045cm. ± .017 / 0177in. ± .007
Operating Temperature	-40 ~ 80°C / -40 ~ 176°F
Color Temp. (CCT)	5800K <i>avg.</i>
Color Accuracy (CRI)	76 <i>avg.</i>
Weight per Ft. Gram / Oz.	6.8g / .24oz.
Lumens per Gram / Oz.	0.17 lpg / .006 lpoz.
Lumens per Meter / Foot	131 / 40.0
Surface Brightness (cd/M ²)	~5300

Nth-Light SL16-1018

- Exceptional Light Uniformity
- Low Glare & Shadowing
- Flexible
- Low Profile, Thin as .006"
- Lightweight
- Impact Resistant
- Cleanable Surface
- Low Power Consumption
- Easily Installed

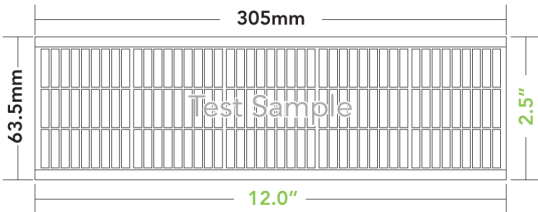

◆ Average Current (A) — Poly. (Average Current (A))

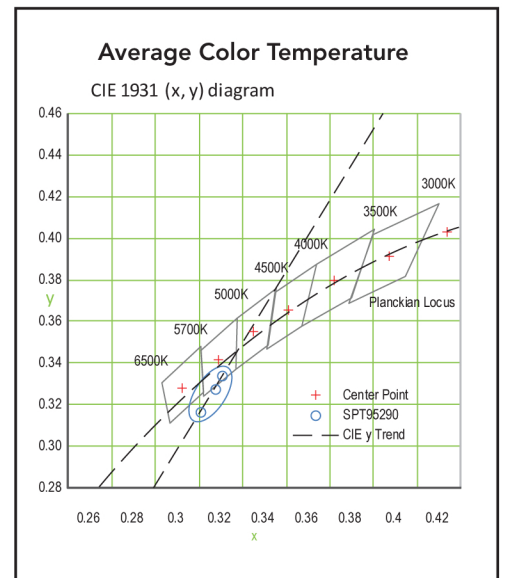

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Adafruit Accessories](#) category:

Click to view products by [Adafruit](#) manufacturer:

Other Similar products are found below :

[3209](#) [3561](#) [3560](#) [3562](#) [2503](#) [3011](#) [3048](#) [2973](#) [2868](#) [2958](#) [2836](#) [2968](#) [3610](#) [3568](#) [3551](#) [2858](#) [3353](#) [3584](#) [3484](#) [2865](#) [3556](#) [3559](#) [3262](#)
[3348](#) [2499](#) [2878](#) [2963](#) [3219](#) [3005](#) [2882](#) [PGM1202](#) [02-LDR1](#) [02-LDR12](#) [02-LDR13](#) [02-LDR14](#) [02-LDR15](#) [02-LDR2](#) [02-LDR3](#) [02-LDR4](#)
[2194](#) [862](#) [460](#) [905](#) [02-LDR20](#) [02-LDR21](#) [02-LDR22](#) [02-LDR23](#) [1008](#) [1020](#) [1031](#)