


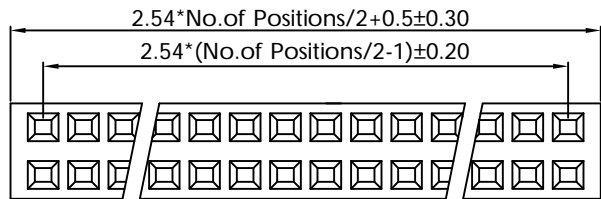


環保物料專用

RoHS compliant

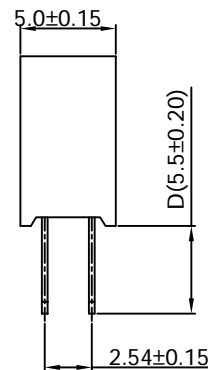

P.C.B. Hole Layout

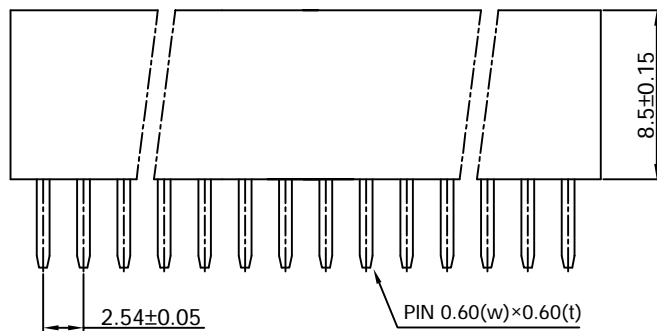

SPECIFICATIONS

- Current Rating :3 Amp
  - Insulator Resistance :5000 Megohms Min.
  - Contact Resistance :20 m ohms max.
  - Dielectric Withstanding :AC 1000 V
  - Operating Temperature :-40°C ~ +105°C
  - Contact Material :Phosphor Bronze
  - Insulator Material :Polyester, UL 94V-0
  - Standard :P.B.T
  - Finish :Tin, Gold or Duplex Plated
  - Standard :Gold Flash all over
- Note:  
Duplex plating: Gold Plated on contact area, Tin on Solder area

Ordering Information

F201-SGP-D055-XX



DESCRIPTION(內容):  
2.54mm Female Header 180°

DRAWN(製圖):  
*Tom Liu*

CHECKED(確認):  
*Jack Wu*


APPROVAL(核准):  
*Kane He*

GENERAL TOLERANCE		REV: A/1	REV	DESCRIPTION	DATE
LINEAR	ANGLES				
X.: ±0.30	X°: ±5.0°	UNIT: mm	1	ORIGINAL	Aug-04-2018
X.X: ±0.20	X.X°: ±3.0°		2	Modify Terminal SPEC	OCT-25-2018
X.XX: ±0.15	X.XX°: ±2.0°	SHEET: 1/1	3		
X.XXX: ±0.10	X.XXX°: ±1.0°		4		

PART NO:  
(料號) F201-SGP-D055-XX  
DWG NO (圖號): KWRD180804-015

A4

SCALE (比例):  
1:XX



A

B

C

D

E

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Adafruit Accessories](#) category:*

*Click to view products by [Adafruit](#) manufacturer:*

Other Similar products are found below :

[3209](#) [3561](#) [3560](#) [3562](#) [2503](#) [3011](#) [3048](#) [2973](#) [2868](#) [2958](#) [2836](#) [2968](#) [3610](#) [3568](#) [3551](#) [2858](#) [3353](#) [3584](#) [3484](#) [2865](#) [3556](#) [3559](#) [3262](#)  
[3348](#) [2499](#) [2878](#) [2963](#) [3219](#) [3005](#) [2882](#) [PGM1202](#) [02-LDR1](#) [02-LDR12](#) [02-LDR13](#) [02-LDR14](#) [02-LDR15](#) [02-LDR2](#) [02-LDR3](#) [02-LDR4](#)  
[2194](#) [862](#) [460](#) [905](#) [02-LDR20](#) [02-LDR21](#) [02-LDR22](#) [02-LDR23](#) [1008](#) [1020](#) [1031](#)