


NOTES:

1. PIN ASSIGNMENT SEE TO WIRE LIST.
2. ELECTRICAL TEST CONDITION:
  - (a). 100% OPEN, SHORT & MISWIRE TEST,
  - (b). INSULATOR RESISTANCE: 10 Mohm MIN.  
DC 300V 0.01sec.
  - (c). CONTACT RESISTANCE: 3ohm MAX.

PIN ASSIGNMENT

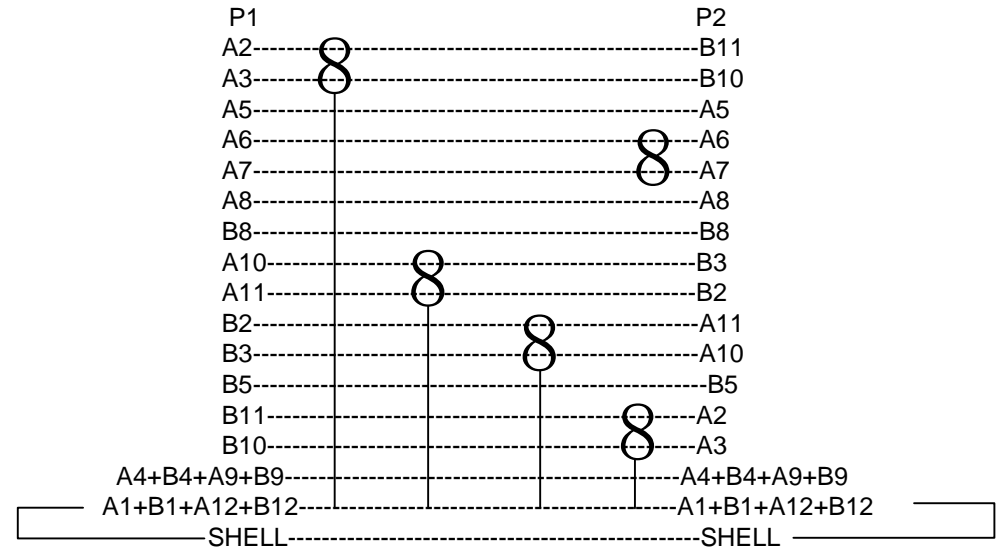

4	OVERMOLD BLACK PVC 45P MA-001.	
3	USB3.1 C TYPE MALE BLACK INSULATOR SOLDER TYPE.	
2	USB3.1 C TYPE(3.1C-G4-C1) MALE BLACK INSULATOR SOLDER TYPE.	
1	(32AWG*1C+EAM)*4+32AWG*1P+32AWG*4C+2EAB(85%) OD:4.8MM L:300mm BLACK PVC JACKET UL2725.	
NO.	Description	P/N

DWG NO:	PCM-00130	GOODS CODE		Draw		Date	2019/2/22
ITEM NO.	P4199A	DRAWING EVIDENCE		Check		Date	
Goods NO.	C13165-002 - A			Approval	L.Fried	Date	
Original NO.		Unit(mm)					

PREMIER CABLE MFG CO LTD

D		
C		
B	CHANGE PIN OUT	2019/7/18
VER.A	REVISE	Date.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Adafruit Accessories](#) category:*

*Click to view products by [Adafruit](#) manufacturer:*

Other Similar products are found below :

[3209](#) [3561](#) [3560](#) [3562](#) [2503](#) [3011](#) [3048](#) [2973](#) [2868](#) [2958](#) [2836](#) [2968](#) [3610](#) [3568](#) [3551](#) [2858](#) [3353](#) [3584](#) [3484](#) [2865](#) [3556](#) [3559](#) [3262](#)  
[3348](#) [2499](#) [2878](#) [2963](#) [3219](#) [3005](#) [2882](#) [PGM1202](#) [02-LDR1](#) [02-LDR12](#) [02-LDR13](#) [02-LDR14](#) [02-LDR15](#) [02-LDR2](#) [02-LDR3](#) [02-LDR4](#)  
[2194](#) [862](#) [460](#) [905](#) [02-LDR20](#) [02-LDR21](#) [02-LDR22](#) [02-LDR23](#) [1008](#) [1020](#) [1031](#)