





環保物料專用  
RoHS compliant

SPECIFICATIONS

Current rating :1A AC,DC  
 Voltage rating :50V AC,DC  
 Temperature range :-25°C ~ +85°C  
 Contact resistance :20mΩMax  
 Insulation resistance :100MΩMin  
 Withstanding voltage :500V AC/minute  
 Pin Material :Phosphor Bronze  
 Finished :Tin-plated  
 Housing Material :Nylon-6T,UL94 V-0  
 Color :Black

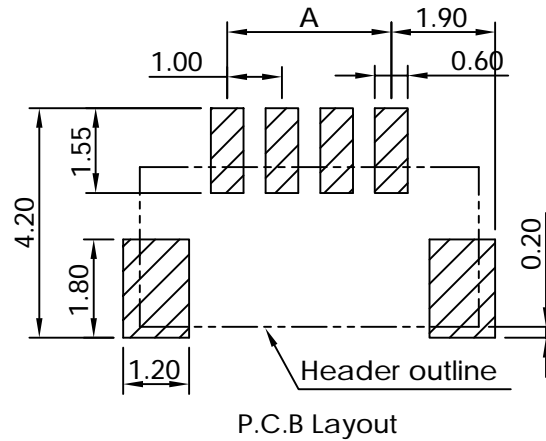

Circuits	Dimensions	
	A	B
02	1.00	4.00
03	2.00	5.00
04	3.00	6.00
05	4.00	7.00
06	5.00	8.00
07	6.00	9.00
08	7.00	10.00
09	8.00	11.00
10	9.00	12.00
11	10.00	13.00
12	11.00	14.00
13	12.00	15.00
14	13.00	16.00
15	14.00	17.00
16	15.00	18.00
17	16.00	19.00
18	17.00	20.00
19	18.00	21.00
20	19.00	22.00

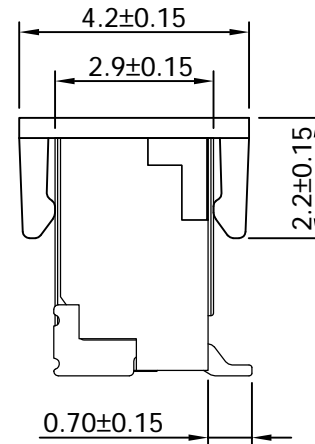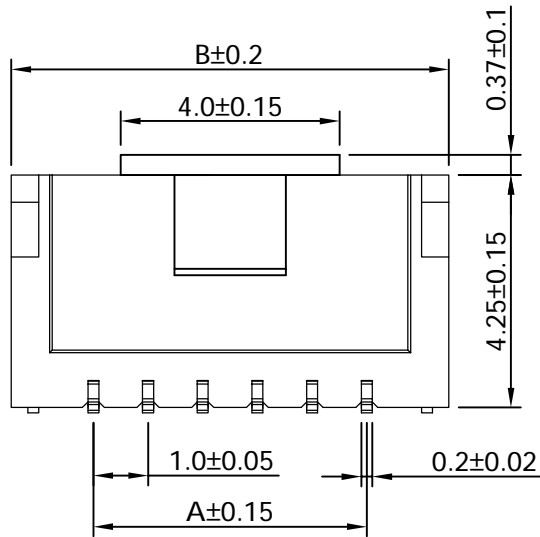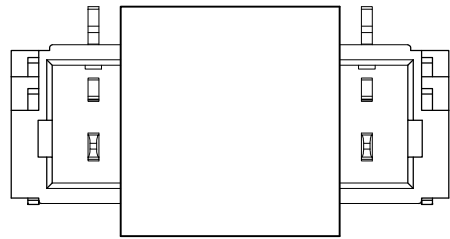

DESCRIPTION(內容):  
1.00MM WAFER 180° SMT TYPE  
REEL+CAP

DRAWN(製圖):  
**Tom Liu**  
CHECKED(確認):  
**Jack Wu**


GENERAL TOLERANCE		REV: A/1	REV	DESCRIPTION	DATE
LINEAR	ANGLES				
X.: ±0.30	X°: ±5.0°	UNIT: mm	1	ORIGINAL	Jul-26-2019
X.X: ±0.20	X.X°: ±3.0°				
X.XX: ±0.15	X.XX°: ±2.0°	SHEET: 1/1	3		
X.XXX: ±0.10	X.XXX°: ±1.0°				

PART NO:  
(料號) CESH-W10-XX-BK-RC  
DWG NO(圖號): KWRD190726-018

APPROVAL(核准):  
**Kane He**

A4

SCALE(比例):  
1:XX



A

B

C

D

E

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Adafruit Accessories](#) category:*

*Click to view products by [Adafruit](#) manufacturer:*

Other Similar products are found below :

[3209](#) [3561](#) [3560](#) [3562](#) [2503](#) [3011](#) [3048](#) [2973](#) [2868](#) [2958](#) [2836](#) [2968](#) [3610](#) [3568](#) [3551](#) [2858](#) [3353](#) [3584](#) [3484](#) [2865](#) [3556](#) [3559](#) [3262](#)  
[3348](#) [2499](#) [2878](#) [2963](#) [3219](#) [3005](#) [2882](#) [PGM1202](#) [02-LDR1](#) [02-LDR12](#) [02-LDR13](#) [02-LDR14](#) [02-LDR15](#) [02-LDR2](#) [02-LDR3](#) [02-LDR4](#)  
[2194](#) [862](#) [460](#) [905](#) [02-LDR20](#) [02-LDR21](#) [02-LDR22](#) [02-LDR23](#) [1008](#) [1020](#) [1031](#)