
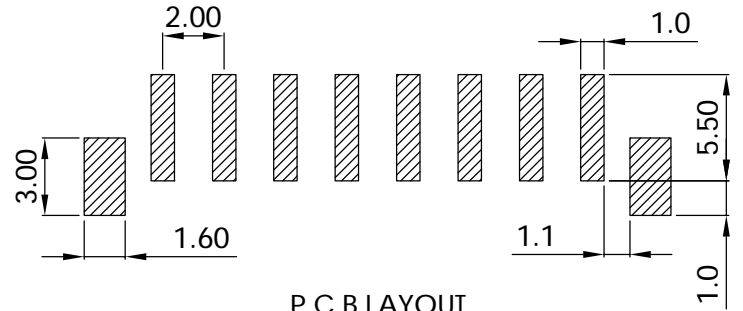
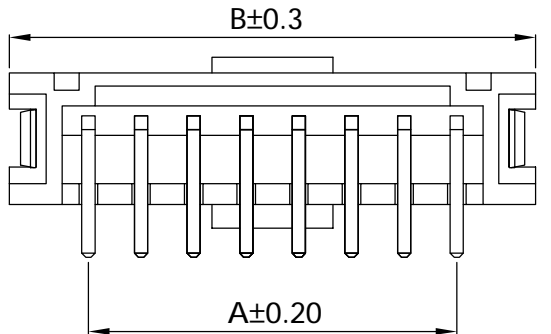
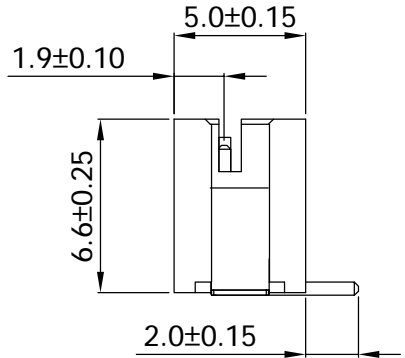
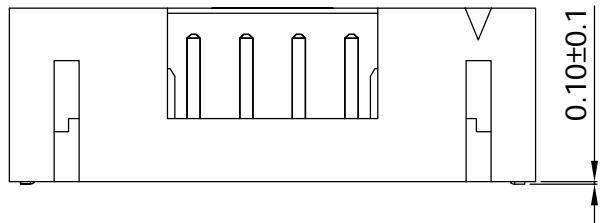


環保物料專用  
RoHS compliant

SPECIFICATIONS

Current Rating :2A AC,DC  
 Voltage rating :100V AC,DC  
 Temperature range :−25°C~+85°C  
 Contact resistance :20mΩMax  
 Insulation resistance :1000MΩMin  
 Withstanding voltage :800 V AC/minute  
 Pin Material :Brass  
 Finished :Tin-plated  
 Housing Mateial :Nylon-6T,UL94 V -0  
 Color :Black

Circuits	Dimension mm	
	A	B
02	2.00	8.00
03	4.00	10.00
04	6.00	12.00
05	8.00	14.00
06	10.00	16.00
07	12.00	18.00
08	14.00	20.00
09	16.00	22.00
10	18.00	24.00
11	20.00	26.00
12	22.00	28.00
13	24.00	30.00
14	26.00	32.00
15	28.00	34.00
16	30.00	36.00

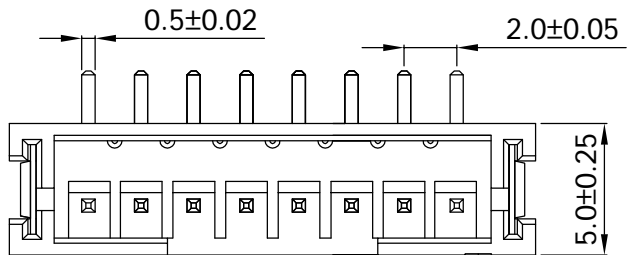

**KAWEEI TECHNOLOGY**

**A4** SCALE(比例): 1:XX

THIRD ANGLE PROJECTION

DESCRIPTION(內容):  
2.0mm Wafer 180° SMT

PART NO:  
(料 號) CCP-W20-XX-BK-SMT-R-A

DWG NO(圖號): KWRD190816-008

DRAWN(製圖):  
*Tom Liu*

CHECKED(確認):  
*Jack Wu*

APPROVAL(核准):  
*Kane He*

GENERAL TOLERANCE		REV: A/1	REV	DESCRIPTION	DATE
LINEAR	ANGLES				
X.: ±0.30	X°: ±5.0°	UNIT: mm	1	ORIGINAL	Aug-16-2019
X.X: ±0.20	X.X°: ±3.0°		2		
X.XX: ±0.15	X.XX°: ±2.0°	SHEET: 1/1	3		
X.XXX: ±0.10	X.XXX°: ±1.0°		4		

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Adafruit Accessories](#) category:*

*Click to view products by [Adafruit](#) manufacturer:*

Other Similar products are found below :

[3209](#) [3561](#) [3560](#) [3562](#) [2503](#) [3011](#) [3048](#) [2973](#) [2868](#) [2958](#) [2836](#) [2968](#) [3610](#) [3568](#) [3551](#) [2858](#) [3353](#) [3584](#) [3484](#) [2865](#) [3556](#) [3559](#) [3262](#)  
[3348](#) [2499](#) [2878](#) [2963](#) [3219](#) [3005](#) [2882](#) [PGM1202](#) [02-LDR1](#) [02-LDR12](#) [02-LDR13](#) [02-LDR14](#) [02-LDR15](#) [02-LDR2](#) [02-LDR3](#) [02-LDR4](#)  
[2194](#) [862](#) [460](#) [905](#) [02-LDR20](#) [02-LDR21](#) [02-LDR22](#) [02-LDR23](#) [1008](#) [1020](#) [1031](#)