


parameter table:

Num	Category	Describe
1	Max Current	0.8A
2	Cable gauge (AWG)	14-26 AWG
3	IDC Pitch:	Pitch:2.54mm
4	PCB Material	FR4
5	IDC Withstanding voltage	300V AC/MINUTE
6	IDC Operating temperature	-20°C to 105°C
7	Rated voltage according to	UL:XXXXXX
8	Rated current according to	UL:XXXXXX
9	IDC Material:	INSULATOR:PBT 30%GF; CONTACT:COPPER ALLOY
10	Box size w/label	
11	Packing	

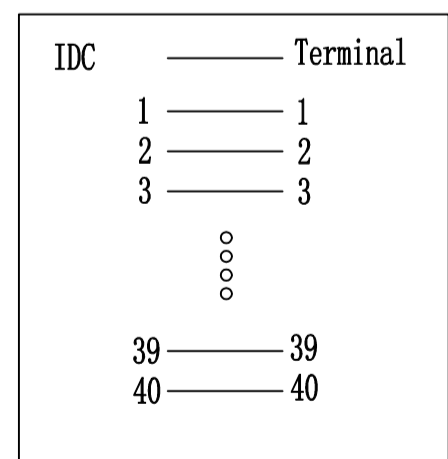

Pin assignment

制作	Hero. Xu	日期	2019. 11. 15	名称	端子台	型号	IDC40P-B
审核				版本	Ver:1.0	客户编号	
核准				摄影角度	图纸比例	第 1 张 共 1 张	
未注线性公差GB1804-m级 (单位mm)				角度公差	±0.5°	中山市肯博电子科技有限公司 www.kingpow.cn	
尺寸	≤3	3-6	6-30	30-120	120-400	400-1000	1000-2000
公差	0.1	0.15	0.2	0.3	0.5	0.8	1.2
						2000-4000	2.0

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [DIN Rail Terminal Blocks](#) category:*

*Click to view products by [Adafruit](#) manufacturer:*

Other Similar products are found below :

[00110420202](#) [8WA1011-1BH23](#) [8WA1011-1EF20](#) [8WA1011-6DG11](#) [91.010](#) [9102100000](#) [91.040](#) [9123140000](#) [9123140001](#) [RBO 5-T-B-HEX](#) [1333564](#) [DP25-GY-ND](#) [1431306](#) [1433306](#) [90.070](#) [90.202](#) [91.020](#) [912314](#) [260-301\\_NR](#) [2757571](#) [280-331](#) [280-560](#) [280-564](#) [281-611/281-542](#) [281-673/281-411](#) [281-994](#) [283-317](#) [283-607](#) [2909798](#) [264-724](#) [264-726](#) [280-530](#) [280-555](#) [280-619](#) [281-610](#) [281-622/281-417](#) [284-317](#) [284-601](#) [2907033](#) [3048496](#) [5542152](#) [35956](#) [USK 10](#) [102510](#) [1025100000](#) [5520682](#) [5607102](#) [EMH 25-ZE30](#) [591620-2](#) [UM 45-SEFE M.NUT BK](#)