

Printview: COMPACT splicing connectors for all wire types; 5-conductor terminal block; with operating levers; Max. operating temperature 85°C - Item No.: 221-415

WAGO® online catalog / eShop

COMPACT splicing connectors for all wire types; 5-conductor terminal block; with operating levers; Max. operating temperature 85°C

Item No.: 221-415



COMPACT splicing connectors for all wire types; 5-conductor terminal block; with operating levers; Max. operating temperature 85°C

Marking

RoHS ✓
Compliant

Business data

| | |
|----------------------|---------------|
| Supplier | WAGO |
| Item no. | 221-415 |
| GTIN / EAN | 4055143234658 |
| Content | 1 |
| Order amount | 25 |
| Customer item number | |

Notes

Technical data

Miscellaneous

| | |
|-----------------------------------|-------------|
| Total number of connection points | 5 |
| Total number of potentials | 1 |
| Color | transparent |
| Ratings according to 1 | EN 60664 |
| Pollution degree (1) | 2 |
| Rated voltage EN (1) [V] | 450 [V] |
| Rated surge voltage (1) [kV] | 4 [kV] |
| Nominal current [A] | 32 [A] |

Printview: COMPACT splicing connectors for all wire types; 5-conductor terminal block; with operating levers; Max. operating temperature 85°C - Item No.: 221-415


| Technical data | |
|--------------------------------------|--|
| <i>Connection technology (1)</i> | <i>CAGE CLAMP®</i> |
| <i>Nominal cross section 1</i> | <i>4 mm²</i> |
| <i>Solid sizes 1</i> | <i>0.2 ... 4 mm² / 24 ... 12 AWG</i> |
| <i>stranded, connectable 1</i> | <i>0.2 ... 4 mm² / 24 ... 12 AWG</i> |
| <i>Fine-stranded wires 1</i> | <i>0.14 ... 4 mm² / 24 ... 12 AWG</i> |
| <i>Strip length 1</i> | <i>11 mm / 0.43 in</i> |
| <i>Type of wiring</i> | <i>Side-entry wiring</i> |
| <i>Flammability rating per UL 94</i> | <i>V2</i> |
| <i>Fire load [MJ]</i> | <i>0.076 [MJ]</i> |
| <i>Weight [g]</i> | <i>4.048 [g]</i> |
| <i>Width</i> | <i>29.9 mm / 1.177 in</i> |
| <i>Height</i> | <i>8.3 mm / 0.327 in</i> |
| <i>Length</i> | <i>18.6 mm / 0.732 in</i> |
| <i>Safety information 1</i> | <i>In grounded power lines</i> |

| Approbation | | | | | |
|--------------------|--------------|-------------------|-------------|-------------|---------------------------------------|
| Item No. | Registration | Registration no. | Voltage [V] | Current [A] | Cross section [mm ² , AWG] |
| <i>221-415</i> | <i>CCA</i> | <i>2168803.01</i> | <i>450</i> | <i>32</i> | <i>0.20-4.00</i> |

Printview: COMPACT splicing connectors for all wire types; 5-conductor terminal block; with operating levers; Max. operating temperature 85°C - Item No.: 221-415

Images & drawings



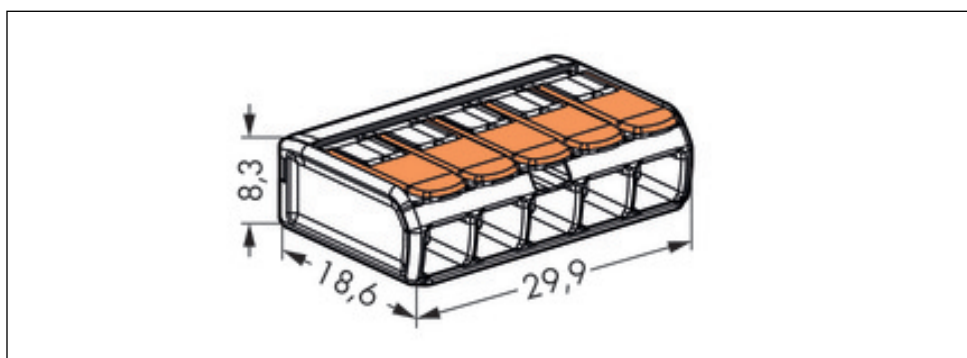

Address

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Telefon: 0571/887-0

Fax: 0571/887-169

<http://www.wago.com>

© WAGO Kontakttechnik GmbH & Co. KG

Technische Änderungen und Irrtümer vorbehalten.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Adafruit Accessories](#) category:

Click to view products by [Adafruit](#) manufacturer:

Other Similar products are found below :

[3209](#) [3561](#) [3560](#) [3562](#) [2503](#) [3011](#) [3048](#) [2973](#) [2868](#) [2958](#) [2836](#) [2968](#) [3610](#) [3568](#) [3551](#) [2858](#) [3353](#) [3584](#) [3484](#) [2865](#) [3556](#) [3559](#) [3262](#)
[3348](#) [2499](#) [2878](#) [2963](#) [3219](#) [3005](#) [2882](#) [PGM1202](#) [02-LDR1](#) [02-LDR12](#) [02-LDR13](#) [02-LDR14](#) [02-LDR15](#) [02-LDR2](#) [02-LDR3](#) [02-LDR4](#)
[2194](#) [862](#) [460](#) [905](#) [02-LDR20](#) [02-LDR21](#) [02-LDR22](#) [02-LDR23](#) [1008](#) [1020](#) [1031](#)