


CM-920

Extreme Rugged™ PCI/104-Express Single Board Computer with 3rd Generation Intel® Core™ Processor

Features

- Dual-core 3rd Generation Intel® Core™ Processor
- Up to 4GB industrial grade soldered-down ECC 1600MHz DDR3 memory
- 8GB industrial grade solid state drive (SSD)
- One PCIe x16 (Gen 3) and 1 x4 or 4 x1 (Gen 2)
- Two SATA 6 Gb/s ports, two Gigabit Ethernet, four USB 2.0 interfaces, and two serial ports
- PCI/104-Express Type 1 and PCI/104 expansion interfaces
- Extreme Rugged™ operating temperature: 40°C to +85°C
- 50% thicker PCB for high vibration environments

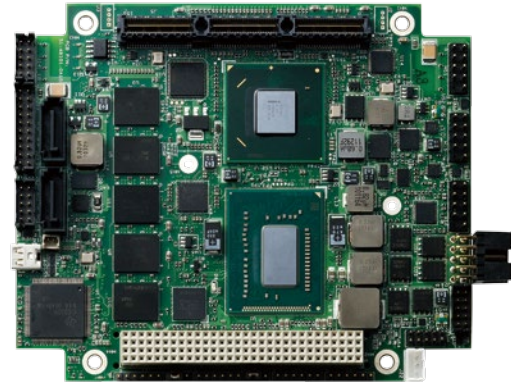

Specifications

• Core System

CPU

Intel® Core™ i7-3517UE 1.7GHz (up to 2.8GHz Turbo), 4MB L3 cache, 17W, dual core

Intel® Celeron® 807UE 1.0GHz, 1MB L3 cache, 10W, single core

Memory

2 or 4GB single channel industrial grade solder down ECC 1600 MHz DDR3 memory

Embedded BIOS

AMI UEFI with CMOS backup in 16 MB SPI flash

Hardware Monitor

Supply voltages and CPU temperature

Watchdog Timer

Programmable timer range to generate RESET

Technologies

PAVP 3.0, Intel® AMT 8.0, Intel® VT, Intel AES-NI, Intel® HT, Intel® HD Graphics with Dynamic Frequency, Intel® Turbo Boost, Dynamic Turbo, Intel® AVX 1.0, Intel® Quick Sync Video

Expansion Busses

PCI/104 (32-bit 33/66MHz)

PCI/104-Express Type 1 with 1 of PCI Express x16 (Gen3) bus SMBus (system)
2 of USB 2.0, 4 of PCI Express x1

• Ethernet

10/100/1000Mbps

2x GbE: 1x PCH using Intel® 82579 PHY, 1x Intel® 82574 MAC/PHY

• Video

Integrated Graphics

HD Graphics 4000 at 350-1000 MHz

Integrated Video

DirectX 11.0, OpenGL 3.1, and OCL 1.1

Media Processing

Decode (HW JPEG & MJPEG decode), encode (full HW MPEG2 encode), transcode Intel® Clear Video HD Technology + enhanced media processing

VGA Interface

Analog VGA support with 300 MHz DAC, Analog monitor support up to QXGA (2048 x 1536) and VGA hot plug

LVDS Interface

Dual-channel 18/24-bit LVDS

Digital Display Interface

One DVI

• Power

Standard Input

5V (3.3V and 12V if required by the PCI/104-Express stack)

Power States

Supports S1, S4

Power Consumption

9W typical

• Audio Chipset

Integrated on Mobile Intel® QM67 Express Chipset, available on HDMI port

Specifications

- **I/O Interfaces**

Chipset

Integrated on Mobile Intel® QM67 Express Chipset

USB

Four USB 2.0 ports (plus two to the PCI/104-Express stack)

SATA

Two SATA 6 Gb/s with support for RAID 0,1

Storage

Onboard 8GB industrial grade SSD

Serial

Two RS-232 Serial ports implemented in LPC based Super I/O

- **Operation System**

Standard Support

Windows 7, Linux

Extended Support (BSP)

WES 7, WES 2009, WEC 7, VxWorks 6.9, QNX 6.5

- **Mechanical and Environmental**

Form Factor

PCI/104 Express

Dimension

116mm x 96mm

Operating Temperature

Standard: -20°C to +70°C

Extreme Rugged™: -40°C to +85°C (CPU throttling at 800MHz, no throttling to +75°C)

Storage Temperature

-55°C to +85°C

Humidity

90% at 60°C non-condensing

Shock and Vibration

50G peak-to-peak, 11ms duration, MIL-STD-202G Method 213B

Operating: 11.96 Grms, 50-2,000 Hz, each axis, MIL-STD-202G Method 214A

HALT

Thermal Stress, Vibration Stress, Thermal Shock and Combined Test

- **Intelligent Middleware**

SEMA®



Local management, control of embedded computer systems

Extended EAPI for monitoring, controlling and analytics applications

Multiple OS support and across platforms (x86, ARM)

Ordering Information

- **CM-920-R-10**
PCI-104™ with Intel® Celeron® 807UE 1.0GHz, 10W, 2GB solder down DDR3 1600 memory, 8GB SSD, 18/24 bit LVDS, VGA, HDMI, SATA, PCI
- **CM-920-R-17**
PCI/104-Express with Intel® Core™ i7-3517UE 1.7GHz, 17W, 2GB solder down DDR3 1600 memory, 8GB SSD, 18/24 bit LVDS, VGA, HDMI, SATA, PCI Express, PCI
- **CM-920-R-18**
PCI/104-Express with Intel® Core™ i7-3517UE 1.7GHz, 17W, 4GB solder down DDR3 1600 memory, 8GB SSD, 18/24 bit LVDS, VGA, HDMI, SATA, PCI Express, PCI
- **CM-920-L-10**
CM-920 Quick Start Kit includes CM-920-R-10, cable kit, CM920-TM-CU. USB stick with BSP/drivers and manuals
- **CM-920-L-17**
CM-920 Quick Start Kit includes CM-920-R-17, cable kit, CM920-TM-CU. USB stick with BSP/drivers and manuals

*other configurations by request

Accessories

- **CM-920-X-01**
CM-920 cable kit (RoHS), Additional cables to be defined as required for extreme rugged pin headers
- **CM-920-TM-AL**
PCI/104-Express with Intel® Core™ i7-3517UE 1.7GHz, 17W, 2GB solder down DDR3 1600 memory, 8GB SSD, 18/24 bit LVDS, VGA, HDMI, SATA, PCI Express, PCI
- **CM-920-R-18**
CM-920 Aluminum Heatspreader
- **CM-920-TM-CU**
CM-920 Copper Heatsink
- **CM-920-TM-FAN**
CM-920 Aluminum/Copper Heatsink with Fan

Recommended Configurations

- **CM-920-R-10 (ETT), (CC)**
CM-920-R-10, -40°C to +85°C (optional), coating (optional)
- **CM-920-R-17 (ETT), (CC)**
CM-920-R-17, -40°C to +85°C (optional), coating (optional)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Single Board Computers](#) category:

Click to view products by [ADLINK Technology](#) manufacturer:

Other Similar products are found below :

[MANO882VPGGA-H81](#) [SSD3200W-S-SLC-INN 20-101-0738](#) [MVME61006E-2173R](#) [SHB230DGGA-RC](#) [CM2-BT2-E3825-ETT](#)
[IMB210VGGA](#) [IB915F-3955](#) [MI958F-16C](#) [S2600WFT](#) [S2600STB](#) [BBS2600BPS](#) [BLKNUC7I3DNHNC1978015](#) [DEV-17745](#)
[BEAGLEBOARD POCKET](#) [MICROSOM I2 + WIFI/BT](#) [HUMMINGBOARD-I2EX BASE + WIFI/BT](#) [HUMMINGBOARD-I4 PRO +](#)
[WIFI/BT](#) [VAB-600-B](#) [MITX-440-DVI-2E](#) [ATCA-7365-D-24GB](#) [NITX-315-DEVKIT](#) [A13-SOM-512](#) [NITX-315](#) [BANANA PI BPI-M1+](#)
[A13-SOM-WIFI-4GB](#) [AM3359-SOM-EVB-IND](#) [UPS-APLC2-A10-0432](#) [DFR0419](#) [UPS-APLP4-A10-0864](#) [UPS-APLP4-A10-0432](#) [UPS-](#)
[APLP4-A10-08128](#) [MI977F-Q27](#) [BBBLUE](#) [IB811F-I30](#) [DFR0470-ENT](#) [Nit6Q_i](#) [M2M \(TELIT\)](#) [RELAY](#) [PROFESSIONAL](#)
[GCS22.2.080.2.2.I](#) [GCS22.8.100.4.2.I](#) [GLS11.2.053.2.2.E](#) [A20-OLINUXINO-LIME-E16GS16M](#) [A20-OLINUXINO-LIME-S16M](#) [A20-](#)
[OLINUXINO-LIME2-E16GS16M](#) [A20-OLINUXINO-MICRO-S16M](#) [BANANA PI BPI-W2](#) [T2-OLINUXINO-LIME2-S16M-IND](#) [T2-](#)
[OLINUXINO-MICRO-E8GS16M-IND](#)