


# DIN-96DI-01

## 96-CH Isolated DI Terminal Board with DIN-Rail Mounting

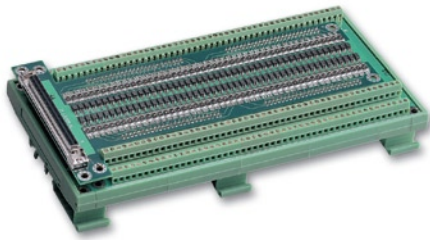

### Features

- 96-CH isolated digital inputs
- For use with PCI-7396
- Isolated input voltage up to 24 V
- 2500 V<sub>RMS</sub> optical isolation
- Screw terminals for easy field wiring

### Specifications

- Number of Channels: 96
- Maximum Input Range: 24 V
- Digital Logic Levels
  - 0 to 24 V non-polarity
    - ◆ Input high voltage: 10 V to 24 V
    - ◆ Input low voltage: 0 to 24 V
- Input Resistance: 4.7 kΩ @ 0.5 W
- Isolation Voltage: 2500 V<sub>RMS</sub>
- I/O Connector: 100-pin SCSI-II female
- Operating Temperature: 0°C to +60°C
- Storage Temperature: -20°C to +80°C
- Relative Humidity: 5% to 95%, non-condensing
- Power Consumption:

+5 V
48 mA maximum

- Dimensions: 226 mm x 121 mm x 48 mm (W x L x H)

### Ordering Information

#### ■ DIN-96DI-01

96-CH isolated DI terminal board with DIN-rail mounting


#### ■ Accessory

- Cabling  
ACL-102100-1: 100-pin SCSI-II cable, 1 M

Contact your sales representative for cable length options.

# DIN-96DO-01

## 96-CH Isolated DO Terminal Board with DIN-Rail Mounting

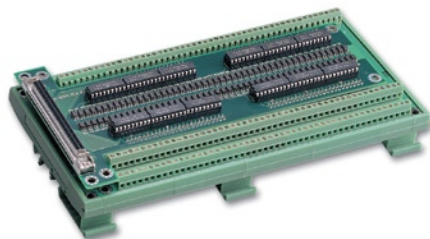

### Features

- 96-CH isolated digital outputs
- For use with PCI-7396
- Sink current up to 500 mA on each isolated output
- 2500 V<sub>RMS</sub> optical isolation
- Screw terminals for easy field wiring

### Specifications

- Number of Channels: 96
- Output Type: open collector Darlington transistor
- Sink Current
  - Max. 500 mA for only one Darlington pair
  - 500 mA for all Darlington pair @ 20% duty
- Power Dissipation: Max. 2.25 W per chip (8 DO channels)
- Supply Voltage: 5 V<sub>Dc</sub> to 35 V<sub>Dc</sub>
- Isolation Voltage: 2500 V<sub>RMS</sub>
- I/O Connector: 100-pin SCSI-II female
- Operating Temperature: 0°C to +60°C
- Storage Temperature: -20°C to +80°C
- Relative Humidity: 5% to 95%, non-condensing
- Power Consumption:

+5 V
102 mA maximum

- Dimensions: 226 mm x 121 mm x 48 mm (W x L x H)

### Ordering Information

#### ■ DIN-96DO-01

96-CH isolated DO terminal board with DIN-rail mounting

#### ■ Accessory

- Cabling  
ACL-102100-1: 100-pin SCSI-II cable, 1 M

Contact your sales representative for cable length options.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Terminal Block Interface Modules](#) category:*

*Click to view products by [ADLINK Technology](#) manufacturer:*

Other Similar products are found below :

[73-551-6002I](#) [GCN1MX25B](#) [DIN-50P-01](#) [DIN-68H-01](#) [DIN-96DI-01](#) [2291901](#) [2907794](#) [2M10FCL](#) [FLKM-2I/O](#) [FLKM-4I/O](#) [2281759](#)  
[2906251](#) [2907808](#) [5601749](#) [5541962](#) [1776613-1](#) [GCN1-004A](#) [ADAM-3920R-AE](#) [060-6827-06](#) [2311030](#) [2287708](#) [XW2C-20G6-IO16](#)  
[GCN1-T](#) [MACX](#) [MCR-VAC](#) [5775235](#) [ADAM-3956-BE](#) [XW6T-COM2.5X20YL](#) [XW6T-COM1.5X8BL](#) [XW6T-COM1.5X16BL](#) [XW6T-](#)  
[COM1.5X20YL](#) [XW6T-COM1.5X16YL](#) [XW6T-COM1.5X20RD](#) [XW6T-COM1.5X20BL](#) [XW6T-COM2.5X8BL](#) [1976610000](#) [UM 45-](#)  
[D50SUB/B/ZFKDS](#) [5541234](#) [410-261](#) [2906243](#) [2906915](#) [2907706](#) [ADAM-3909-AE](#) [ADAM-3920-AE](#) [ADAM-3925-AE](#) [ADAM-3937-BE](#)  
[ADAM-3950-AE](#) [ADAM-3951-BE](#) [ADAM-3968-AE](#) [ADAM-3968/50-AE](#) [2905026](#)