


HSL-DI16DO16-DB-NN
16-CH Discrete Input 16-CH
Discrete Output Daughter
Board Module



Specifications

- ◆ Slave ID consumption: 1
16-CH NPN sinking type sensor inputs or dry contact and 16-CH NPN sinking type outputs
- ◆ Photo couple isolation voltage: 2500Vrms
- ◆ Input impedance: 4.7K Ω
- ◆ Input current: $\pm 10\text{mA}$ (Max), $\pm 12.5\text{mA}$ (Peak)
- ◆ Input voltage: $\pm 40\text{V}$ (Max)
- ◆ Output switching capacity:
300mA/ch at 24V_{DC}
- ◆ Terminal Base:
HSL-TB64 or HSL-TB32-DIN
- ◆ LED indicator: Power, Link and I/O status
- ◆ Power supply: 10V to +30V_{DC}
- ◆ Operating temperature: 0 to 60°C
- ◆ Storage temperature: -20 to 80°C
- ◆ Power consumption: 1.8W

HSL-DI32-DB-N
32-CH Discrete Input Daughter
Board Module

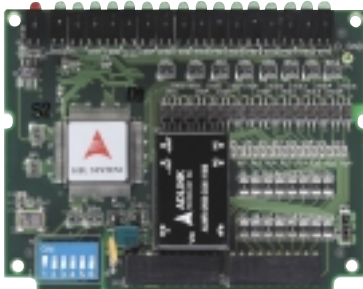

Specifications

- ◆ Slave ID consumption: 2
- N: for 32-CH NPN sinking type sensor inputs or dry contact
- ◆ Photo couple isolation voltage: 2500Vrms
- ◆ Input impedance: 4.7K Ω
- ◆ Input current: $\pm 10\text{mA}$ (Max), $\pm 12.5\text{mA}$ (Peak)
- ◆ Input voltage: $\pm 40\text{V}$ (Max)
- ◆ Terminal Base:
HSL-TB64 or HSL-TB32U-DIN
- ◆ LED indicator: Power, Link and I/O status
- ◆ Power supply: 10V to +30V_{DC}
- ◆ Operating temperature: 0 to 60°C
- ◆ Storage temperature: -20 to 80°C
- ◆ Power consumption: 1.8W

HSL-DO32-DB-N
32-CH Discrete Output Daughter
Board Module



Specifications

- ◆ Slave ID consumption: 2
- N: for 32-CH NPN sinking type outputs
- ◆ Photo couple isolation voltage: 2500Vrms
- ◆ Output switching capacity:
Single channel 500mA; all channels 60mA at 24V_{DC}
- ◆ Output response time:
ON \rightarrow OFF: 180 μs , OFF \rightarrow ON: 1.2 μs
- ◆ Terminal Base:
HSL-TB64 or HSL-TB32U-DIN
- ◆ LED indicator: Power, Link and I/O status
- ◆ Power supply: 10V to +30V_{DC}
- ◆ Operating temperature: 0 to 60°C
- ◆ Storage temperature: -20 to 80°C
- ◆ Power consumption: 1.8W

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [ADLINK Technology](#) manufacturer:

Other Similar products are found below :

[IFD8520](#) [cPCI-3544](#) [422CON](#) [ATX6022/14GP7](#) [ATX6022/8](#) [AX93221-24/48](#) [FC6A-EXM2](#) [OPT8AP-AE](#) [96RMKVM-19V1C-A](#) [60016-011](#) [60016-014](#) [60006-008](#) [60011-075](#) [HPCI-14S12U](#) [cBP-3208](#) [cBP-3062A](#) [FAB205-6P5](#) [ATX6022/6](#) [60016-012](#) [96RMKVM-17V1C-A](#) [PCE-DP10-00A1E](#) [MOS-1120Y-0201E](#) [96RMLCD-17V1-A](#) [96RMKVM-17V8C-A](#) [60004-005](#) [60016-017](#) [60006-009](#) [60016-035](#) [60016-034](#) [60016-031](#) [60016-030](#) [60016-026](#) [60016-024](#) [60016-018](#) [60016-007](#) [60016-005](#) [60007-002](#) [60006-010](#) [AXX10GBTWLHW3](#) [382-BBEH](#) [555-BDCL](#) [K6CMISZBI52](#) [426451401-3](#) [60011-093](#) [MIC-3620/3-BE](#) [MPCIE-UART-KIT02-R20](#) [RSM232](#) [PCIE-1680-AE](#) [BB-FOSTCDRI](#) [73-544-002](#)