


# PCI/LPCI/LPCle-7230, PCI-7233/7234

## 32-CH Isolated DIO Cards

**CompactPCI**

PCI EXPRESS® PCI EXPRESS®

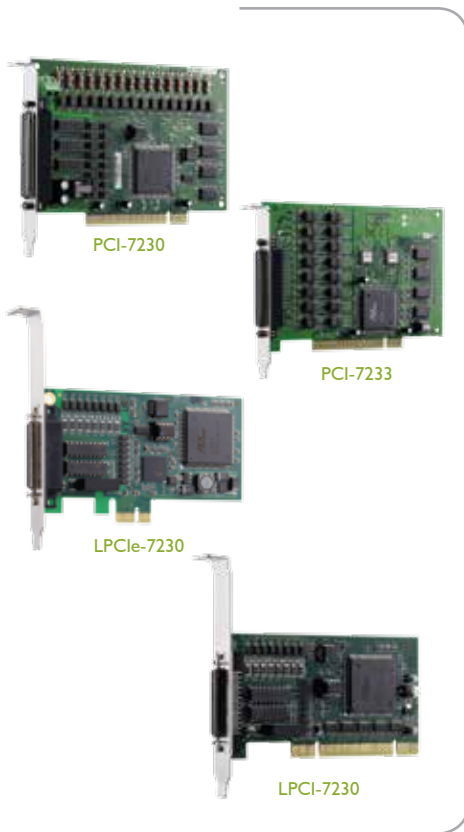

### Specifications

#### Isolated Digital Input

- Number of channels
  - 16 (PCI-7230/LPCI-7230/LPCle-7230)
  - 32 (PCI-7233)
- Maximum input range
  - 24 V, non-polarity
  - PCI-7230/PCI-7233/LPCI-7230/LPCle-7230
- Digital logic levels
  - 0-24 V, non-polarity
  - Input high voltage: 5-24 V
  - Input low voltage: 0-1.5 V
- Input resistance: 1.2 k @ 0.5 W
- Isolation voltage
  - 2500 V<sub>RMS</sub> (LPCI-7230/LPCle-7230)
  - 5000 V<sub>RMS</sub> (PCI-7230/PCI-7233)
- Interrupt sources
  - Digital input channel 0 and 1 (PCI-7230/LPCI-7230/LPCI-7230)
  - Change-of-state (PCI-7233)
- Data transfers: programmed I/O

#### Isolated Digital Output

- Number of channels
  - 16 (PCI-7230/LPCI-7230/LPCle-7230)
  - 32 (PCI-7234)
- Output type: Darlington transistor
- Sink current
  - 500 mA for one channel @ 100% duty (PCI-7230/LPCI-7230/LPCle-7230)
  - 370 mA for all channels @ 10% duty (PCI-7230/LPCI-7230/LPCle-7230)
  - 130 mA for all channels @ 50% duty (PCI-7230/LPCI-7230/LPCle-7230)
  - 500 mA for single channel @ 100% duty (PCI-7234)
  - 500 mA for all channels @ 20% duty (PCI-7234)
- Source current
  - 500 mA for one channel @ 100% duty cycle (PCI-7234P)
  - 260 mA for all channels @ 10% duty cycle (PCI-7234P)
- Power dissipation
  - Max. 1.47 W per chip (8 DO channels) (PCI-7230/PCI-7234P/LPCI-7230/LPCle-7230)
  - Max. 2.25 W per chip (8 DO channels) (PCI-7234)
- Supply voltage: 5-35 V<sub>DC</sub>
- Isolation voltage: 2500 V<sub>RMS</sub>
- Data transfers: programmed I/O

#### General Specifications

- I/O connector
  - PCI-7230/7233/7234/7234P
    - 37-pin D-sub female
  - PCI-7230/LPCI-7230
    - One 50-pin SCSI-II female
- Operating temperature: 0°C to 60°C (32°F to 140°F)
- Storage temperature: -20°C to 80°C (-4°F to 176°F)
- Relative humidity: 5% to 95%, non-condensing

#### Power requirements

Device	Power Consumption
PCI-7230	+5 V @ 150 mA typical (needs external DC power)
PCI-7233	+5 V @ 300 mA typical
PCI-7234	+5 V @ 180 mA typical (with internal DC-DC power)
PCI-7234P	+5 V @ 150 mA typical
LPCI-7230	+3.3 V @ 279 mA
LPCle-7230	+12 V @ 133 mA

#### Dimensions (not including connectors)

- 153 mm X 107 mm (5.96" x 4.17") (PCI-7230)
- 158 mm X 107 mm (6.16" x 4.17") (PCI-7233)
- 175 mm X 107 mm (6.82" x 4.17") (PCI-7234 & PCI-7234P)
- 120 mm X 65 mm (4.68" x 2.53") (LPCI-7230)
- 119.9 mm x 68.9 mm (4.67" x 2.68") (LPCle-7230)

### Terminal Boards & Cables

#### PCI-7230/7233/7234/7234P:

##### ■ DIN-37D-01

Terminal Board with One 37-pin D-sub Connector and DIN-Rail Mounting (Cables are not included.)

##### ■ ACLD-9137-01

General-Purpose Terminal Board with One 37-pin D-sub Male Connector

##### ■ ACL-10137-1MM

37-pin D-sub male/male cable, 1 M

#### LPCI-7230/LPCle-7230:

##### ■ DIN-50S-01

Terminal Board with One 50-pin SCSI-II Connector and DIN-Rail Mounting (Cables are not included.)

##### ■ ACL-10250-1

50-pin SCSI-II cable (mating with AMP-787082-5), 1 M

\* For more information on mating cables, please refer to P3-48/49.

### Ordering Information

#### ■ PCI-7230

16-CH Isolated DI & 16-CH Isolated DO Card

#### ■ PCI-7233

32-CH Isolated DI Card with inversed input logic

#### ■ PCI-7234

32-CH Isolated DO Card

#### ■ PCI-7234P

32-CH Isolated DO Card with Source Current Transistor

#### ■ LPCle-7230

16-CH Isolated DI & 16-CH Isolated DO Low-Profile PCI Card

#### ■ LPCle-7230

16-CH Isolated DI & 16-CH Isolated DO Low-Profile PCI Express® Card

### Features

- Supports a 32-Bit 5 V PCI bus (PCI-7230/7233/7234/7234P)
- Supports a 32-Bit 3.3 V or 5 V PCI bus (LPCI-7230)
- x1 lane PCI Express Interface (LPCle-7230)
- 16-CH isolated digital inputs & 16-CH isolated digital outputs (PCI-7230/LPCI-7230/LPCle-7230)
- 32-CH isolated digital inputs (PCI-7233)
- 32-CH isolated digital outputs (PCI-7234/7234P)
- 5000 V<sub>RMS</sub> optical isolation (PCI-7230 & PCI-7233)
- 2500 V<sub>RMS</sub> optical isolation (PCI-7234/7234P/LPCI-7230/LPCle-7230)
- Sink current up to 500 mA on single isolated output
- Two external interrupt sources (PCI-7230/LPCI-7230/LPCle-7230)
- Change-of-state interrupt sources (PCI-7233)
- Compact, low-profile PCI/PCI Express® size PCB (LPCI-7230/LPCle-7230)
- Supported Operating System
  - Windows 7/8 x64/x86, Linux
- Driver and SDK
  - LabVIEW, MATLAB, C/C++, Visual Basic, Visual Studio.NET
- Software Utility
  - AD-Logger

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Data Logging & Acquisition category](#):*

*Click to view products by [ADLINK Technology manufacturer](#):*

Other Similar products are found below :

[PCI-6208A](#) [DAQe-2502](#) [PXI-2208](#) [ACL-8112DG](#) [SpotBotBLE](#) [LPCI-7230](#) [USB-4761-BE](#) [SE028](#) [PCI-1761-BE](#) [AR207/8/S1/PPPP/IP65](#)  
[PCI-1711UL-CE](#) [USB-4702-AE](#) [USB-4704-AE](#) [USB-4716-AE](#) [USB-4750-BE](#) [USB-4751-AE](#) [PCIE-1810-AE](#) [PCI-1710U-DE](#) [PCI-](#)  
[1710HGU-DE](#) [AR207/8/S1/PPPP/IP30](#) [U2781A](#) [4610](#) [EL-USB-5](#) [AR407/S1/P/P/P/P](#) [AR207/8/S2/PPPP/IP30](#) [ACL-8112PG](#) [cPCI-7248](#)  
[cPCI-7433](#) [DAQ-2213](#) [ND-6053](#) [ND-6060](#) [PCI-7230](#) [PCI-7432](#) [PCI-7442](#) [PCI-9112](#) [PCI-9112A](#) [PCI-9113A](#) [PCI-9221](#) [PCM-7248+](#) [USB-](#)  
[1903](#) [USB-2401](#) [PCIE-1813-AE](#) [PCIE-1816-AE](#) [PCIE-1816H-AE](#) [PCIE-1884-AE](#) [USB-5856-AE](#) [USB-5860-AE](#) [USB-5862-AE](#)  
[AR654/S1/P/P/P/P/IP30](#) [AR654/S2/P/P/P/P/IP30](#)