


# PCIe-FIW64/PCIe-FIW62

## 4-CH / 2-CH PCI Express® IEEE 1394b Frame Grabbers

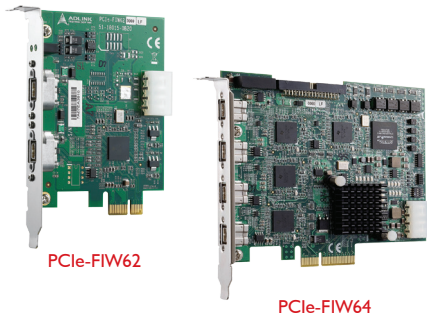

### Introduction

The PCIe-FIW64/PCIe-FIW62 are IEEE 1394b (FireWire 800) frame grabbers designed for high speed computer-based machine vision applications. The PCIe-FIW64/PCIe-FIW62 support up to four 1394b (FireWire 800) ports for multiple 1394b device connections with data transfer rates up to 3.2 Gb/s, as found with most IEEE 1394b cameras.

The PCIe-FIW64/PCIe-FIW62 provide four/two direct-connect IEEE 1394b connectors with a screw-lock mechanism. These screw-lock connectors provide a reliable connection between PCIe-FIW64/PCIe-FIW62 and up to four IEEE 1394b cameras.

A 4-pin ATX power connector on the PCIe-FIW64/PCIe-FIW62 support IEEE 1394b cameras that draw power directly from the frame grabbers. Each port has a green LED on the front panel that will illuminate when the PCIe-FIW64/PCIe-FIW62 are connected to a IEEE 1394b camera for convenient identification of channel connection status.

The PCIe-FIW64 provides four isolated digital inputs and outputs to connect to external devices such as a position sensor. The PCIe-FIW64 also includes four isolated programmable trigger output pulses to manage trigger events such as activating a strobe light.

### Features

- Industrial screw lock connector
- Channel status LEDs
- Power supplied to the IEEE 1394b connectors

#### FIW64

- PCI Express® x4 compliant
- High-speed image transfer rates up to 3.2 Gbps
- Four isolated digital inputs/outputs
- Four isolated TTL level programmable trigger output pulses

#### FIW62

- PCI Express® x1 compliant
- High-speed image transfer rates up to 800 Mb/s

### Applications

- Machine vision inspection systems
- Automatic optical inspection machineries
- Scientific research instrumentations
- Medical research instrumentations

### Software Support

- OS Information
  - Windows® 8/7/XP

### Ordering Information

- PCIe-FIW64**  
4-CH PCI Express® x4 IEEE 1394b frame grabber
- PCIe-FIW62**  
2-CH PCI Express® x1 IEEE 1394b frame grabber

### Specifications

	PCIe-FIW64	PCIe-FIW62
Form Factor	PCI Express® x4 compliant	PCI Express® x1 compliant
IEEE 1394b Port	Fully support provisions of IEEE P1394b-2002 Fully compliant with provisions of IEEE std 1394-1995 for a high performance serial bus and IEEE std 1394a-2000	
Operating Environment	Temperature: 0°C to +55°C (32°F to 131°F) Humidity: 5% to 90%	
Storage Environment	Temperature: -20°C to +85°C (-4°F to 185°F) Humidity: 0 to 95% RHNC	
Digital and Trigger I/Os	Four isolated digital inputs/outputs Four isolated trigger inputs/outputs	-
Power Requirements	+12 V max @ 0.2 A +3.3 V max @ 2.5 A	+3.3 V max @ 0.22 A Power provided to IEEE 1394 connection +12 V / per port, 1 A (over current protection)
Isolated Voltage	1000 V @ 60 seconds	-
Dimensions	129.5 mm x 111.15 mm (5.05" x 4.33") (W x L)	78.6 mm x 111.15 mm (3.06" x 4.33") (W x L)

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Interface Modules](#) category:*

*Click to view products by [ADLINK Technology](#) manufacturer:*

Other Similar products are found below :

[8500-003](#) [IFD8520](#) [cPCI-3544](#) [422CON](#) [ATX6022/14GP7](#) [ATX6022/8](#) [AX93221-24/48](#) [FC6A-EXM2](#) [OPT8AP-AE](#) [96RMKVM-19V1C-A](#)  
[60016-011](#) [60016-014](#) [60006-008](#) [60011-075](#) [HPCI-14S12U](#) [cBP-3208](#) [cBP-3062A](#) [FAB205-6P5](#) [ATX6022/6](#) [60016-012](#) [96RMKVM-](#)  
[17V1C-A](#) [PCE-DP10-00A1E](#) [MOS-1120Y-0201E](#) [96RMLCD-17V1-A](#) [96RMKVM-17V8C-A](#) [60004-005](#) [60016-017](#) [60006-009](#) [60016-035](#)  
[60016-034](#) [60016-031](#) [60016-030](#) [60016-026](#) [60016-024](#) [60016-018](#) [60016-007](#) [60016-005](#) [60007-002](#) [60006-010](#) [AXX10GBTWLHW3](#)  
[382-BBEH](#) [555-BDCL](#) [K6CMISZBI52](#) [426451401-3](#) [60011-093](#) [MIC-3620/3-BE](#) [MPCIE-UART-KIT02-R20](#) [RSM232](#) [PCIE-1680-AE](#) [BB-](#)  
[FOSTCDRI](#)