



ULTRAVOLT® V SERIES
VERTICAL, MICRO-SIZED
HIGH VOLTAGE BIASING SUPPLIES





Single-output micro-sized HV modules

The vertical, micro-sized V series is the ideal solution for applications that require a bias voltage ranging from 0 to 3000 V and very small current, at only 13.8 cc (0.84 in³). With a footprint under 2.54 cm² (1 in²), these modules are perfect for applications with limited board space.

Functions


- › 7 models from 0 to 600, 1000, 1250, 1500, 2000, 2500, or 3000 V
- › 0.5, 0.8, or 1 W of output power
- › Tight line/load regulation
- › Arc and continuous short circuit protection
- › Self-restoring output voltage
- › Low cost
- › Miniature and lightweight
- › Voltage monitoring
- › Low ripple (0.01% peak to peak)
- › Optional flying lead for high voltage output

Typical Applications

- › Bias supplies
- › Electrostatic chucks
- › Hand held X-Ray Florescence (XRF)
- › Avalanche photo diodes (APD)
- › Photomultiplier Tubes (PMT)
- › Silicon Detector (SiD)
- › X-Ray Flat Panel detector (FPD)
- › Ionization Chamber detector



PARAMETER	SPECIFICATIONS					
Input Voltage Vin (Pins 1 and 2)	5 ±0.5 (2 to 3 kV ONLY) 12 ±1, 15 ±1 (600 V to 1.5 kV ONLY), or 24 ±2					
Input Voltage	5 (2 to 3 kV ONLY)			12		
Input Current	No load: 55, full load: 450			No load: 45, full load: 200		
Polarity	Fixed positive and fixed negative					
Output Voltage	0 to 600			0 to 1000		
Input Voltage	12	15	24	12	15	24
Output Power	0.5	0.8	1	0.5	0.8	1
Output Current	0.83	1.33	1.67	0.5	0.8	1
Output Voltage	0 to 2000			0 to 2500		
Input Voltage	5	12	24	5	12	
Output Power	0.5	0.8	1	0.5	0.8	
Output Current	0.25	0.40	0.50	0.20	0.32	
HV Setting	10 to 100K (potentiometer across Vref. and signal ground, wiper to adjust)					
Load Voltage Regulation	< 0.01% of full output voltage for no load to full load					
Line Voltage Regulation	< 0.01% of full output voltage over specified input voltage range					
Residual Ripple	< 0.01% at full load					
Temperature Coefficient	100 ppm/°C for the max output voltage after starting and over temperature range 0 to 50°C					
Output Voltage Monitor (600 to 1500 V)	+1 V/1 kV max or -1 V/-1 kV max according to model polarity output impedance = 200 kΩ ±1%					
Output Voltage Monitor (2 to 3 kV)	12 to 24 V input only: 0 to +5 V ±2% 5 V inputs: 0 to +2.5 V ±2%					
Reference Voltage	12 to 24 V input only: 5 V ±1%, TC: 100 ppm/°C, max output current: 1 mA 5 V inputs: 2.5 V ±1%, TC: 100 ppm/°C, max output current: 1 mA					
Operating Temperature	-10 to +65, full load, max Eout, case temp.					
Storage Temperature	-20 to +70					
Safeguards	Arc and short circuit protection					
Options	Flying lead for HV output					
Enhanced Interface (-EI) Option (2 to 3 kV Only)	Enable/disable (ON/OFF): 0 V to +0.5 V enable, +2.4 V to V_input disable (default = disable) Output current monitor (5 V input only): 0 to +2.5 V ±2% Output current monitor (12 to 24 V input): 0 to +5.0 V ±2%					

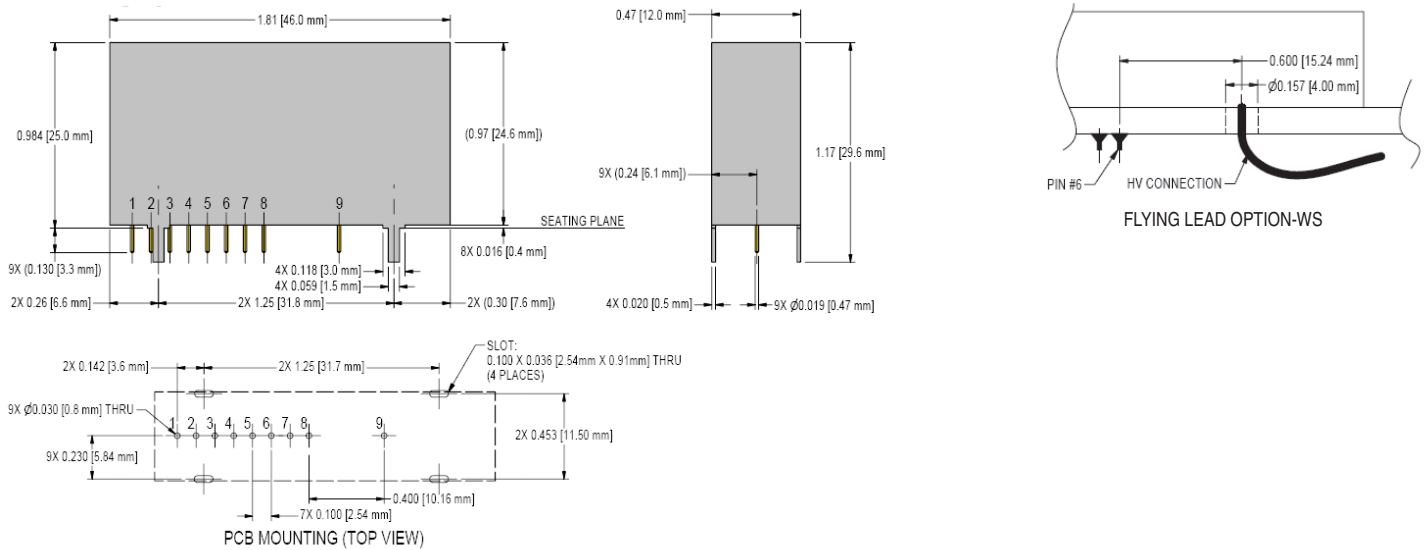

Note: Pins 7 and 8 are available for 2 kV to 3 kV units with enhanced interface option ONLY. Drawing views: third angle projections.

PHYSICAL SPECIFICATIONS	
Construction	Steel, tin-plated, thickness 0.5 mm (0.02") Insulation: fully potted in an epoxy resin
Volume	13.8 cc (0.84 in ³)
Weight	35 g (1.23 oz)
Tolerance	
Overall	±0.76 mm (0.0030")
Pin to Pin	±0.38 mm (0.015")
Tabs Location	±0.51 mm (0.020")
Tab to Tab	±0.25 mm (0.010")

Notes: 0.47 mm (0.019") round pins, length: 3 mm (0.12"), spacing: 2.54 mm (0.1")

PCB mounting through 4 mounting tabs: length: 5 mm (0.2"), width: 1.5 mm (0.059"), thickness: 0.5 mm (0.02")

Optional flying lead for HV output: coaxial cable (RG178), diameter: 2 mm (0.079"), length: 500 mm (19.685")

CONNECTIONS	
Pin	Function
1	POSITIVE POWER INPUT
2	POWER GROUND
3	SIGNAL GROUND
4	REMOTE ADJUST INPUT
5	REFERENCE VOLTAGE
6	VOLTAGE MONITOR
7	CURRENT MONITOR (available with -EI option ONLY)
8	ENABLE (available with -EI option ONLY)
9	HV OUTPUT


Note: Mounting tabs must be connected to ground.

ORDERING INFORMATION

Type	0 to 600 VDC Output	0.6 V
	0 to 1000 VDC Output	1 V
	0 to 1250 VDC Output	1.25 V
	0 to 1500 VDC Output	1.5 V
	0 to 2000 VDC Output	2 V
	0 to 2500 VDC Output	2.5 V
	0 to 3000 VDC Output	3 V
Input	5 VDC Nominal (2 to 3 kV Only)	5
	12 VDC Nominal	12
	15 VDC Nominal (600 V to 1.5 kV Only)	15
	24 VDC Nominal	24
Power	0.5 W Output	0.5
	0.8 W Output	0.8
	1 W Output	1
Case	Tin Steel Case	(Standard)
Polarity	Positive Output	-P
	Negative Output	-N
Option	Shielded Flying Lead for HV Output (600 V to 1.5 kV Only)	-WS
	Flying Lead for HV Output (2 to 3 kV Only)	-W
	Current Monitor/Enable Pin (2 to 3 kV Only)	-EI



RoHS COMPLIANT Non-RoHS compliant units are available. Please contact the factory for more information.

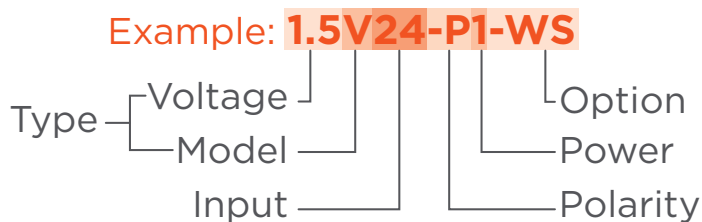

The V series is not available in all territories. Please contact Advanced Energy for details concerning sales in your area.



For international contact information, visit
advanced-energy.com.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Non-Isolated DC/DC Converters](#) category:

Click to view products by [Advanced Energy](#) manufacturer:

Other Similar products are found below :

[PSR152.5-7IR](#) [APTH003A0X-SRZ](#) [SPM1004-3V3C](#) [R-785.0-05](#) [10E24-P15-10PPM](#) [1E24-P4-25PPM-SHV-5KV](#) [CA-17205-L4](#)
[PROPOWER-3.3V](#) [MYGTM01210BZN](#) [40C24-N250-I5-H](#) [40A24-P30-E](#) [3V12-P0.8](#) [10C24-N250-I10-AQ-DA](#) [4AA24-P20-M-H](#) [3V12-](#)
[N0.8](#) [3V24-P1](#) [3V24-N1](#) [BMR4672010/001](#) [BMR4652010/001](#) [6AA24-P30-I5-M](#) [6AA24-N30-I5-M](#) [BM2P101X-Z](#) [35A24-P30](#) [2.5M24-P1](#)
[PTV03010WAD](#) [PTV05020WAH](#) [PTV12010LAH](#) [PTV12020WAD](#) [R-7212D](#) [R-7212P](#) [R-78AA15-0.5SMD](#) [R-78AA5.0-1.0SMD](#) [30A24-](#)
[N15-E](#) [10A12-P4-M](#) [10C24-N250-I5](#) [10C24-P125](#) [10C24-P250-I5](#) [6A24-P20-I10-F-M-25PPM](#) [1A24-P30-F-M-C](#) [TSR 1-24150SM](#)
[1/2AA24-N30-I10](#) [1C24-N125](#) [12C24-N250](#) [V7806-1500](#) [PTV12020LAH](#) [PTV05010WAH](#) [PTN04050CAZT](#) [PTH12020WAD](#)
[PTH12020LAS](#) [PTH05050YAH](#)