

NPN SILICON RF POWER TRANSISTOR

DESCRIPTION:

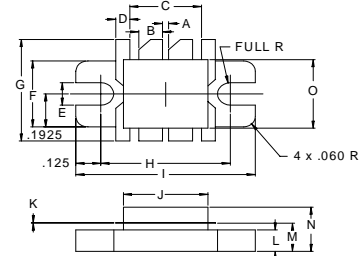
The **ASI BLV57** is Designed for use as push-pull amplifier, primarily in linear UHF TV transmitting Applications.

FEATURES:

- Input Matching Network
- Common emitter
- **Omnigold™** Metalization System with eutectic die bonding

MAXIMUM RATINGS

I_C	2.0 A
V_{CESM}	50 V
V_{CE}	27 V
P_{DISS}	77 W @ T _C = 25 C
T_J	-65 °C to +200 °C
T_{STG}	-65 °C to +150 °C
θ_{JC}	2.27 °C/W

PACKAGE STYLE .400 8L FLG


DIM	MINIMUM inches / mm	MAXIMUM inches / mm
A		.030 / 0.76
B	.115 / 2.92	.125 / 3.18
C		.360 / 9.14
D	.065 / 1.65	.075 / 1.91
E		.130 / 3.30
F	.380 / 9.65	.390 / 9.91
G	.735 / 18.67	.765 / 19.43
H	.645 / 16.38	.655 / 16.64
I	.895 / 22.73	.905 / 22.99
J	.420 / 10.67	.430 / 10.92
K	.003 / 0.08	.007 / 0.18
L	.120 / 3.05	.130 / 3.30
M	.159 / 4.04	.175 / 4.45
N		.280 / 7.11
O	.395 / 10.03	.405 / 10.29

ORDER CODE: ASI10646
CHARACTERISTICS T_C = 25 °C

SYMBOL	TEST CONDITIONS	MINIMUM	TYPICAL	MAXIMUM	UNITS
BV_{CEO}	I _C = 25 mA	27			V
BV_{CES}	I _C = 10 mA	50			V
BV_{EBO}	I _E = 5.0 mA	3.5			V
I_{CES}	V _E = 27 V			10	mA
h_{FE}	V _{CE} = 25 V I _C = 850 mA	15			---
f_T	V _{CB} = 25 V I _E = 1.7 A		2.5		GHz
	V _{CB} = 25 V I _E = 850 mA		2.5		
P_G IMD₁	V _{CE} = 25 V I _C = 850 mA f = 860 MHz P _{OUT} = 6.0 W	8.0 -60			dB dBc

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [RF Bipolar Transistors](#) *category:*

Click to view products by [Advanced Semiconductor](#) *manufacturer:*

Other Similar products are found below :

[MAPRST0912-50](#) [MCH4016-TL-H](#) [MMBT5551-G](#) [MRF10120](#) [15GN01CA-TB-E](#) [PH1214-25M](#) [MAPRST0912-350](#) [MMBTH10-TP](#) [BFP640F H6327](#) [BFP 720F H6327](#) [BFP 740F H6327](#) [BFR 360F H6765](#) [MRF10031](#) [NSVF4009SG4T1G](#) [BFP 182R E7764](#)
[BFP405H6740XTSA1](#) [MRF10350](#) [BFR360FH6765XTSA1](#) [BFP410H6327XTSA1](#) [BFP620FH7764XTSA1](#) [BFP720ESDH6327XTSA1](#)
[BFP720FH6327XTSA1](#) [BFR360L3E6765XTMA1](#) [BFP420H6433XTMA1](#) [BFP420H6740XTSA1](#) [BFP420H6801XTSA1](#) [MCH4015-TL-H](#)
[BF888H6327XTSA1](#) [MMBT2222A-G](#) [BFP196WH6327XTSA1](#) [BFP405FH6327XTSA1](#) [BFP640ESDH6327XTSA1](#)
[BFR193L3E6327XTMA1](#) [BFS483H6327XTSA1](#) [NSVF4020SG4T1G](#) [NSVF6003SB6T1G](#) [MRF10005](#) [BFP420FH6327XTSA1](#)
[BFP740FESDH6327XTSA1](#) [BFR181E6327HTSA1](#) [BFR181WH6327XTSA1](#) [BFR182E6327HTSA1](#) [BFR193E6327HTSA1](#)
[BFP181E7764HTSA1](#) [BFP183WH6327XTSA1](#) [BFP720H6327XTSA1](#) [BFR182WH6327XTSA1](#) [BFU590GX](#) [MAPR-000912-500S00](#)
[BFR340FH6327XTSA1](#)