


# BGA Heat Sink - High Performance Cross-Cut Tape On

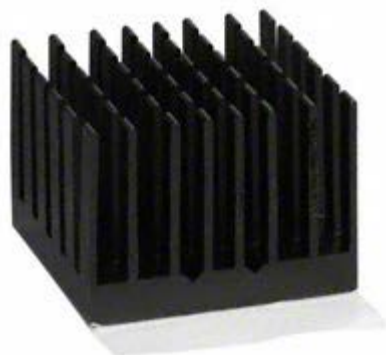

ATS Part#: **ATS-55270R-C1-R0**  
 Description: 27.00 x 27.00 x 19.50 mm BGA Heat Sink - High Performance Cross-Cut Tape On

Heat Sink Type: **Cross-cut**  
 Heat Sink Attachment: **Tape On**  
 Equivalent Part Number: **ATS-55270R-C2-R0**

*\*Image above is for illustration purpose only.*

## Features & Benefits

- High efficiency cross-cut fin design provides low pressure drop characteristics
- Large surface area increases heat sink performance
- Designed for BGAs and surface mount packages
- Comes preassembled with high performance thermal interface material

## Thermal Performance

| AIR VELOCITY       |               | @200 LFM<br>1.0 M/S | @300 LFM<br>1.5 M/S | @400 LFM<br>2.0 M/S | @500 LFM<br>2.5 M/S | @600 LFM<br>3.0 M/S | @700 LFM<br>3.5 M/S | @800 LFM<br>4.0 M/S |
|--------------------|---------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|---------------------|
| THERMAL RESISTANCE | Unducted Flow | 5.8 °C/W            | NA °C/W             | NA °C/W             | NA °C/W             | NA °C/W             | NA °C/W             | NA °C/W             |
|                    | Ducted Flow   | 0                   | N/A                 | N/A                 | N/A                 | N/A                 | N/A                 | N/A                 |

## Product Detail

| Schematic Image   | Dimension A | Dimension B | Dimension C | Dimension D | TIM  | Finish         |
|---|-------------|-------------|-------------|-------------|------|----------------|
|   | 27.00 mm    | 27.00 mm    | 19.50 mm    | N/A mm      | T412 | BLACK-ANODIZED |
| <p><b>Notes:</b></p> <ul style="list-style-type: none"> <li>• Dimension <b>A</b> and <b>B</b> refer to component size.</li> <li>• Dimension <b>C</b> is the heat sink height from the bottom of the base to the top of the fin field.</li> <li>• ATS-55270R-C2-R0 is the exact heat sink assembly with an equivalent thermal interface material (Saint-Gobain C675).</li> <li>• Thermal performance data are provided for reference only. Actual performance may vary by application.</li> <li>• ATS reserves the right to update or change its products without notice to improve the design or performance.</li> <li>• ATS certifies that this heat sink assembly is RoHS-6 and REACH compliant.</li> <li>• Contact ATS to learn about custom options available.</li> </ul> |             |             |             |             |      |                |

*\*Image above is for illustration purpose only.*

For more information, to find a distributor or to place an order, please contact us at 781-769-2800 (North America), [sales@qats.com](mailto:sales@qats.com) or [www.qats.com](http://www.qats.com).

© 2013 Advanced Thermal Solutions, Inc. | 89-27 Access Road | Norwood MA | 02062 | USA



**ATS** ADVANCED THERMAL SOLUTIONS, INC.  
 Innovations in Thermal Management®

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Heat Sinks](#) category:*

*Click to view products by [Advanced Thermal Solutions](#) manufacturer:*

Other Similar products are found below :

[581102B00000G](#) [656-15ABPE](#) [657-20ABPNE](#) [7020B-TC12-MTG](#) [73452PPBA](#) [7G0011A](#) [PF720G](#) [A22-4026](#) [120-1873-007](#) [HAH10L](#)  
[1542616-1](#) [HS-2506-F1](#) [HS-87M0-F2](#) [218-40CTE3](#) [25-7520](#) [SW50-4G](#) [231-75PAB-13V](#) [231-75PAB-15V](#) [253-122ABE-22](#) [PSC22CB](#)  
[HAF10L](#) [HAQ10T](#) [D10100-28](#) [BDN183CBA01](#) [3-21053-4](#) [32438](#) [TX0506-1B](#) [TX1806B](#) [LAE66A3CB](#) [WA-DT2-101E](#) [511-3U](#)  
[73381PPBA](#) [73403PPBA](#) [7G0047C](#) [COMX-440-HSP](#) [510-12M](#) [D10650-40T5](#) [V8511 Y](#) [APF40-40-13CB/A01](#) [780653U04500G](#) [ATS-](#)  
[54310K-C2-R0](#) [FK 216 CB SA](#) [FK 231 SA 220](#) [648-51AB](#) [657-20ABPESC](#) [2341BG](#) [679-25AG](#) [FK 212 CB SA](#) [FK225 SA L1](#) [680-5K](#)