DIY COLD PLATES



ATS-CP-1000-DIY

The DIY family of high-performance IGBT cold plates provides engineers with the freedom to drill holes to match the specific connection points of the electronic devices that are being cooled. Each cold plate has an etched "no drill zone" to provide a visual guide.

On the outside of the "no drill zone," through holes can be drilled at any point. (Avoid drilling into the I/O ports.) Inside the "no drill zone" holes can only be drilled to a depth of 6 mm to avoid damaging the internal fin field. (See drawing on page 2.)

The ATS-CP-1000-DIY cold plate, at a flow rate of 4 L/min, can transfer 1kW of heat at 5.5°C temperature difference between the cold plate base and inlet fluid temperature.

FEATURES AND BENEFITS

- More than 30% improvement in thermal performance compared to commercially available cold plates
- Compatible with industry accepted coolants
- > 1/4 NPT threaded input and output
- » Low pressure drop

- Provides uniform cold plate surface temperature when IGBTs are installed
- Provides same performance as standard ATS cold plates, but without pre-drilled holes
- » Lightweight for ease of transportation
- » Maximum pressure: 60 psi



Cold Plates



ATS has the products needed to design a complete liquid cooling loop: **Cold Plates** to transfer and remove the heat from the source, **Heat Exchangers** to transfer heat from the liquid to the air with or without a fan, and **Chillers** to circulate and condition the fluid in the system. In addition, ATS offers **Flow Meters** to instantaneously measure the volumetric flow rate of the fluid in the system and **Leak Detectors** to notify users of any leaks in the system.

DIMENSIONS (L X W X H) 202 X 130 X 20 mm (7.9 X 5.1 X 0.8")

INLET/OUTPUT PORTS 1/4 – 18 NPT

MATERIAL ALUMINUM 6061-T6

WEIGHT 1,200g *Image for illustration purposes only

ATS COLD PLATES

•

» Innovative Technology

Superior heat transfer, flexible design platform

» Compact Design

Designed to fit standard IGBT and other power electronics applications

» Easy Connections

Industry standard threaded hole sizes allows for hassel-free connection options

» Safe & Reliable

Leak Free (100% tested:100 psi)

» Custom Options

Choose from various options, i.e; fitting types, material types, device mounting and more. Contact ATS for additional information

» Customization Available!

ATS will customize any of the cold plates to fit into your application

APPLICATIONS


Automotive Industry, Uninterruptible Power Supplies, Wind Turbines, Photovoltaic Inverters, Power Electronics, Induction Heaters, Motor Devices, Utility Vehicles, Anywhere power devices are used





ATS-CP-1000-DIY

PERFORMANCE CURVES

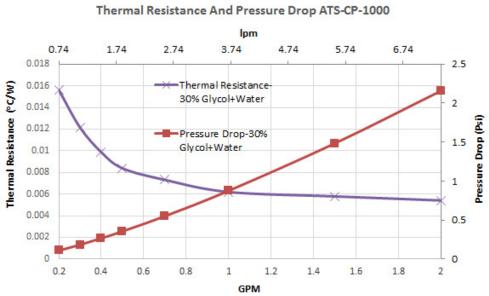


ATS Cold Plate Family			
Part Number	Dimensions* (L x W x H)	Flow Rate (L/min)	ΔT @ 1kW
ATS-CP-1000-DIY	202 x 130 x 20	4 L/min	5.50°C
ATS-CP-1001-DIY	198 x 147 x 20	4 L/min	5.00°C
ATS-CP-1002-DIY	162 x 136 x20	4 L/min	7.00°C
ATS-CP-1003-DIY	162 x 147 x 20	4 L/min	6.80°C
ATS-CP-1004-DIY	162 x 172 x 20	4 L/min	5.90°C

Flow rate (gallon/min)**	R (°C/W)	DeltaP (psi)
2	0.0054	2.2
1	0.0062	0.87
0.5	0.0083	0.35
0.2	0.016	0.1

* All Dimensions in mm

** Note: To convert to I/min, multiply by 3.7

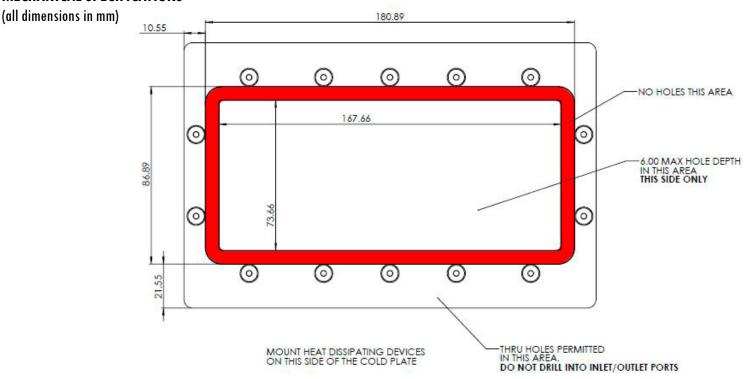

For further technical information, please contact Advanced Thermal Solutions, Inc. by phone: **1-781-769-2800**, email **ats-hq@qats.com** or visit **www.qats.com**.

MECHANICAL SPECIFICATIONS

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Heat Sinks category:

Click to view products by Advanced Thermal Solutions manufacturer:

Other Similar products are found below :

 581102B00000G
 656-15ABPE
 657-20ABPNE
 7020B-TC12-MTG
 73452PPBA
 7G0011A
 PF720G
 A22-4026
 120-1873-007
 HAH10L

 HAH15L
 1542616-1
 HS-2506-F1
 HS-87M0-F2
 218-40CTE3
 231-69PAB-15V
 25-7520
 SW50-4G
 231-75PAB-13V
 231-75PAB-15V
 253

 122ABE-22
 PSC22CB
 HAF10L
 HAQ10T
 D10100-28
 BDN183CBA01
 3-21053-4
 32438
 TX0506-1B
 TX1806B
 LAE66A3CB
 WA-DT2

 101E
 511-3U
 73381PPBA
 73403PPBA
 7G0047C
 COMX-440-HSP
 510-12M
 D10650-40T5
 V8511 Y
 APF40-40-13CB/A01

 780653U04500G
 ATS-54310K-C2-R0
 FK 216 CB SA
 FK 231 SA 220
 648-51AB
 657-20ABPESC
 2341BG
 679-25AG
 FK 212 CB SA