ACP-2020

2U Rackmount Short Depth Chassis for ATX and mATX Motherboard



Features

- 398 mm short depth 2U rackmount chassis
- Supports ATX and mATX form factor single processor motherboard
- Two Internal 2.5" drive bay and two "hot-swap or external" drive bay
- Supports 80 Plus single 350W or 500W redundant power supply
- Front-accessible system fan without opening top cover for easy maintenance
- Built-in Intelligent System Module enabling whole system fan control and remote manageability

C € FCC

Specifications


Drive Bay		External	Internal		
	Slim Optical Drive	1	-		
	2.5"	2 (hot-swap tray module as optional)*	2		
Cooling	Fan	1 (8 cm/41CFM)			
Cooling	Air Filter	Yes			
Front I/O Interface	USB 3.0*	2			
Missellansous	LED Indicators	Power, HDD, temperature, fan, LAN1, and LAN2			
Miscellaneous	Rear Panel	Two 9-pin D-Sub			
Intelligent System Module Remote Monitoring	CPU/System fan speed, CPU/System temperature, motherboard voltage (Only selected Advantech MBs/CPU cards with WISE-PaaS/RMM installed can fully enabled these functions, check with Advantech local rep. for detailed information.)				
	·	Operating	Non-Operating		
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	-20 ~ 60 °C (-4 ~ 140 °F)		
Environment	Humidity	10 ~ 85% @ 40 °C, non-condensing	10 ~ 95% @ 60 °C, non-condensing		
	Vibration (5 ~ 500 Hz)	1 Grms	2 G		
	Shock	10 G (with 11 ms duration, half sine wave)			
Dhysical Characteristics	Dimensions (W x H x D)	482 x 88 x 398 mm (18.96" x 3.46" x 15.67")			
Physical Characteristics	Weight	8.6 kg (18.96 lbs)			


The USB 3.0 ports do not operate if the motherboard has no on-board USB 3.0 box header.

* ACP-2020 2.5" drive bay, both default internal and hot-swap tray module support 2.5" HDD with thickness less than 14.7mm.

module 98R1310010E

* The hot-swap module only accepts 2.5" SATA HDD/SSD

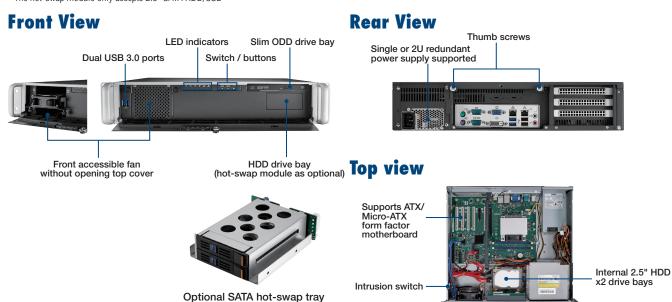

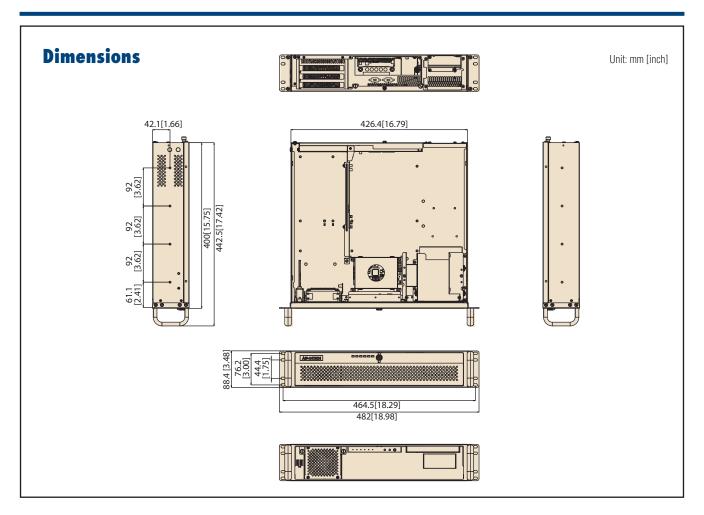

Ordering Information

Part Number	Power supply	80 Plus grade	Power supply type	Wattage	Switch
ACP-2020MB-35ZE	PS8-350FATX-XE	Bronze	Single	350W	ATX
ACP-2020MB-50RE	RPS8-500U2-XE	Bronze	1+1 redundant	500W	ATX

Suggest using CPU cooler 1960052651N021, max. CPU TDP 84W with no add-on card configuration.

Optional Accessories

Part Number	Description
96CB-SATAPOWER-6P2	SATA power wire 6-pin to big 4-pin (for slim ODD)
1990021407T000	Door filter
98R1310010E	2.5" SATA Hot-swap module

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Modules Accessories category:

Click to view products by Advantech manufacturer:

Other Similar products are found below:

7010-0001 AX98219 A1UL8RISER F1UJPMICRISER FHW1U16RISER 20-101-0440 2828736-1 MBCDROM AX61221TM VM-105
EA CARREDIPTFT02 RK-210E-B E226171106 88606200030E SI-HDMI-EDID-EM MIC-75M13-00A1E FPM-1000T-SMKE AMKR004E 96FMCF-ST2ADAPTER1 AHWKPTP12GBGB AXXSTCPUCAR FPK-07-R10 Mini Din 6P to 6P HARNESS FPF1320 POWER
MULTIPLEXER CARRIER 881261510A0E AXXP3SWX08080 conga-B7XD/CSP-Cu-B 881281021A0E HFT for mounting KIT
FN928X_FN929X BB-MH112-1A 15100600 9-5000-1116 BKCMCR1ABB 70763 98R3612003E 881261910A0E 106897 48222R
BREAK OUT BOARD 20 4D ARDUINO ADAPTOR SHIELD II 20926110901 PYCASE GREEN PYCASE BLUE FP15072_ZORYA-SCHEKLA 20952000004 20953000007 DP-DVI-R10 575-BBIS RACK-220GW/A130B 492-BBKM