# ACP-4010

# Quiet 4U Rackmount Chassis for ATX/CEB/EEB Motherboard or Full-size SHB/SBC with Dual System Support



#### **Features**

- Supports either an ATX/CEB/EEB single/dual processors motherboard or a PICMG backplane with up to 15 slots
- Supports one or two systems in a single chassis
- Shock-resistant disk drive bay design holds up to two 5.25" and two 3.5" disk drives
- LED indicators and alarm notification for system fault detection
- Low noise system fans
- Built-in Intelligent System Module enables whole system fan control and remote manageability


# **Quiet Specifications**

C € FCC

| =                         |   |  |   |
|---------------------------|---|--|---|
|                           |   | External   | Internal  |
| Drive Bay                 | 5.25"   | 2  | -   |
|                           | 3.5"  | 1  | 1   |
| Cooling                   | Fan   | 2 (12 cm /85 CFM each)                                 |   |
| Country                   | Air Filter  | Yes  |   |
| Front I/O Interface       | USB 2.0   | 4  |   |
| FIUIL I/O IIILEHACE       | 9-pin D-Sub   | 2 (Reserved)   |   |
|                           | LED Indicators  | Power, HDD, temperature, fan, LAN1, and LAN2           |   |
| Miscellaneous             | Rear Panel Backplane version: One 9-pin D-Sub opening |  |   |
|                           |   | Motherboard version: Five 9-pin D-Sub and one 25-pin   | D-sub openings  |
| Intelligent System Module |   | U/System temperature, motherboard voltage              |   |
| Remote Monitoring         | (Only selected Advantech M detailed information.)     | Bs/CPU cards with WISE-PaaS/RMM installed can fully en | able these functions, check with Advantech local rep. for |
|                           | dotaliou illioillatioill)                             | Operating  | Non-Operating   |
|                           | Temperature   | 0 ~ 40 °C (32 ~ 104 °F)                                | -20 ~ 60 °C (-4 ~ 140 °F)                                 |
| Environment               | Humidity  | 10 ~ 85% @ 40 °C, non-condensing                       | 10 ~ 95% @ 40 °C, non-condensing                          |
|                           | Vibration (5 ~ 500 Hz)                                | 1 Grms   | 2 G   |
|                           | Shock   | 10 G (with 11 ms duration, half sine wave)             |   |
| Dhysical Characteristics  | Dimensions (W x H x D)                                | 482 x 177 x 479 mm (19" x 7.0" x 18.9")                |   |
| Physical Characteristics  | Weight  | 16.6 kg (36.5 lb)                                      |   |

<sup>\*</sup>Installation of all 15 full-size cards will sacrifice the two 3.5"disk drive bays.


#### **Front View**



#### **Inside View**



<sup>\*</sup>While an EEB motherboard is installed in the chassis, only one 3.5" and two 5.25" disk drive bays are available.

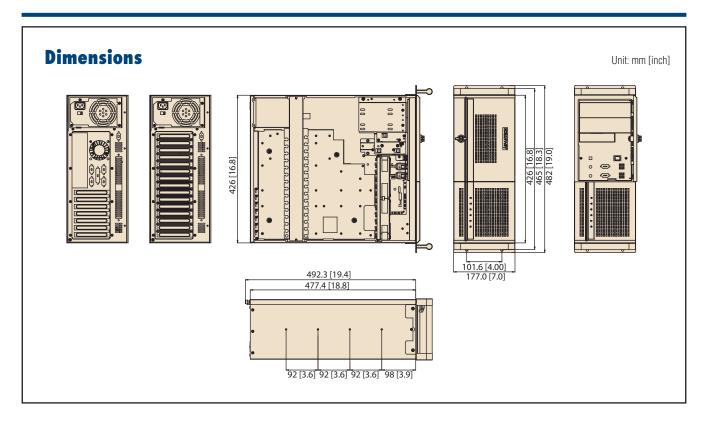

## **Ordering Information**

| Model Name |                            | Description                 |
|------------|----------------------------|-----------------------------|
|            | Backplane Version          |                             |
|            | ACP-4010BP-00BE            | Without PSU with ATX switch |
|            | <b>Motherboard Version</b> |                             |
|            | ACP-4010MB-00BE            | Without PSU with ATX switch |

### **Power Supply Options**

(For detailed power supply specs, please refer to Chapter 13)

| Part Number    | 80 Plus<br>Grade | Wattage | Туре             | Input                          |
|----------------|------------------|---------|------------------|--------------------------------|
| PS8-300ATX-ZBE | Bronze           | 300W    | Single           | AC 100 ~ 240 V (full range)    |
| PS8-400ATX-ZE  | Bronze           | 400W    | Single           | AC 100 ~ 240 V<br>(full range) |
| PS8-500ATX-ZE  | Bronze           | 500W    | Single           | AC 100 ~ 240 V<br>(full range) |
| RPS8-500ATX-XE | Bronze           | 500W    | 1+1<br>Redundant | AC 100 ~ 240 V<br>(full range) |
| RPS8-750ATX-XE | Gold             | 750W    | 1+1<br>Redundant | AC 100 ~ 240 V<br>(full range) |

## **Optional Accessories**

|  | _             |  |  |
|--|---------------|--|--|
|  | Part Number   | Description  |  |
|  | IPC-DT-3120E  | Mobile rack for converting a 3.5" drive bay to dual 2.5" SATA HDD trays                  |  |
|  | IPC-DT-5230E  | Mobile rack for converting dual 5.25" drive bays to three 3.5" SATA HDD trays            |  |
|  | 1700029268-01 | Power cable for GPU card (Two 4-pin 12V connectors to one 6+2 pins PCIe power connector) |  |
|  | 1700024754-01 | Power cable for GPU card (Two B4P Molex connectors to one 6+2 pins PCIe power connector) |  |

 $<sup>^{\</sup>star}$  If GPU card with 2 power connectors, please use 1700029268-01\*1 + 1700024754-01\*1;If GPU card with 1 power connector, please use 1700029268-01.

#### **Spare Parts**

| Part Number | Description             |
|-------------|-------------------------|
| 1990001299  | Fan filter 95 x 130 mm  |
| 1990001298  | Door filter 150 x 68 mm |

<sup>\*</sup> Only 500W or higher wattage PSU support 1700029268-01 and 1700024754-01 for high-end GPU card.

#### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Modules Accessories category:

Click to view products by Advantech manufacturer:

Other Similar products are found below:

7010-0001 AX98219 A1UL8RISER F1UJPMICRISER FHW1U16RISER 20-101-0440 2828736-1 MBCDROM AX61221TM VM-105
EA CARREDIPTFT02 RK-210E-B E226171106 88606200030E SI-HDMI-EDID-EM MIC-75M13-00A1E FPM-1000T-SMKE AMKR004E 96FMCF-ST2ADAPTER1 AHWKPTP12GBGB AXXSTCPUCAR FPK-07-R10 Mini Din 6P to 6P HARNESS FPF1320 POWER
MULTIPLEXER CARRIER 881261510A0E AXXP3SWX08080 conga-B7XD/CSP-Cu-B 881281021A0E HFT for mounting KIT
FN928X\_FN929X BB-MH112-1A 15100600 9-5000-1116 BKCMCR1ABB 70763 98R3612003E 881261910A0E 106897 48222R
BREAK OUT BOARD 20 4D ARDUINO ADAPTOR SHIELD II 20926110901 PYCASE GREEN PYCASE BLUE FP15072\_ZORYA-SCHEKLA 20952000004 20953000007 DP-DVI-R10 575-BBIS RACK-220GW/A130B 492-BBKM