ACP-4320

Quiet 4U Rackmount Chassis with Dual Hot-Swap SATA HDD Trays



Features

- Supports either an ATX motherboard or a PICMG backplane with up to 15 slots
- Supports dual SATA hot-swap HDD trays
- LED indicators and alarm notification for system fault detection
- Low noise system fans
- Built-in Intelligent System Module enabling whole system fan control and remote manageability

Quiet Specifications

C € FCC


Driver Bay		External	Internal
	5.25"	2	-
	3.5"	1 SATA Tray	-
	Hot Swap	2 (compatible with 3.5" or 2.5" devices)	
Cooling	Fan	1(12 cm/74 CFM) + 1 (6cm / 28 CFM)	
	Air Filter	Yes	
	Smart Fan	System fan speed referring to chassis thermal sensor, (Available with selected Advantech MBs/CPU cards)	or CPU temperature
Front I/O Interface	USB 2.0	2	
Miscellaneous	LED Indicators	Power, HDD, temperature, fan, LAN1 and LAN2	
	Rear Panel	Backplane version: One 9-pin D-Sub opening	
		Motherboard version: Five 9-pin D-Sub opening and o	one 25-pin D-sub opening
Intelligent System Module Remote Monitoring	CPU/System fan speed, CPU/system temperature, motherboard voltage (Only selected Advantech MBs/CPU cards with WISE-PaaS/RMM installed can fully enable these functions, check with Advantech local rep. for		
	detailed information.)		
Environment	,	Operating	Non-Operating
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	- 20 ~ 60 °C (-4 ~ 140 °F)
	Humidity	$10 \sim 85\%$ @ 40 °C , non-condensing	10 ~ 95% @ 40 °C, non-condensing
	Vibtration (5 ~ 500 Hz)	1 Grms	2 G
	Shock	10G (with 11 ms duration, half sine wave)	
Physical Characterisitics	Dimension (W x H X D)	482 x 177 x 479 mm (19" x 7.0" x 18.9")	
	Weight	17.6 kg (38.7lb)	

Front View

System reset button Alarm reset button Dual USB ports Two 5.25" drive bays Two SATA HDD trays

Inside View



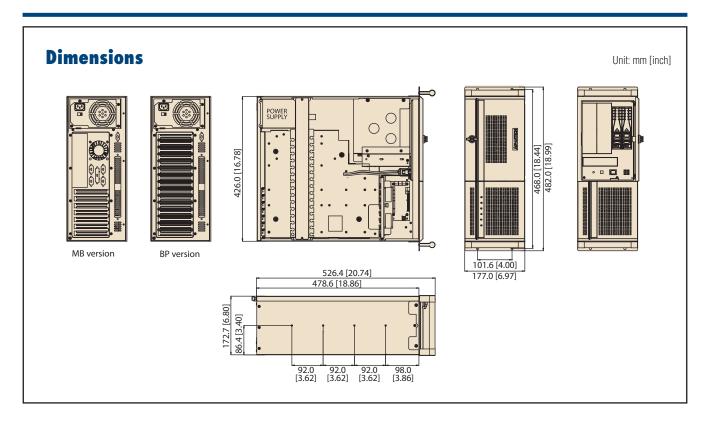

Ordering Information

Power supply	Wattage	Switch type			
PS8-250ATX-ZE	250W	ATX			
PS8-400ATX-ZE	400W	ATX			
PS8-500ATX-ZE	500W	ATX			
Motherboard version					
PS8-250ATX-ZE	250W	ATX			
PS8-400ATX-ZE	400W	ATX			
PS8-500ATX-ZE	500W	ATX			
	PS8-250ATX-ZE PS8-400ATX-ZE PS8-500ATX-ZE PS8-250ATX-ZE PS8-400ATX-ZE	PS8-250ATX-ZE 250W PS8-400ATX-ZE 400W PS8-500ATX-ZE 500W PS8-250ATX-ZE 250W PS8-400ATX-ZE 400W			

Optional Accessories

-		
Part Number	Description	
IPC-DT-3120E	Mobile rack for converting a 3.5" drive bay to dual 2.5" SATA HDD trays	
IPC-DT-5230E	Mobile rack for converting dual 5.25" drive bays to three 3.5" SATA HDD trays	
1700007351	M Cable SATA 7P/SATA 7P 40CM C=R 90/180	
1700029268-01	Power cable for GPU card (Two 4-pin 12V connectors to one 6+2 pins PCIe power connector)	
1700024754-01	Power cable for GPU card (Two B4P Molex connectors to one 6+2 pins PCIe power connector)	

^{*} When choosing ASMB-7 series for system mother board, 2pcs right-angle SATA cable (PN: 1700007351) are necessary for hot-swap driver bay.

Spare Parts

Part Number	Description
1990001299	Fan filter 95 x 130 mm
1990001298	Door filter 150 x 68 mm

 $^{^{\}star}$ If GPU card with 2 power connectors, please use 1700029268-01*1 + 1700024754-01*1,If GPU card with 1 power connector, please use 1700029268-01.

 $^{^{\}star}$ Only 500W or higher wattage PSU support 1700029268-01 and 1700024754-01 for high-end GPU card.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Modules Accessories category:

Click to view products by Advantech manufacturer:

Other Similar products are found below:

7010-0001 AX98219 A1UL8RISER F1UJPMICRISER FHW1U16RISER 20-101-0440 2828736-1 MBCDROM AX61221TM VM-105
EA CARREDIPTFT02 RK-210E-B E226171106 88606200030E SI-HDMI-EDID-EM MIC-75M13-00A1E FPM-1000T-SMKE AMKR004E 96FMCF-ST2ADAPTER1 AHWKPTP12GBGB AXXSTCPUCAR FPK-07-R10 Mini Din 6P to 6P HARNESS FPF1320 POWER
MULTIPLEXER CARRIER 881261510A0E AXXP3SWX08080 conga-B7XD/CSP-Cu-B 881281021A0E HFT for mounting KIT
FN928X_FN929X BB-MH112-1A 15100600 9-5000-1116 BKCMCR1ABB 70763 98R3612003E 881261910A0E 106897 48222R
BREAK OUT BOARD 20 4D ARDUINO ADAPTOR SHIELD II 20926110901 PYCASE GREEN PYCASE BLUE FP15072_ZORYA-SCHEKLA 20952000004 20953000007 DP-DVI-R10 575-BBIS RACK-220GW/A130B 492-BBKM