


# ADAM-4017+ ADAM-4018+ ADAM-4019+


**8-ch Analog Input Module with Modbus**  
**8-ch Thermocouple Input Module with Modbus**  
**8-ch Universal Analog Input Module with Modbus**



ADAM-4017+

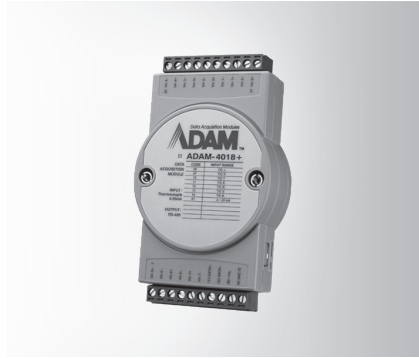

ADAM-4018+

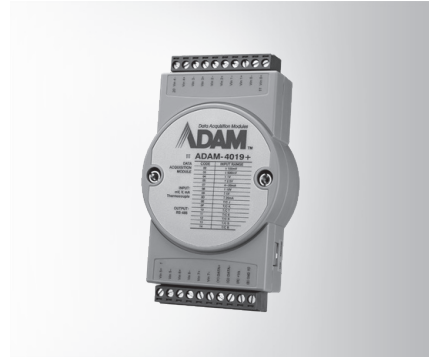

ADAM-4019+



## Specifications

### General

- **Power Consumption** 1.2 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU

### Analog Input

- **Channels** 8 differential
- **Channel Independent Configuration** Yes
- **Input Impedance** Voltage: 20 MΩ  
Current: 120 Ω
- **Input Type** mV, V, mA
- **Input Range** 0 ~ 150 mV, 0 ~ 500 mV, 0 ~ 1 V, 0 ~ 5 V, 0 ~ 10 V, ± 150 mV, ± 500 mV, ± 1 V, ± 5 V, ± 10 V, ± 20 mA, 0 ~ 20 mA, 4 ~ 20 mA

## Specifications

### General

- **Power Consumption** 0.8 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU

### Analog Input

- **Channels** 8 differential
- **Channel Independent Configuration** Yes
- **Input Impedance** Voltage: 20 MΩ  
Current: 120 Ω
- **Input Type** Thermocouple, mA
- **Input Range** ± 20 mA, 4 ~ 20 mA
- **T/C Types and Temperature Ranges**

<b>J</b>	0 ~ 760°C	<b>R</b>	500 ~ 1,750°C
<b>K</b>	0 ~ 1,370°C	<b>S</b>	500 ~ 1,750°C
<b>T</b>	-100 ~ 400°C	<b>B</b>	500 ~ 1,800°C
<b>E</b>	0 ~ 1,000°C		

- **Burnout Detection** All T/C

## Specifications

### General

- **Power Consumption** 1.0 W @ 24 V<sub>DC</sub>
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII command and Modbus/RTU

### Analog Input

- **Channels** 8 differential channels for individual input type
- **Channel Independent Configuration** Yes
- **Input Impedance** Voltage: 20 MΩ  
Current: 120 Ω
- **Input Type** T/C, mV, V, mA
- **Input Range** 0 ~ 100 mV, 0 ~ 500 mV, 0 ~ 1 V, 0 ~ 2.5 V, 0 ~ 5 V, 0 ~ 10 V, ± 100 mV, ± 500 mV, ± 1 V, ± 2.5 V, ± 5 V, ± 10 V, ± 20 mA, 0 ~ 20 mA, 4 ~ 20 mA,

- **T/C Types and Temperature Ranges**

<b>J</b>	0 ~ 760°C	<b>R</b>	500 ~ 1,750°C
<b>K</b>	0 ~ 1,370°C	<b>S</b>	500 ~ 1,750°C
<b>T</b>	-100 ~ 400°C	<b>B</b>	500 ~ 1,800°C
<b>E</b>	0 ~ 1,000°C	<b>N</b>	-200 ~ 1,300°C

- **Burnout Detection** 4 ~ 20 mA & all T/C

## Common Specifications

### General

- **Power Input** Unregulated 10 ~ 30 V<sub>DC</sub>
- **Connectors** 2 x plug-in terminal block (#14 ~ 22 AWG)

### Analog Input

- **Accuracy** Voltage mode: ±0.1% or better  
Current mode: ±0.2% or better
- **Resolution** 16-bit
- **Sampling Rate** 10 sample/second (total)

- **Isolation Voltage** 3,000 V<sub>DC</sub>
- **Overvoltage Protection** ±35 V<sub>DC</sub>
- **CMR @ 50/60 Hz** 120 dB
- **NMR @ 50/60 Hz** 100 dB
- **Span Drift** ±25 ppm/°C (Typical)
- **Zero Drift** ±6 μV/°C
- **Built-in TVS/ESD Protection**

### Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

## Ordering Information

- **ADAM-4017+-F** 8-ch Analog Input Module with Modbus
- **ADAM-4018+-F** 8-ch Thermocouple Input Module w/Modbus
- **ADAM-4019+-F** 8-ch Universal Analog Input Module w/Modbus

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[70L-OAC-L](#) [G21960000700](#) [G34960002700](#) [G88104401](#) [IDC-5B](#) [OACU](#) [C4SWOUT](#) [FC6A-T32K3](#) [SNAP-OAC5MA](#) [FC6A-N16B3](#)  
[FC6A-N32B3](#) [FC6A-T16P3](#) [G3TAOD201SDC24](#) [PB32HQ](#) [PB16T](#) [PB8](#) [PB8H](#) [C200H-OD211](#) [GT1-AD04CST](#) [GT1-DA04](#) [70GRCQ24-](#)  
[HS](#) [M-OAC5](#) [G4OAC24AMA](#) [2736505](#) [6202](#) [6402](#) [IL MOD BK DI8 DO4-PAC](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-N08A11](#) [FC6A-M24BR1](#)  
[FC6A-K4A1](#) [FC6A-T32P3](#) [9-1393028-2](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [WISE-4050/LAN-B](#) [WISE-S614T-A](#) [ADAM-4068-C](#)  
[56475](#) [ADAM-4017+-F](#) [ADAM-4118-C](#) [AMAX-4856-B](#) [WISE-4050-B](#) [ADAM-4051-C](#) [ADAM-4053-F](#) [GT1-AD08MX](#) [TM5SDO6TBFS](#)  
[70Q3446](#)