


ADAM-4050 ADAM-4051 ADAM-4052

15-ch Digital I/O Module
16-ch Isolated Digital Input Module with Modbus

8-ch Isolated Digital Input Module



ADAM-4050

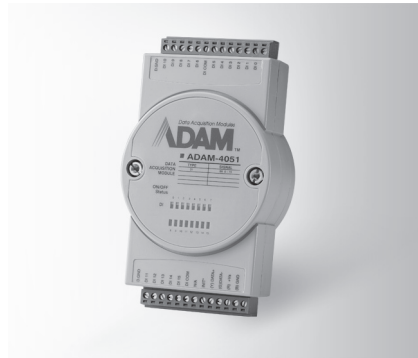

ADAM-4051



ADAM-4052



Specifications

General

- **Certification** FCC, CE, UL
- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Power Consumption** 0.4 W @ 24 V_{DC}
- **Watchdog Timer** System (1.6 second)
- **Supported Protocols** ASCII command

Digital Input

- **Channels** 7
- **Input Level** Logic level 0: 1 V max.
Logic level 1: 3.5 ~ 30 V
Pull up current: 0.5 mA,
10 kΩ resistor to 5 V

Digital Output

- **Channels** 8
open collector to 30 V,
30 mA max. load
- **Power Dissipation** 300 mW

Specifications

General

- **Certification** FCC, CE, UL, UL Class I Division 2
- **Connectors** 2 x plug-in terminal blocks (#14 ~ 28 AWG)
- **Power Consumption** 1 W @ 24 V_{DC}
- **Watchdog Timer** System (1.6 second)
- **Supported Protocols** ASCII command and Modbus/RTU

LED Indicators

- **LED Indicators** Yes

Digital Input

- **Channels** 16
- **Input Voltage** 50 V max
- **Input Level**
Dry contact: Logic level 0: open
Logic level 1: close to GND
Wet contact: Logic level 0: 3 V max
Logic level 1: 10 ~ 50 V
(Note: Digital Input levels 0 and 1 can be inverted)
- **Isolation Voltage** 2,500 V_{DC}
- **Input Resistance** 5.2 kΩ
- **Overvoltage Protection** 70 V_{DC}

Specifications

General

- **Certification** FCC, CE, UL
- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Power Consumption** 0.4 W @ 24 V_{DC}
- **Watchdog Timer** System (1.6 second)
- **Supported Protocols** ASCII command

Digital Input

- **Channels** 8
(6 fully independent isolated channels, 2 isolated channels with common ground)
- **Input Level** Logic level 0: 1 V max.
Logic level 1: 3 ~ 30 V
- **Isolation Voltage** 5,000 V_{RMS}
- **Input Resistance** 3 kΩ

Common Specifications

General

- **Power Input** Unregulated 10 ~ 30 V_{DC}

Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Ordering Information

- **ADAM-4050** 15-ch Digital I/O Module
- **ADAM-4051** 16-ch Isolated Digital Input Module with Modbus
- **ADAM-4052** 8-ch Isolated Digital Input Module

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [FC6A-N32B3](#) [70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#) [70MRCK24-DIN](#) [6202](#) [6402](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-S614-A](#) [ADAM-5051S-AE](#)