

# ADAM-4510I


# ADAM-4520I

# ADAM-4117

## Robust RS-422/485 Repeater

## Robust RS-232 to RS-422/485 Converter

## Robust 8-ch Analog Input Module with Modbus

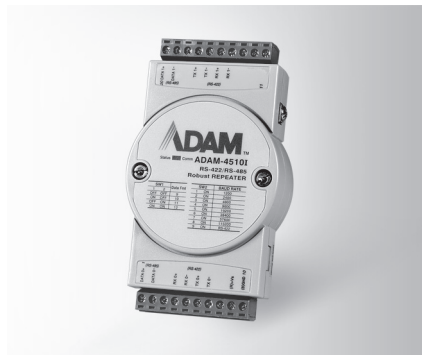

ADAM-4510I



ADAM-4520I



ADAM-4117



### Specifications

#### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Power Consumption** 1.4 W @ 24 V<sub>DC</sub>

#### Communications

- **Input** RS-485 (2-wire) or RS-422 (4-wire)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)
- **Supports Auto Baud-Rate**
- **Provide RS-485 to RS-422 Convert Ability**

### Specifications

#### General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG) (RS-422/485)  
1 x DB9-F (RS-232)
- **Power Consumption** 1.2 W @ 24 V<sub>DC</sub>

#### Communications

- **Input** RS-232 (DB9)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)
- **Supports Auto Baud-Rate**

### Specifications

#### General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG)
- **Watchdog Timer** System (1.6 second) & Communication
- **Supported Protocols** ASCII Command and Modbus/RTU
- **Power Consumption** 1.2 W @ 24 V<sub>DC</sub>
- **Interface (B version)** RS-485, micro USB

#### Analog Input

- **Channels** 8 differential and independent configuration channels
- **Input Impedance** Voltage: 800 K $\Omega$   
Current: 120  $\Omega$
- **Input Type** mV, V (supports unipolar and bipolar), mA
- **Input Range** 0 ~ 150mV, 0 ~ 500mV, 0 ~ 1V, 0 ~ 5V, 0 ~ 10V, 0 ~ 15V,  $\pm$ 150 mV,  $\pm$ 500 mV,  $\pm$ 1V,  $\pm$ 5 V,  $\pm$ 10 V,  $\pm$ 15V,  $\pm$ 20 mA, 0 ~ 20 mA, 4 ~ 20mA
- **Accuracy** Voltage mode :  $\pm$ 0.1% or better  
Current mode :  $\pm$ 0.2% or better
- **Resolution** 16-bit
- **Sampling Rate** 10/100 samples/sec (selected by utility)
- **CMR @ 50/60 Hz** 92 dB
- **NMR @ 50/60 Hz** 60 dB
- **Over Voltage Protection**  $\pm$ 60 V<sub>DC</sub>
- **High Common Mode** 200 V<sub>DC</sub>
- **Span Drift**  $\pm$ 25 ppm/ $^{\circ}$ C (Typical)
- **Zero Drift**  $\pm$ 6 $\mu$ V/ $^{\circ}$ C
- **Built-in TVS/ESD Protection**

### Common Specifications

#### General

- **Certification** FCC, CE, UL, UL Class I, Division 2, Groups A,B,C,D Hazardous Location
- **Power Input** Unregulated 10 ~ 48 V<sub>DC</sub> w/power reversal protection
- **Isolation Voltage** 3,000 V<sub>DC</sub>

#### Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** - 40 ~ 85 $^{\circ}$ C (-40 ~ 185 $^{\circ}$ F)
- **Storage Temperature** - 40 ~ 85 $^{\circ}$ C (-40 ~ 185 $^{\circ}$ F)
- **Supports Noise Rejection**

### Ordering Information

- **ADAM-4510I** Robust RS-422/485 Repeater
- **ADAM-4520I** Robust RS-232 to RS-422/485 Converter
- **ADAM-4117** Robust 8-ch Analog Input Module with Modbus

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [I/O Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [FC6A-N32B3](#) [70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#) [70MRCK24-DIN](#) [6202](#) [6402](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-S614-A](#) [ADAM-5051S-AE](#)