

ADAM-4510/S

ADAM-4520

ADAM-4521


RS-422/485 Repeater

Isolated RS-232 to RS-422/485 Converter

Addressable RS-422/485 to RS-232 Converter



ADAM-4510/4510S FCC CE RoHS COMPLIANT 2002/95/EC

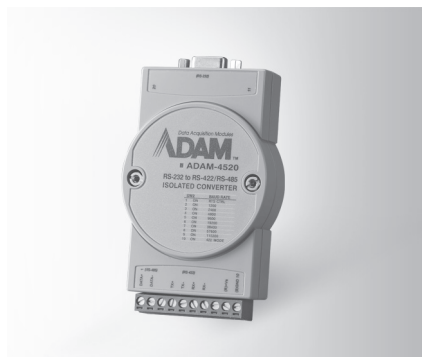

ADAM-4520 FCC CE RoHS COMPLIANT 2002/95/EC



ADAM-4521 UL US LISTED ENEC RoHS COMPLIANT 2002/95/EC

Specifications

General

- **Connectors** 2 x plug-in terminal blocks (#14 ~ 22 AWG) (RS-422/485)
- **Isolation Voltage** 3,000 V_{DC} (ADAM-4510S)
- **Power Consumption** ADAM-4510
Typical: 1.1 W @ 24 V_{DC}
Max.: 1.2 W @ 24 V_{DC}
ADAM-4510S
Typical: 1.5 W @ 24 V_{DC}
Max.: 1.6 W @ 24 V_{DC}

Serial Communications

- **Input** RS-485 (2-wire) or RS-422 (4-wire)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)

Specifications

General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG) (RS-422/485)
1 x DB9-F (RS-232)
- **Isolation Voltage** 3,000 V_{DC}
- **Power Consumption** Typical: 0.8 W @ 24 V_{DC}
Max.: 1 W @ 24 V_{DC}

Serial Communications

- **Input** RS-232 (DB9)
- **Output** RS-485 (2-wire) or RS-422 (4-wire)
- **Speed Modes (bps)** 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k, RTS control and RS-422 (switchable)

Specifications

General

- **Connectors** 1 x plug-in terminal block (#14 ~ 22 AWG) (RS-422/485)
1 x DB9-F (RS-232)
- **Isolation Voltage** 1,000 V_{DC}
- **Power Consumption** 1.0 W @ 24 V_{DC}
- **Built-in microprocessor and watchdog timer**

Serial Communications

- **Input** RS-485 (2-wire) or RS-422 (4-wire)
- **Output** RS-232 (DB9)
- **Speed Modes (bps)** 300, 600, 1,200, 2,400, 4,800, 9,600, 19.2 k, 38.4 k, 57.6 k, 115.2 k (software configurable)
- **RS-232 and 485 can be set to different baudrates**
- **RS-485 surge protection and automatic RS-485 data flow control**
- **Software configurable to either addressable or non-addressable mode**

Common Specifications

General

- **Power Input** Unregulated 10 ~ 30 V_{DC} w/ power reversal protection

Environment

- **Operating Humidity** 5 ~ 95% RH
- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
- **Storage Temperature** -25 ~ 85°C (-13 ~ 185°F)

Ordering Information

- **ADAM-4510** RS-422/485 Repeater
- **ADAM-4510S** Isolated RS-422/485 Repeater
- **ADAM-4520** Isolated RS-232 to RS-422/485 Converter
- **ADAM-4521** Addressable RS-422/485 to RS-232 Converter

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Interface Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[FAB118](#) [60003-002](#) [FC6A-PC3](#) [60016-023](#) [HPCI-14S12U](#) [cBP-3208](#) [PCE-DP10-00A1E](#) [60016-024](#) [60016-022](#) [60016-005](#) [60016-002](#)
[60006-004](#) [K6CMISZBI52](#) [60011-093](#) [ADAM-4541-C](#) [ADAM-4510S-F](#) [ADC-30AB](#) [BBA](#) [USB-CARD-READER](#) [USB-RS485](#) [USB-SATA](#)
[112095-5118](#) [1020882](#) [1021056](#) [1021058](#) [1021080](#) [73-544-002](#) [UC-313](#) [UC-357](#) [485LDRC9](#) [485OPDRI](#) [U442-DOCK1](#) [UH104](#) [US-257](#)
[VESP211-232](#) [422LP9R](#) [422PP9R](#) [422PP9TB](#) [4850PDRHS](#) [US-279](#) [HW-FMC-XM105-G](#) [HP-USB-14](#) [UEXTX5](#) [2316379](#) [2316382](#) [B126-](#)
[1A1](#) [2465](#) [301-1001-11](#) [301-1001-31](#) [301-1002-98](#) [U444-06N-DP-C](#)