


ADAM-6015


ADAM-6017

ADAM-6018

7-ch Isolated RTD Input Modbus TCP Module
8-ch Isolated Analog Input Modbus TCP Module with 2-ch DO
8-ch Isolated Thermocouple Input Modbus TCP Module with 8-ch DO

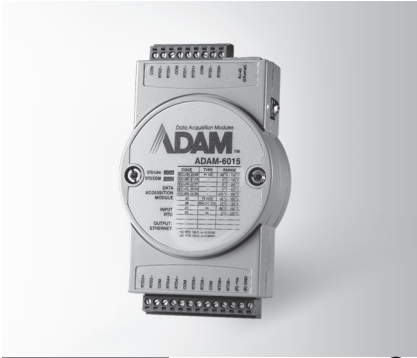

ADAM-6015 FCC CE RoHS UL LISTED E129381 E.T.C.

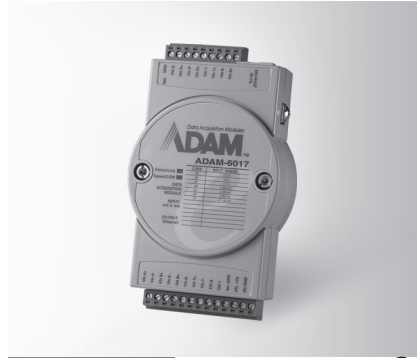

ADAM-6017 FCC CE RoHS UL LISTED E129381 E.T.C.



ADAM-6018 FCC CE RoHS UL LISTED E129381 E.T.C.

Specifications

Analog Input

- **Channels** 7 (differential)
- **Input Impedance** > 10 M Ω
- **Input Connections** 2 or 3 wire
- **Input Type** Pt, Balco and Ni RTD
- **RTD Types and Temperature Ranges**
 - Pt 100 -50°C ~ 150°C
 - 0°C ~ 100°C
 - 0°C ~ 200°C
 - 0°C ~ 400°C
 - 200°C ~ 200°C
 - Pt 1000 -40°C ~ 160°C
- Supports both IEC 60751 ITS90 (0.0385 W/W/°C) and JIS C 1604 (0.0392 W/W/°C)
- Balco 500 -30°C ~ 120°C
- Ni 518 -80°C ~ 100°C
- 0°C ~ 100°C
- **Accuracy** $\pm 0.1\%$ or better
- High speed mode $\pm 0.5\%$ or better
- **Span Drift** ± 25 ppm/°C
- **Zero Drift** ± 6 μ V/°C
- **Resolution** 16-bit
- **Sampling Rate** 10 sample/ second (total)
- High speed mode: 1K sample/second (total)
- CMR @ 50/60 HZ 90dB
- NMR @ 50/60 HZ 60dB
- * high speed mode does not support CMR/NMR
- **Wire Burn-out Detection**

Ordering Information

- **ADAM-6015** 7-ch Isolated RTD Input Modbus TCP Module

Specifications

Analog Input

- **Channels** 8 (differential)
- **Input Impedance** > 10 M Ω (voltage)
120 Ω (current)
- **Input Type** mV, V, mA
- **Input Range** ± 150 mV, ± 500 mV, ± 1 V, ± 5 V, ± 10 V, 0-150mV, 0-500mV, 0-1V, 0-5V, 0-10V, 0-20mA, 4-20mA, ± 20 mA
- **Accuracy** $\pm 0.1\%$ (voltage)
 $\pm 0.2\%$ (current)
- **Span Drift** ± 25 ppm/°C
- **Zero Drift** ± 6 μ V/°C
- **Resolution** 16-bit
- **Sampling Rate** 10 or 100 sample/ second (total)
- CMR @ 50/60 HZ 90dB
- NMR @ 50/60 HZ 67dB
- **Common-Mode Voltage** 350V_{DC}
- **Digital Output**
- **Channels** 2, open collector to 30 V, 100 mA max. load
- **Power Dissipation** 300 mW for each module
- **Output Delay** On: 100 μ s
Off: 150 μ s

Ordering Information

- **ADAM-6017** 8-ch Isolated AI with 2-ch DO Modbus TCP Module

Specifications

Analog Input

- **Channels** 8 (differential)
- **Input Impedance** > 10 M Ω
- **Input Type** Thermocouple
- **Thermocouple Type and Range:**

J	0 ~ 760°C	R	500 ~ 1,750°C
K	0 ~ 1,370°C	S	500 ~ 1,750°C
T	-100 ~ 400°C	B	500 ~ 1,800°C
E	0 ~ 1,000°C		
- **Accuracy** $\pm 0.1\%$
- **Span Drift** ± 25 ppm/°C
- **Zero Drift** ± 6 μ V/°C
- **Resolution** 16-bit
- **Sampling Rate** 10 sample/ second (total)
- CMR @ 50/60 HZ 90dB
- NMR @ 50/60 HZ 60dB
- **Wire Burn-out Detection**

Digital Output

- **Channels** 8, open collector to 30 V, 100 mA max. load
- **Power Dissipation** 300 mW for each module

Ordering Information

- **ADAM-6018** 8-ch Isolated Thermocouple Input Modbus TCP Module w/ 8-ch DO

Common Specifications

General

- **LAN** 10/100Base-T(X)
- **Power Consumption** 2.5 W @ 24 V_{DC} (ADAM-6015)
2.7 W @ 24 V_{DC} (ADAM-6017)
2 W @ 24 V_{DC} (ADAM-6018)
- **Connectors** 1 x RJ-45 (LAN), Plug-in screw terminal block (I/O and power)
- **Watchdog** System (1.6 second) and Communication (programmable)

- **Power Input** 10 ~ 30 V_{DC}
- **Supports Peer-to-Peer**
- **Supports GCL**
- **Supports Modbus/TCP, TCP/IP, UDP and HTTP Protocols**
- **Protection**
- **Over Voltage Protection** ± 35 V_{DC}
- **Isolation Protection** 2,000 V_{DC}
- **Built-in TVS/ESD Protection**
- **Power Reversal Protection**

Environment

- **Operating Temperature** -10 ~ 70°C (14 ~ 158°F)
-20 ~ 70°C (-4 ~ 158°F) (ADAM-6017)
- **Storage Temperature** -20 ~ 80°C (-4 ~ 176°F)
-30 ~ 80°C (-22 ~ 176°F) (ADAM-6017)
- **Operating Humidity** 20 ~ 95% RH (non-condensing)
- **Storage Humidity** 0 ~ 95% RH (non-condensing)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#)
[G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#)
[70MRCK24-DIN](#) [6202](#) [6402](#) [PI/NI-2D/24](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#)
[84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-S614-A](#) [C200H-OD211](#)