

ADAM-6717

ADAM-6750

ADAM-6760D

Intelligent I/O Gateway with Analog Input

Intelligent I/O Gateway with Digital I/O
Intelligent I/O Gateway with Solid-State Relay Output (for DC)



ADAM-6717

Specifications

Analog Input

- **Channels** 8 (differential)
- **Sampling Rate** 10 or 100 samples/ second (total)
- **Resolution** 16 bits
- **Input Range** 0 ~ 150mV, 0 ~ 500mV, 0 ~ 1V, 0 ~ 5V, 0 ~ 10V, ±150 mV, ±500 mV, ±1V, ±5 V, ±10 V, ±20 mA, 0 ~ 20 mA, 4 ~ 20mA

Digital Output

- **Channels** 4
- **Output type** Sink 30 V_{DC}, 0.1A max. per channel

Digital Input

- **Channels** 5
- **Dry contact** logic 0: Open
logic 1: Close to ground
- **Wet contact** logic 0: 0 ~ 3 V_{DC}
logic 1: 10 ~ 30 V_{DC}



ADAM-6750


Specifications

Digital Input

- **Channels** 12 support 3KHz counter input
- **Dry contact** logic 0: Open
logic 1: Close to ground
- **Wet contact** logic 0: 0 ~ 3 V_{DC}
logic 1: 10 ~ 30 V_{DC}

Digital Output

- **Channels** 12 (support 3KHz pulse output)
- **Output type** Sink 30 V_{DC}, 0.1A max. per channel

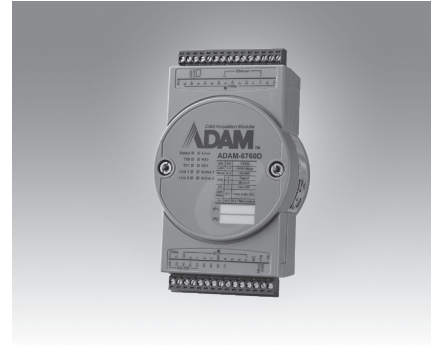

ADAM-6760D

Specifications

Digital Input

- **Channels** 8 support 3KHz counter input
- **Dry contact** logic 0: Open
logic 1: Close to ground
- **Wet contact** logic 0: 0 ~ 3 V_{DC}
logic 1: 10 ~ 30 V_{DC}

Relay Output (PhotoMOS SPST)

- **Channels** 8 (Form A)
- **Contact rating (Resistive and Inductive load)** 30 V_{DC}
1 A @25°C
0.7A @70°C
- **Relay-on time** 1.3 ms
- **Relay-off time** 0.8 ms
- **Insulation (Relay output to power)** 1500Vrms
- **Peak Load Current** 4A (100ms (1 pulse))
- **Total Power Dissipation** 400mW / channel
- **On-state resistance** 0.5Ω

Common Specifications

General

- **MCU** Cortex-A8 32-Bit 1GHz
- **Memory** DDR3L 512MB
- **Storage** NAND flash 512MB for system storage
microSD Slot (Optional)
- **OS** RT Linux V3.12
- **Programming** Node-RED Linux C
- **Power input** 10 ~ 30 V_{DC}

- **Operation temperature** -40 ~ 70°C
- **Storage temperature** -40 ~ 85°C
- **Isolation** 2500 V_{DC}

Communication

- **LAN port** 2 x RJ-45 10/100 Mbps (2MAC ID)
- **Serial port** 2 x RS-485
- **USB port** 1 x USB Type-A 2.0,
1 x USB Micro-B 2.0

Ordering information

- **ADAM-6717-A** Intelligent I/O Gateway with Analog Input
- **ADAM-6750-A** Intelligent I/O Gateway with Digital I/O
- **ADAM-6760D-A** Intelligent I/O Gateway with Solid-State Relay Output (for DC)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Gateways category](#):

Click to view products by [Advantech manufacturer](#):

Other Similar products are found below :

[BB-SG30000324-51](#) [MTCDDT-LEU1-247A-915-EU-GB-AU](#) [MTCDDTIP-LEU1-275L-868](#) [MTCDDT-LEU1-246A-868-EU-GB](#) [WOP-2000G-N2AE](#) [ESRP-PCS-ECU1251](#) [BB-SG30300525-42](#) [BB-SG30500520-42](#) [TRB140003000](#) [ECU-1051TL-R10AAE](#) [ECU-1251TL-R10AAE](#) [SGX5150202US](#) [SGX5150102US](#) [RG191](#) [UPS-EDGE-X70864-U01](#) [UPS-EDIOT-X70864-UW01](#) [ADAM-4572-CE](#) [ADAM-6717-A](#) [ECU-1152-R11ABE](#) [EKI-1222-CE](#) [EKI-1224-CE](#) [EKI-1224CI-CE](#) [ICR-3211B](#) [ICR-3241W](#) [UNO-220-P4N1AE](#) [UNO-2271G-W1032GE](#) [WISE-3310-D100L1E](#) [WISE-3610ILS-51A1N](#) [WISE-6610-N100-A](#) [AKX00016](#) [MESR901](#) [MESR902T](#) [X2-HMU-EM-B](#) [X4-Z1U-B101-A](#) [SGX5150020US](#) [SGX51501M2ES](#) [SGX51502N5ES](#) [XPC240200B-02](#) [XPC240100S-02](#) [XPC240200S-02](#) [XPC240400S-02](#) [XPC250100S-02](#) [WSDA-2000](#) [WSDA-200-USB](#) [1120780001](#) [1120780002](#) [MTCDDT-246A-868-EU-GB](#) [MTCDDT-247A-868-EU-GB](#) [MTCDDT-L4N1-247A-915-US](#) [ARGN-H](#)