


AMAX-4817


AMAX-4820

8-Channel, 16-Bit Isolated Analog Input EtherCAT Remote I/O Module

4-Channel, 16-Bit Isolated Analog Output EtherCAT Remote I/O Module

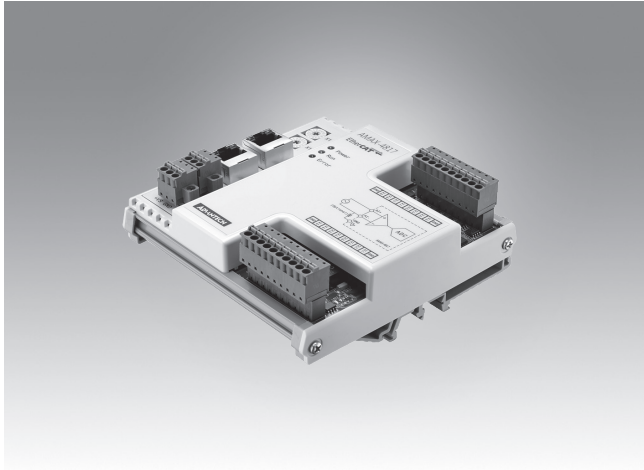

AMAX-4817

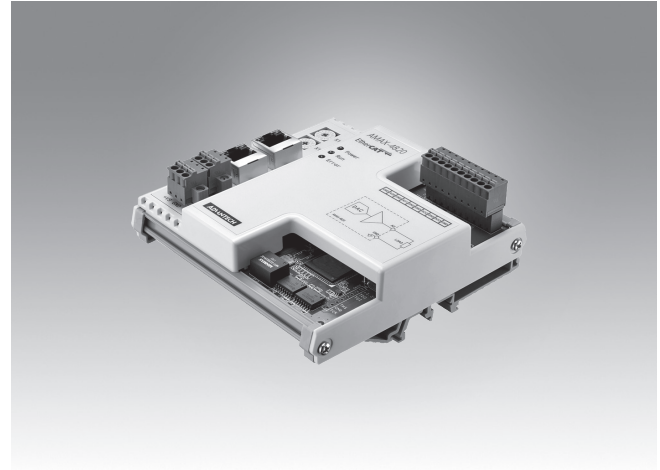

AMAX-4820



Features

- Suitable for EtherCAT networks
- 8 x 16-bit analog input channels with 2,500 V_{DC} isolation
- Wide common-mode voltage range (± 275 V)
- Removable European-type connector
- Supports EtherCAT distributed clocks (DC) mode and SyncManager mode
- 2 x Rotating switches that support up to 256 slave IDs

Introduction

AMAX-4817 is an industrial-grade remote I/O slave module equipped with the EtherCAT protocol. European-type pluggable terminal blocks facilitate module setup and maintenance, while the compact size and support for DIN-rail mounting ensure easy installation in cabinet configurations. For safe and reliable operation, all of the 8 analog input channels are protected by a 2,500 V_{DC} isolation circuit.

Specifications

Communication

- **Interface** EtherCAT
- **Data Transfer Medium** Ethernet/EtherCAT cable (min. CAT 5), shielded
- **Distance Between Modules** Max. 100 m (100BASE-TX)
- **Communication Cycle Time** 100 μ s (guarantees all channel data are updated)
- **Data Transfer Rates** 100 Mbps

Analog Input

- **Channels** 8
- **Resolution** 16 bits
- **Input Voltage Range** 0 – 10 V, ± 10 V
- **Common-Mode Voltage Range** ± 275 V
- **Measurement Error** $< \pm 0.1\%$
- **Isolation Protection** 2,500 V_{DC}
- **Conversion Time** 40 μ s for all channels

Note: Because the analog sampling rate exceeds the communication cycle time, the maximum polling rate will be limited by the communication cycle time = 10 kS/s for each channel.

General

- **Connectors** 2 x 10-pin terminal block (I/O), 3.81 mm
1 x 3-pin screw terminal block (power), 3.81 mm
2 x RJ-45 (EtherCAT)
- **Dimensions** 120 x 120 x 40 mm (4.72 x 4.72 x 1.57 in)
- **Operating Temperature** -20 – 60 °C (-4 – 140 °F)
- **Storage Temperature** -40 – 70 °C (-40 – 158 °F)
- **Storage Humidity** 5 – 95% RH (non-condensing)
- **Power Supply** 10 – 30 V_{DC}
- **Power Consumption** Typical 160 mA @24 V; Max. 190 mA @24 V

Ordering Information

- **AMAX-4817-AE** 8-ch, 16-bit isolated AI EtherCAT remote I/O module
- **96PSD-A40W24-MM** DIN rail A/D 100 – 240 V, 40 W, 24 V

Features

- Suitable for EtherCAT networks
- 4 x 16-bit analog output channels with 2,500 V_{DC} isolation
- Multiple voltage and current output ranges
- Removable European-type connector
- Supports EtherCAT distributed clocks (DC) mode and SyncManager mode
- 2 x Rotating switches that support up to 256 slave IDs

Introduction

AMAX-4820 is an industrial-grade remote I/O slave module equipped with the EtherCAT protocol. European-type pluggable terminal blocks facilitate module setup and maintenance, while the compact size and support for DIN-rail mounting ensure easy installation in cabinet configurations. For safe and reliable operation, all of the 4 analog output channels are protected by a 2,500 V_{DC} isolation circuit.

Specifications

Communication

- **Interface** EtherCAT
- **Data Transfer Medium** Ethernet/EtherCAT cable (min. CAT 5), shielded
- **Distance Between Modules** Max. 100 m (100BASE-TX)
- **Communication Cycle Time** 100 μ s (guarantees all channel data are updated)
- **Data Transfer Rates** 100 Mbps

Analog Output

- **Channels** 4
- **Resolution** 16 bits
- **Output Voltage Range** 0 – 5 V, 0 – 10 V, ± 5 V, ± 10 V
- **Output Current Range** 0 – 20 mA, 4 – 20 mA
- **Load** > 1 k Ω (voltage output)
< 625 Ω (current output)
- **Output Error** $< \pm 0.1\%$
- **Isolation Protection** 2,500 V_{DC}
- **Conversion Time** 40 μ s for all channels

General

- **Connectors** 1 x 10-pin terminal block (I/O), 3.81 mm
1 x 3-pin screw terminal block (power), 3.81 mm
2 x RJ-45 (EtherCAT)
- **Dimensions** 120 x 120 x 40 mm (4.72 x 4.72 x 1.57 in)
- **Operating Temperature** -20 – 60 °C (-4 – 140 °F)
- **Storage Temperature** -40 – 70 °C (-40 – 158 °F)
- **Storage Humidity** 5 – 95% RH (non-condensing)
- **Power Supply** 10 – 30 V_{DC}
- **Power Consumption** Typical 160 mA @24 V; Max. 190 mA @24 V

Ordering Information

- **AMAX-4820-AE** 4-ch, 16-bit isolated AO EtherCAT remote I/O module
- **96PSD-A40W24-MM** DIN rail A/D 100 – 240 V, 40 W, 24 V

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [FC6A-N32B3](#) [70MRCQ32-HL](#) [C200H-LK201-V1](#) [G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#) [70MRCK24-DIN](#) [6202](#) [6402](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-S614-A](#) [ADAM-5051S-AE](#) [WISE-4012-AE](#) [WISE-4060-B](#)