

AMAX-4830


AMAX-4833

AMAX-4834

16-ch Isolated Digital Input and 16-ch Isolated Digital Output EtherCAT Remote I/O Module

32-ch Isolated Digital Input EtherCAT Remote I/O Module

32-ch Isolated Digital Output EtherCAT Remote I/O Module

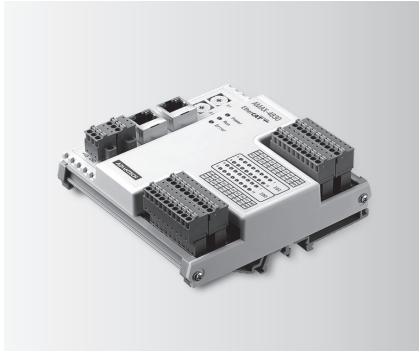

AMAX-4830



Features

- Suitable for EtherCAT networks
- 16-ch digital input and 16-ch digital output with 2,500 V_{DC} isolation
- Wide input voltage range (10 ~ 30 V_{DC})
- Wide output voltage range (5 ~ 40 V_{DC}) and high output current (350 mA/ch)
- Quick removable European type connector
- LED indicators for I/O status
- Supports EtherCAT Distributed Clock (DC) mode and SyncManager mode
- Two Rotary switches for up to 256 slave IDs

Introduction

The AMAX-4830 is an industrial EtherCAT slave module equipped with the EtherCAT protocol. Its compact size and DIN-rail mount kit can install easily in a cabinet. Euro type pluggable terminal blocks and LED indicator help users to maintain and set up their system. All digital input and digital output channels are protected by 2,500 V DC isolation.

Specifications

Communication

▪ Interface	EtherCAT
▪ Data transfer medium	Ethernet/EtherCAT cable (min. CAT 5), shielded
▪ Distance between modules	Max. 100 m (100BASE-TX)
▪ Communication Cycle Time	200µs
▪ Data transfer rates	100 Mbps
▪ Configuration	Not required

Digital Input

▪ Channels	16
▪ Input voltage	Logic 0: 3 V max. Logic 1: 10 V min. (30 V max.)
▪ Isolation protection	2,500 V _{DC}

Digital Output


▪ Channels	16
▪ Load voltage	5 ~ 40 V _{DC}
▪ Load current	350mA/ch (sink) @ 25°C 250mA/ch (sink) @ 60°C
▪ Isolation protection	2,500 V _{DC}
▪ Opto-isolator Response Time	100µs

General

▪ Connectors	10-pin 3.81 mm terminal block * 4 (I/O) 3-pin 3.81 mm screw terminal block (power) RJ-45 * 2 (EtherCAT)
▪ Dimensions	120 mm x 120 mm x 40 mm
▪ Operating temperature	-20 ~ 60°C (32 ~ 140°F)
▪ Storage temperature	-40 ~ 70°C (-40 ~ 158°F)
▪ Storage humidity	5 ~ 95% RH (non-condensing)
▪ Power supply	10 ~ 30 V _{DC}
▪ Power Consumption	Typical 85mA @24V; Max. 110mA @24V

Ordering Information

▪ AMAX-4830-AE	16-ch isolated digital input and 16-ch isolated digital output EtherCAT remote I/O module
▪ 96PSD-A40W24-MM	DIN RAIL A/D 100-240V 40W 24V

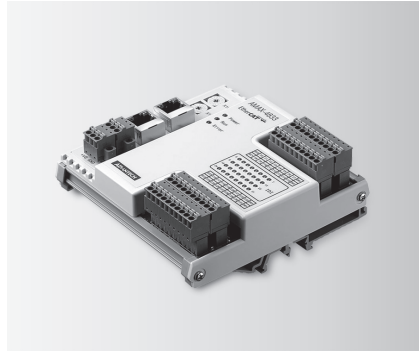

AMAX-4833



Features

- Suitable for EtherCAT networks
- 32-ch digital input with 2,500 V_{DC} isolation
- Wide input voltage range (10 ~ 30 V_{DC})
- Quick removable European type connector
- LED indicators for I/O status
- Supports EtherCAT Distributed Clock (DC) mode and SyncManager mode
- Two Rotary switches for up to 256 slave IDs

Introduction

The AMAX-4833 is an industrial EtherCAT slave module equipped with the EtherCAT protocol. Its compact size and DIN-rail mount kit can install easily in a cabinet. Euro type pluggable terminal blocks and LED indicator help users to maintain and set up their system. All digital input channels are protected by 2,500 V DC isolation.

Specifications

Communication

▪ Interface	EtherCAT
▪ Data transfer medium	Ethernet/EtherCAT cable (min. CAT 5), shielded
▪ Distance between modules	Max. 100 m (100BASE-TX)
▪ Data transfer rates	100 Mbps
▪ Configuration	Not required
▪ Communication Cycle Time	200µs

Digital Input


▪ Channels	32
▪ Input voltage	Logic 0: 3 V max. Logic 1: 10 V min. (30 V max.)
▪ Isolation protection	2,500 V _{DC}

General

▪ Connectors	10-pin 3.81 mm terminal block * 4 (I/O) 3-pin 3.81 mm screw terminal block (power) RJ-45 * 2 (EtherCAT)
▪ Dimensions	120 mm x 120 mm x 40 mm
▪ Operating temperature	-20 ~ 60°C (32 ~ 140°F)
▪ Storage temperature	-40 ~ 70°C (-40 ~ 158°F)
▪ Storage humidity	5 ~ 95% RH (non-condensing)
▪ Power supply	10 ~ 30 V _{DC}
▪ Power Consumption	Typical 85mA @24V; Max. 110mA @24V

Ordering Information

▪ AMAX-4833-AE	32-ch isolated digital input EtherCAT remote I/O module
▪ 96PSD-A40W24-MM	DIN RAIL A/D 100-240V 40W 24V

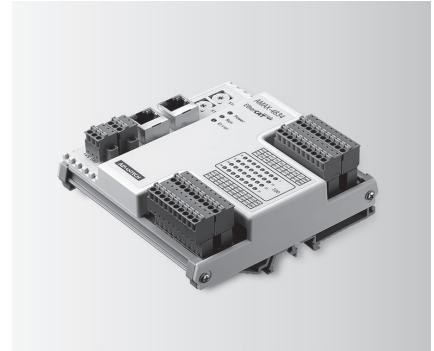

AMAX-4834



Features

- Suitable for EtherCAT networks
- 32-ch digital output with 2,500 V_{DC} isolation
- Wide output voltage range (5 ~ 40 V_{DC}) and high output current (350 mA/ch)
- Quick removable European type connector
- LED indicators for I/O status
- Supports EtherCAT Distributed Clock (DC) mode and SyncManager mode
- Two Rotary switches for up to 256 slave IDs

Introduction

The AMAX-4834 is an industrial EtherCAT slave module equipped with the EtherCAT protocol. Its compact size and DIN-rail mount kit can install easily in a cabinet. Euro type pluggable terminal blocks and LED indicator help users to maintain and set up their system. All digital output channels are protected by 2,500 V DC isolation.

Specifications

Communication

▪ Interface	EtherCAT
▪ Data transfer medium	Ethernet/EtherCAT cable (min. CAT 5), shielded
▪ Distance between modules	Max. 100 m (100BASE-TX)
▪ Data transfer rates	100 Mbps
▪ Configuration	Not required
▪ Communication Cycle Time	200µs

Digital Output

▪ Channels	32
▪ Load voltage	5 ~ 40 V _{DC}
▪ Load current	350mA/ch (sink) @ 25°C 250mA/ch (sink) @ 60°C
▪ Isolation protection	2,500 V _{DC}
▪ Opto-isolator Response Time	100µs

General

▪ Connectors	10-pin 3.81 mm terminal block * 4 (I/O) 3-pin 3.81 mm screw terminal block (power) RJ-45 * 2 (EtherCAT)
▪ Dimensions	120 mm x 120 mm x 40 mm
▪ Operating temperature	-20 ~ 60°C (32 ~ 140°F)
▪ Storage temperature	-40 ~ 70°C (-40 ~ 158°F)
▪ Storage humidity	5 ~ 95% RH (non-condensing)
▪ Power supply	10 ~ 30 V _{DC}
▪ Power Consumption	Typical 85mA @24V; Max. 110mA @24V

Ordering Information

▪ AMAX-4834-AE	32-ch isolated digital output EtherCAT remote I/O module
▪ 96PSD-A40W24-MM	DIN RAIL A/D 100-240V 40W 24V

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [I/O Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[70L-IDC5S](#) [70L-OAC-L](#) [70Z3289-4](#) [G21960000700](#) [G21960002700](#) [G34960002700](#) [OACU](#) [C4SWOUT](#) [PB16H](#) [G34960001700](#) [G3TA-OA101SZ-1](#) [DC24](#) [G77-S](#) [5607189](#) [DA5](#) [ODC-24A](#) [IDC5P](#) [FC6A-N16B1](#) [6421](#) [70MRCQ32-HL](#) [G3TAOD201SDC24](#) [C200H-LK201-V1](#)
[G3TA-OA202SZ-US](#) [DC12](#) [GT1-OD16](#) [GT1-AD04CST](#) [B7AM-6BS](#) [70GRCQ24-HS](#) [6422](#) [84110410](#) [GT1-OD16MX](#) [G7VC-OC16-B7](#)
[70MRCK24-DIN](#) [6202](#) [6402](#) [PI/NI-2D/24](#) [FC6A-J2C1](#) [FC6A-KC1C](#) [FC6A-R081](#) [FC6A-J8CU1](#) [GP32900003700](#) [641-480-5022](#) [PB16H](#)
[84145010](#) [84110210](#) [FRUSB1601](#) [PCL-720+-BE](#) [FRRJ451601](#) [AP24MX3DB25F](#) [ADAM-5053S-AE](#) [WISE-S614-A](#) [C200H-OD211](#)