

AVS-240

4U Intel® Xeon® E5-2400 Video Wall Controller, Supporting 8-output Video Wall



CE FCC


Features

- Validated by Matrox
- Support Mura Card : 2 Mura MPX-4/4 and 1 Mura MPX-V16
- Maximum Video Input: 8 Analog/Digital
- Maximum Video Output: 8 Analog/Digital
- Processor: Intel Xeon E5-2400 series up to 8 cores/ 16 threads
- Memory : DDR3-1333/1600 MHz (ECC) U-DIMM and R-DIMM up to 96 GB
- Remote Management: IPMI, Advantech Remote Monitoring Utility


Specifications

Processor System	Chipset	Intel C602J Chipset	
	CPU	Intel LGA1356 Xeon E5-2400 Single processor (up to 95W TDP)	
	L2 Cache	20/15/10 MB	
	Front Side Bus	-	
	Memory	ECC & Register or ECC or non ECC DDR3 1600/1333/1066 MHz UDIMMs, maximum 96 GB	
Graphics	Controller	Aspeed AST2300 (Needs being disabled when Mura MPX is installed)	
	VRAM	64 MB	
Expansion Slot	PCIe x16 (Gen 3.0)	16.0 GB/s per direction, 1 slot (For Mura MPX installation)	
	PCIe x8 (Gen 3.0)	8.0 GB/s per direction, 1 slot (For Mura MPX installation)	
	PCIe x4 (Gen 2.0)	2.0 GB/s per direction, 1 slot (For Mura MPX-V8/V16 installation)	
	PCIe x1 (Gen 2.0)	500 MB/s per direction, 1 slot	
	PCI	32 bit/33 MHz, 2 slots	
Drive Bay	5.25" Front-Accessible	3	
	3.5" (Front Accessible)	1	
	3.5" Internal	-	
Ethernet	Interface	Dual 10/100/1000 Mbps Gigabit Ethernet	
	Controller	Intel 82579LM + Intel 82574L	
Front I/O Interface	USB	2 x USB2.0	
	PS/2	1	
Rear I/O Interface	USB	4 x USB2.0	
	PS/2	2	
	COM	1	
	Display	1 x VGA	
	Parallel	-	
	RJ-45	2	
Watchdog Timer	Output	Interrupt, system reset	
	Interval	Programmable, 1~255 sec/min	
Power Supply	Power Output Wattage	80+ Bronze 500W Single Power Supply	
	Input Range	AC 100 ~ 240 V	
Cooling	Chassis Fan	2 (12 cm / 85 CFM each)	
	Air Filter	Yes	
Miscellaneous	LED Indicators	Power status, HDD activity, Temperature, Fan, and Power voltage status	
	Remote Management	Advantech Remote Monitoring Utility	
Environment	Operating Temperature	0 ~ 40° C (32~104° F)	Non-Operating -20 ~ 60° C (-4 ~ 140° F)
	Humidity	10 ~ 85% @ 40° C	10 ~ 95% @ 40° C
	Vibration (5 ~ 500 Hz)	1 Grms	2 Grms
	Shock	10G (with 11ms duration, half since wave)	30G
	Physical Characteristics	Dimension	482 x 177 x 479 mm (19" x 7" x 18.9")


Dimensions

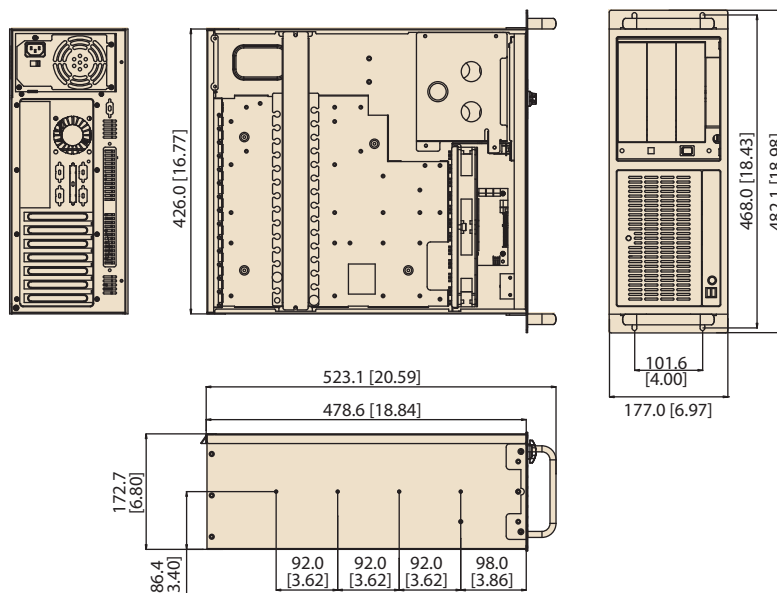

Front View

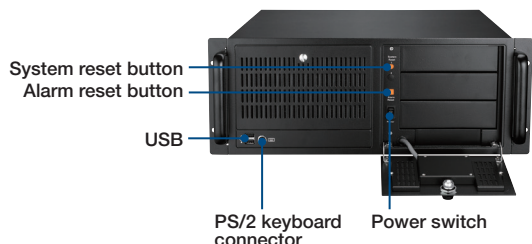

Rear View



Ordering Information

Advantech P/N	Description
AVS-240-00A1E	4U Rackmount Xeon E5-2400 Video Wall Controller Supporting Dual Matrox Mura MPX
1960055362N011	Cooler for Xeon E5-2400 series CPU with TDP Up To 95W

Note: Purchasing this CPU cooler is a must, other brand CPU cooler may result in compatibility issue.

Optional Parts

Item	Advantech P/N
Mobile rack for converting dual 5.25" drive bays to three 3.5" SAS/SATA HDD trays	IPC-DT-5230E
Mobile rack for converting a 3.5" drive bay to dual 2.5" SATA HDD trays	IPC-DT-3120E
Mobile rack for converting a 5.25" drive bay to four 2.5" SAS/SATA HDD trays	96RACK-5SS-CAGE-CR
SATA cable with lock	1700003194
ACP-4000 rail kit	9680006905
HD Audio-Card	PCA-AUDIO-HDA1E (Occupying 1 expansion slot)

Note:

- To support 2 2.5" SATA HDDs RAID with on-board RAID: 1700003194 x 2 + IDT-3120E x 1
- To support 3 3.5" SATA HDDs RAID with on-board RAID: 1700003194 x 3 + IDT-5230E x 1
- To support 4 2.5" SATA HDDs RAID with on-board RAID: 1700003194 x 4 + 96RACK-5SS-CAGE-CR x 1

System Contents

Items	Advantech P/N	Quantity
AVS-240 Bare-Bone System	N/A	1
Driver CD	2066820100	1

Note: CPU cooler needs to be purchased separately.

Compatible Processors

Advantech P/N	Description
96MPXE-1.8-15M13T	XEON 1.8G 15M 1356P 6CORE E5-2428L(G)- Sandy bridge
96MPXE-1.8-20M13T	XEON 1.8G 20M 1356P 8CORE E5-2448L(G)- Sandy bridge
96MPXE-2.0-10M13T	XEON 2.0G 10M 1356P 4CORE E5-2418L(G)- Sandy bridge

Validated Matrox Mura Cards

Advantech P/N	Model	Output	Input
96VG-2G-PE-MA	Mura MPX-4/0	4	0
96VG-2G-PE-MA1	Mura MPX-4/2	4	2
96VG-2G-PE-MA2	Mura MPX-4/4	4	4
96VG-1G-PE-MA	Mura MPX-SDI	2	2
96VG-128M-PE-MA	Mura MPX-V8	0	8
96VG-256M-PE-MA	Mura MPX-V16	0	16

Validated OS

Advantech P/N	OS for Embedded System
968QS28F08	Windows Server® 2008 with Hyper-V™ Standard 64 Bit
968QSV2845	Windows Server® 2008 without Hyper-V™ Standard 64 Bit
968QW7PROE	Windows® 7 Professional 64 Bit

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Embedded Box Computers](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#) [AIMB-](#)
[T1215DA-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#) [APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-](#)
[S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-10A1E](#) [ITA-1711-10A1E](#) [MIC-710AI-00A1](#) [MIC-720AI-00A1](#) [UNO-247-](#)
[J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#) [EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-92-](#)
[I7](#) [SI-606](#) [SI-60E](#) [TANK-760-HM86i-i5/4G-R10](#) [BKCM8i7CB8N](#)