


Stack Light Sensor Strip & Cable

with 3 photo-transistors

Model BB-WCD-LSSCBL

ADVANTECH

www.advantech.com

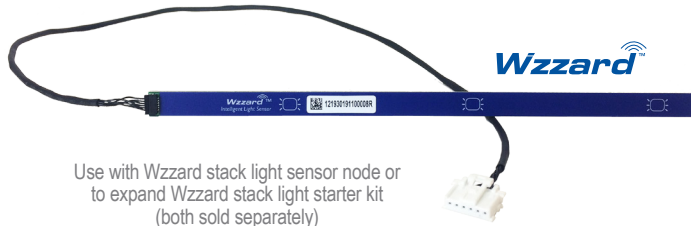

Use with Wzzard stack light sensor node or to expand Wzzard stack light starter kit (both sold separately)

KEY FEATURES

- Photo transistors convert stack lights into measurable, digital data
- No need to keep an eye or physical presence on the factory floor
- Increase productivity and efficiency, reduce downtime, free up manpower
- Molex connector with crimp terminal
- Non-intrusive, non-disruptive network overlay
- Aggressive, high temperature adhesive; removable at any time

OVERVIEW

The Wzzard™ light sensor, Model BB-WCD-LSSCBL, makes it fast and easy to get measurable data from your stack lights. Just peel and stick the sensor strip onto your stack light. (Cut away any sensors that you don't need.) Plug the cable into a wireless Wzzard stack light sensing node to transparently capture and network-enable digital data (nodes, gateways, kits sold separately).

WZZARD MESH SENSOR NETWORK

The Wzzard mesh sensing network is a non-intrusive overlay that doesn't interfere with your existing network, stack lights nor disrupt live operations. Remove, rearrange or add up to one hundred nodes, with a variety of sensors, at any time.

REAL-TIME MANAGEMENT

Get other tasks done while Wzzard sensors keep an eye on your stack lights and factory floor. Data is collected digitally for real-time management – no need to keep an eye on or manually record stack light activity.

OPERATIONS VISIBILITY

Digitized stack light data allows process and quality monitoring, generates email or SMS alerts, reduces downtime, replaces outdated data collection methods and frees up manpower.

Data can be published to a local web interface or forwarded to third-party software applications such as Azure, AWS, OSI PI, Kepware, Ignition or many others using MQTT.

DATA-DRIVEN DECISION MAKING

The most important upgrade to Industry 4.0 is data-driven dashboards that integrate OEE and MES to optimize equipment use and drive more informed management decisions.

ORDERING INFORMATION

MODEL NO.	DESCRIPTION
BB-WCD-LSSCBL	Light Sensor Strip & Cable with 3 photo transistors

ACCESSORIES – sold separately

- BB-WCD1H3001HP100 - Wzzard Mesh Wireless 802.15.4e Sensor Node
 - Commercial Stack Light Node for Light Sensing
 - 3 AI, vBat Out, Internal Antenna
 - Battery-powered, multi-year life.

Stack Light Monitoring Starter Kit

Everything you need to get started – easy to expand to more stack lights later.

- Model# BB-WSK-SLM-2
- 1 - Wzzard wireless stack light node (#BB-WCD1H3001HP100)
 - 1 - Stack Light Sensor Strip w/Cable (#BB-WCD-LSSCBL)
 - 1 - SmartSwarm 342 Gateway



All product specifications are subject to change without notice.
BB-WCD-LSSCBL_1619ds

ADVANTECH

orders@advantech-bb.com | eSales@advantech-bb.com

Headquarters: 707 Dayton Rd, PO Box 1040 Ottawa, IL 61350 USA (815)433-5100 or (800)346-3119/Toll Free Fax (815)433-5104
European Office: Westlink Commercial Pk, Oranmore Co. Galway Ireland +353 91 792444 Fax +353 91 792445

Stack Light Sensor Strip & Cable

with 3 photo-transistors

Model BB-WCD-LSSCBL




Stack light sensing, monitoring & reporting application

SPECIFICATIONS

GENERAL				
Circuit	PCB, FR4, 1 mm thick, ENIG plating			
PHOTO SENSOR				
Photo Transistor	(3) NPN silicon photo transistor			
Sensitivity	Wide angle, visible spectrum			
Regulatory	RoHS, lead-free			
PHOTO SENSOR - ABSOLUTE MAXIMUM RATINGS $T_A=25^{\circ}\text{C}$				
Parameter	Symbol	Value	Unit	Notice
Collector-Emitter Voltage	V_{ce0}	60	V	$I_{ce0} = 100\mu\text{A}$
Emitter-Collector Voltage	V_{eco}	4	V	$I_{eco} = 100\mu\text{A}$
Operating Temperature	T_{opr}	-40 to +85	$^{\circ}\text{C}$	-
Storage Temperature	T_{stg}	-40 to +85	$^{\circ}\text{C}$	-
MECHANICAL				
Sensor strip, dimensions	18.42L x 0.64W cm (7.25L x 0.25W in) Dome emboss over photo-transistors, PCB, etc.			
Cable	Discrete wires soldered to back side of PCB, 26AWG stranded, 45.7 cm (18 in)			
Connector	(1) Molex 513820600			
Connector Pins	(5) 561349000 pins			
Mounting Adhesive	3M 467, aggressive, high-temperature.			

MECHANICAL DRAWING - LIGHT SENSOR STRIP

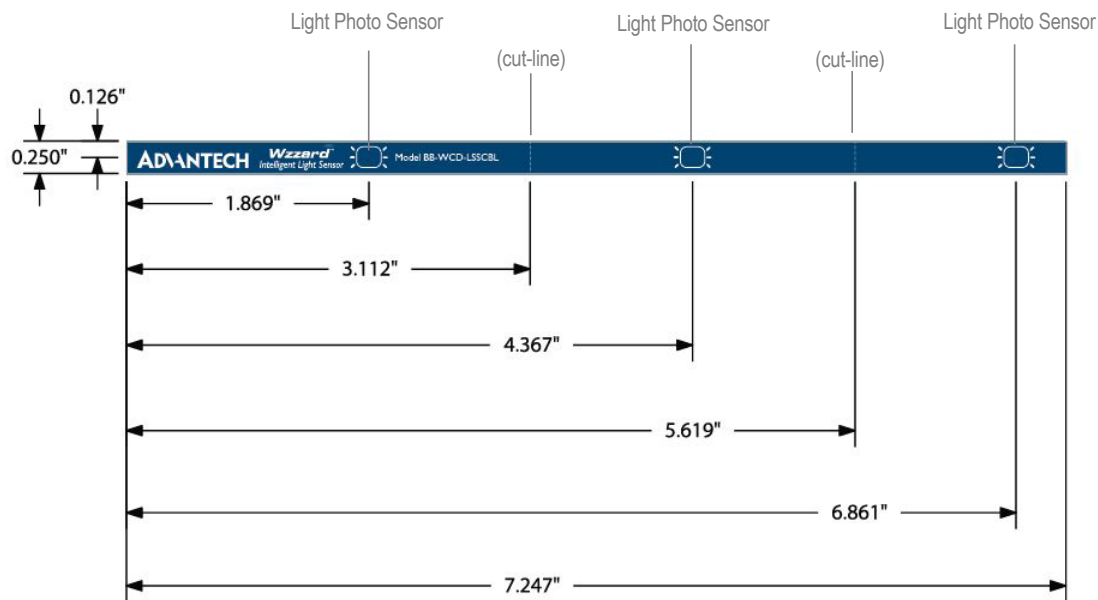

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Photoelectric Sensors](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[7442AD2X5FRX](#) [EX-19B-LP](#) [7443AR0X5FRX](#) [7452AD4D4NNX](#) [F3WD052C5M](#) [7655AR-04-F-1-2-RX](#) [7694ADE04DS2X](#) [FE7C-FRC6S-M](#) [PM-R24-R](#) [Q45VR2FPQ](#) [E3JUXM4MN](#) [E3S3LE21](#) [E3SCT11M1J03M](#) [E3VDS70C43S](#) [E3XNM16](#) [BR23P](#) [HOA6563-001](#) [OJ-3307-30N8](#) [OS-311A-30](#) [P34036](#) [P60001](#) [PB10CNT15PO](#) [S14132](#) [S52101](#) [S56258](#) [SH-21E](#) [SH-32R](#) [FD-SN500](#) [SU-79](#) [T36342](#) [T40300](#) [T60001](#) [PD60CNX20BP](#) [FX-302-HY](#) [PX-22](#) [PZ2-51P](#) [CYNUTX10](#) [UZB802](#) [UZB803](#) [UZFRG1](#) [UZFRG4](#) [UZFRT4](#) [UZFTT8](#) [ZX-XC4A4M](#) [E3D-R3Y1](#) [E3E23Y2US](#) [E3E-R1Y2](#) [E3SDS20E1](#) [E3TFD14N](#) [E3XR-CC4](#)