

# DS-570

## Intel® Celeron® N2930/J1900 Quad-Core™ SoC Fanless Signage Platform with Advanced NVIDIA® GeForce® GT 730M Graphics



### Features

- Intel® Celeron® N2930/J1900 quad-core™ SoC low-power fanless signage platform
- Integrated NVIDIA® GeForce® GT 730M graphics module for UHD/FHD playback
- Supports simultaneous multi-display output (up to 4 outputs)
- Compact size and mechanical design ensure convenient installation for field applications
- Internal mini PCIe interface enables easy expansion (e.g., WLAN, 3G, or TV tuner)
- 2 COM ports for system and application integration
- Built-in content management software for remote content editing, scheduling, and monitoring

Acronis


### Specifications

		DS-570GB/GF/GQ	DS-570GL	
Processor System	CPU	Intel® Celeron® N2930/J1900 quad-core™ 1.86 GHz/2.0 GHz processor	Intel® Celeron® N2930 quad-core™ 1.86 GHz processor	
	System Chipset	Integrated in CPU	Integrated in CPU	
	L2 Cache	2 MB	2 MB	
	BIOS	AMI uEFI 64-Mbit	AMI uEFI 64-Mbit	
Memory	Technology	2 x DDR3L 204-pin DIMM**	2 x DDR3L 204-pin DIMM**	
	Max. Capacity	8 GB (up to 4 GB per SODIMM)	8 GB (up to 4 GB per SODIMM)	
	Chipset	NVIDIA® GeForce® GT 730M	NVIDIA® GeForce® GT 730M	
Display	Memory Size	1024 MB of independent display memory	1024 MB of independent display memory	
	Resolution	VGA: up to 2048 x 1536 @ 60Hz HDMI: up to 3840 x 2160 @ 30Hz DP++: up to 3840 x 2160 @ 30Hz	VGA: up to 2048 x 1536 @ 60Hz HDMI: up to 3840 x 2160 @ 30Hz DP++: up to 3840 x 2160 @ 30Hz	
	Output	2 x HDMI, 1x DP++, 1 x VGA	2 x HDMI, 1x DP++, 1 x VGA	
	Multi Display	Up to 4 simultaneous outputs	Up to 4 simultaneous outputs	
	Video Format	H.264, VC1, MPEG-1, MPEG-2, MPEG-4 Part 2SP, MPEG-4 ASP, WMV9, DivX 3.11	H.264, VC1, MPEG-1, MPEG-2, MPEG-4 Part 2SP, MPEG-4 ASP, WMV9, DivX 3.11	
	Storage	SATA	1 x 2.5-inch SATA II HDD/SSD (supports 7 mm height only)	1 x 2.5-inch SATA II HDD/SSD (supports 7 mm height only)
	Ethernet	Interface	Gigabit LAN controller	Gigabit LAN controller
Controller		2 x Intel I211	1 x Intel I211	
Connector		2 x RJ-45	1 x RJ45	
I/O Interface	HDMI	2 (*HDMI 1 supports CEC only)	2 (*HDMI 1 supports CEC only)	
	DP++	1	1	
	VGA	1 (D-sub 15-pin)	1 (D-sub 15-pin)	
	LAN	2 (RJ-45)	1 (RJ-45)	
	USB 2.0	3	3	
	USB 3.0	1	1	
	Audio	1 x audio phone jack for Mic In, 1 x SPDIF/Line Out (supports jack sensing via OS settings)	1 x audio phone jack for Mic In, 1 x SPDIF/Line Out (supports jack sensing via OS settings)	
	Serial	2 x COM (RS-232) or 1 x COM (RS-232/RS-485/RS-422) & 1 x RS-232	1 x COM (RS-232)	
	Mini PCIe (Internal)	2 (full size for optional expansion modules)	1 (full size for optional expansion modules)	
	Power input	1 (DC-in jack)	1 (DC-in jack)	
Power Requirement	Management	ACPI 3.0	ACPI 3.0	
	Power Consumption	CPU N2930: - Typical: 10.5 W (w/o expansion) - Maximum: 15.7 W (w/o expansion)	CPU N2930: - Typical: 10.5 W (w/o expansion) - Maximum: 15.7 W (w/o expansion)	
		CPU J1900: - Typical: 9.7 W (w/o expansion) - Maximum: 22.6 W (w/o expansion)		
	Input Voltage	19 V DC in (ATX/AT mode, default ATX)	19 V DC in (ATX/AT mode, default ATX)	
	Others	Supports boot on power restore and scheduled boot up functions	Supports boot on power restore and scheduled boot up functions	
Watchdog Timer	Output	Interrupt, system reset	Interrupt, system reset	
	Interval	Programmable using SUSIAccess	Programmable using SUSIAccess	
Physical Characteristics	Mounting	Wall mount kits for LCD or plasma panels	Wall mount kits for LCD or plasma panels	
	Dimensions (W x H x D)	220 x 44.2 x 150 mm	220 x 44.2 x 150 mm	
	Weight	1.7 kg	1.7 kg	
Environment	Operating Temperature	0 - 40 °C (32 - 104 °F) (w/HDD); 0 - 65 °C (32 - 149 °F) (w/extended temperature memory and SSD)	0 - 40 °C (32 - 104 °F) (w/HDD); 0 - 65 °C (32 - 149 °F) (w/extended temperature memory and SSD)	
	Relative Humidity	95% @ 40° C (non-condensing)	95% @ 40° C (non-condensing)	
	Vibration Resistance	1.0 Grms, IEC 60068-2-64, random, 5-500 Hz, 10ct./min, 1hr/axis	1.0 Grms, IEC 60068-2-64, random, 5-500 Hz, 10ct./min, 1hr/axis	
Software Development Kit	Operating System	Supports Microsoft Windows 8.1/ 8/ 7, WES7P, WES7E	Supports Microsoft Windows 8.1/ 8/ 7, WES7P, WES7E	
	Linux	By project	By project	
Certification	EMC	CE, FCC Class B, BSMI	CE, FCC Class B, BSMI	
	Safety	UL, CCC, BSMI, CB, LVD	UL, CCC, BSMI, CB, LVD	

\*1 CEC pin reserved in HDMI; can be defined using software.


\*\*If only one RAM, please insert it into the SODIMM 1 slot before booting up.

## Dimensions

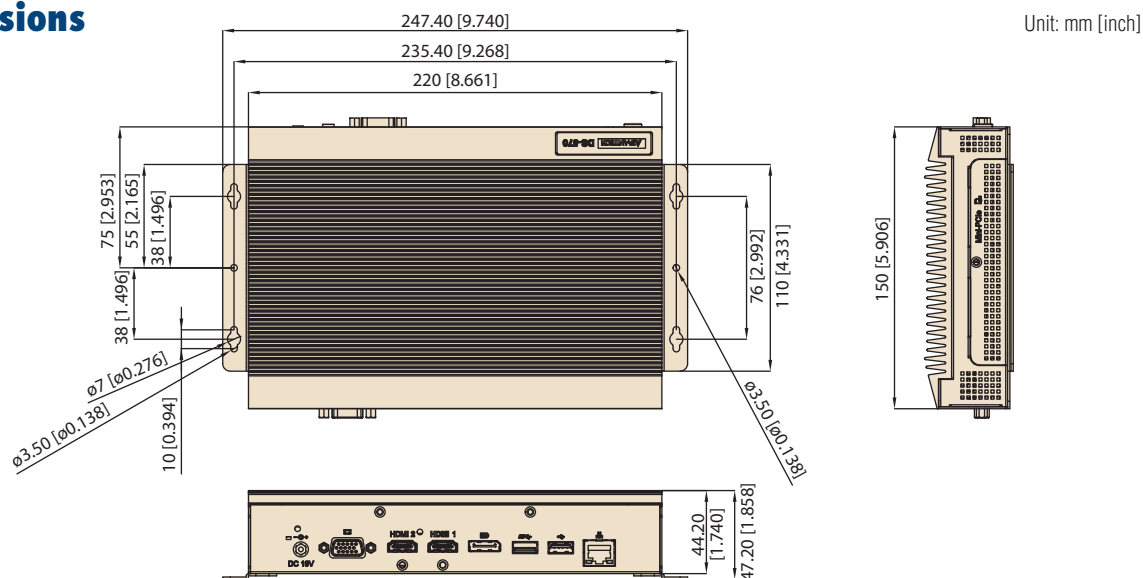


## DS-570 External I/O

Front

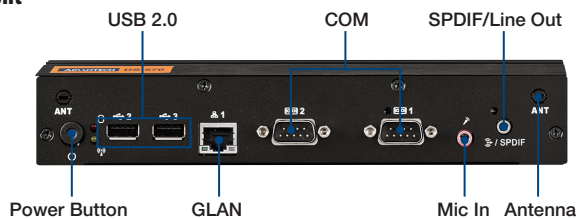

Rear

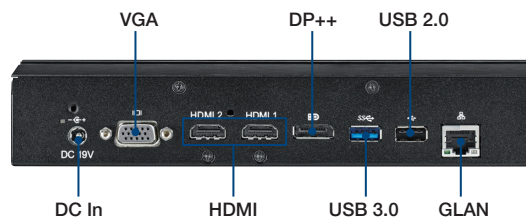

## Packing List

Part Number	Description
-	1 x DS-570 unit
-	1 x Bracket sets for power adapter
-	2 x Mount brackets
-	1 x Power adapter
-	1 x China RoHS

## Power Cord

Part Number	Description
1700001524	3-pin power cord (US)
170203183C	3-pin power cord (EU)
170203180A	3-pin power cord (UK)
1702031836	3-pin power cord (AU)
1700008921	3-pin power cord with PSE (Japan)
1700019146	3-pin power cord with CCC (China)

## Ordering Information

Part Number	Description
DS-570GB-U4A1E	DS-570, J1900+GeForce GT730M, barebone unit
DS-570GF-U4A1E	DS-570, J1900+GeForce GT730M, 2G RAM, 500G HDD
DS-570GQ-U4A1E	DS-570, J1900+GeForce GT730M, 2GRAM, 500GHDD, WES7P
DS-570GB-S8A1E	DS-570, N2930+GeForce GT730M, barebone unit
DS-570GF-S8A1E	DS-570, N2930+GeForce GT730M, 2G RAM, 500G HDD
DS-570GQ-S8A1E	DS-570, N2930+GeForce GT730M, 2G RAM, 500G HDD, WES7P
DS-570GL-S8A1E	DS-570GL, N2930+GeForce GT730M, 2G RAM, 500G HDD

## Embedded OS

Part Number	Description
2070013696	Img WES7E 64bit, EN/SC/TC/JP
2070013499	Img WES7E 32bit, EN/JP/TC/SC; SAS
2070013692	Img WES7P 64bit, EN/SC/TC/JP
2070013046	Img WES8 64bit, Eng/Jpn/SC/TC
2070015171	Img W10 16EL 64b 1701 ENU

Before OS installation, the OS should be selected and the BIOS settings configured accordingly.

## Optional Items

Part Number	Description
AMO-WIFI06E	Realtek/Wi-Fi 802.11bgn/mini PCIe module with cable and antenna
AMO-HSDPA02E	U-blox/HSDPA 6-band/mini PCIe module with cable and antenna

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Embedded Box Computers](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[tBOX312-870-FL-i7-DC](#) [tBOX313-835-FL-RJ-DC](#) [UPOS-3150-R0W0E](#) [ARK-20-S8A1E](#) [R2224WTTYSR](#) [BXNUC9i5QNX](#)  
[BXNUC9i5QNX1](#) [BKNUC9V7QNX](#) [BKNUC9V7QNX1](#) [2-A0DF-2001](#) [BKCMB1ABB](#) [BKCMB1ABA](#) [EM3000-3845-8-128-WL-U-1](#)  
[TANK-870AI-i5/8G/2A-R10](#) [PRFE21000038](#) [EM5000-I3-8-128-WL-W7-1](#) [EM3000-3845-8-128-WL-W7-1](#) [PRFE21000039](#) [AMOS-825-](#)  
[1Q10A1](#) [UPS-EDAI-X70864-U01-DC01](#) [UPX-EDGEI7-A10-1664-F01](#) [MXE-211/M8G](#) [PXIe-3985/M16G](#) [PXIe-3987/M16G/SSD](#)  
[ROScube-I, IntelR Core? i7, RQI-57](#) [AIMB-T1215DA-00Y0E](#) [AIMB-T1217DW-00Y0E](#) [AIMB-T12315A-00Y0E](#) [AMAX-5580-54000A](#)  
[APAX-5580-474AE](#) [ARK-6322-Q0A2E](#) [DS-100GF-S8A1E](#) [DS-100GL-S8A1E](#) [EPC-R4680CQ-XAA1E](#) [ESRP-CSS-UNO2484](#) [ITA-1611-](#)  
[10A1E](#) [ITA-1711-10A1E](#) [MIC-720AI-00A1](#) [UNO-247-J1N1AE](#) [UTX-3115FS-S6A2E](#) [AMI220AF-4L-7500](#) [ELIT-1200](#) [AIE100-903-FL](#)  
[EBOX671-517-FL-DC](#) [MVS900-511-FL](#) [AMS200](#) [SE-92-I7](#) [SI-606](#) [SI-60E](#) [ITG-100-AL-E1/2GB/S-R10](#)