

EKI-2525LI

5FE Slim-Type Unmanaged Industrial Ethernet Switch



Features

- 5 x fast Ethernet ports with auto MDI/MDI-X
- Supports 10/100 Mbps auto negotiation
- Compact size with DIN rail and wall mount
- IP40-rated metal enclosure
- Redundant 12 ~ 48 V_{DC} power terminal input plus one DC power jack and P-Fail relay
- Wide operating temperature range of -40 ~ 75°C

Introduction

The EKI-2525LI is a fast Ethernet solution. Power is delivered via a +12 ~ 48 VDC redundant input design with an additional DC power jack, and the unit is secured with power polarity reverse protection. Each port has 2 LED's to show the link status and transmission speed, and a relay output is included for an alarm events. In the event of a power failure, the built-in LED will activate the alarm to notify administrators. Engineers can simply verify the hardware status by checking the LED, which makes troubleshooting quick and easy. The EKI-2525LI comes with a compact metal enclosure, making it suitable for installation in narrow areas, and its IP40-rated enclosure ensures protection against dusty industrial environments.

Specifications

Communications

- **Standard IEEE** 802.3, 802.3u, 802.3x
- **LAN** 10/100BASE-TX
- **Transmission Distance** Up to 100 m
- **Transmission Speed** Up to 100 Mbps

Interface

- **Connectors** 5 x RJ45
6-pin removable terminal (power and relay)
1 x DC power jack
- **LED Indicators** PWR, PWR1, PWR2, PWR fail
10/100TX: link/activity, duplex

Power

- **Power Consumption** 3W
- **Power Input** 12 ~ 48 V_{DC}, redundant dual inputs
- **Fault Output** 1 relay output

Mechanism

- **Dimensions (W x H x D)** 25 x 80 x 84 mm (0.984" x 3.150" x 3.307")
- **Enclosure** IP40, metal housing with solid mounting kit
- **Mounting** DIN rail, wall

Protection

- **Reverse Polarity** Present
- **Overload Current** Present

Environment


- **Operating Temperature** -40 ~ 75 °C (-40 ~ 167 °F)
- **Storage Temperature** -40 ~ 85 °C (-40 ~ 185 °F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** 6,873,904 hours

Certification

- **EMI** CE, FCC Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
Shock IEC 60068-2-27
Freefall IEC 60068-2-32
Vibration IEC 60068-2-6

Dimensions

Unit: mm [in.]

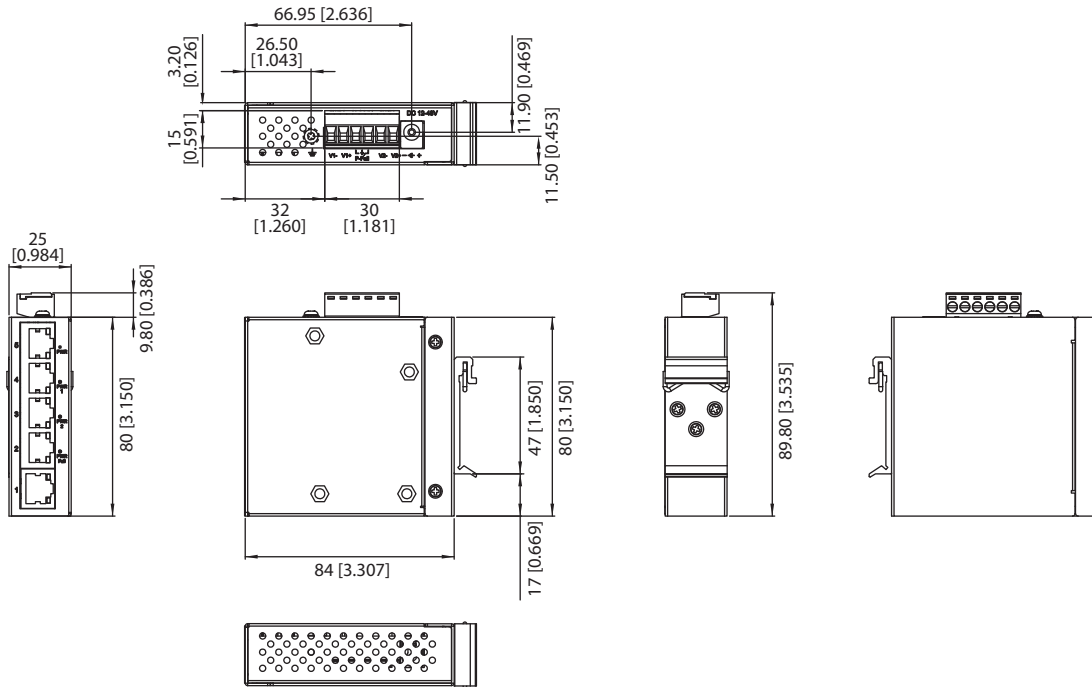

Panel Cut-Out Dimensions: 25 x 80 x 84 mm (0.984" x 3.150" x 3.307")

Ordering Information

- EKI-2525LI-AE 5FE Slim-Type Unmanaged Industrial Ethernet Switch

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [I210T1BLK](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC](#)
[EXTENDER 2001](#) [ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [7000-P3201-P050150](#) [750-1515](#) [750-494](#) [750-495](#) [750-497](#) [750-501](#) [750-612](#)
[750-613](#) [750-627](#) [750-643](#) [750-940](#) [753-440](#) [753-540](#) [753-650/003-000](#) [852-1322](#) [852-1328](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-](#)
[0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [USR-TCP232-T2](#) [2017008](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-](#)
[4FP-AE](#) [2352903-2](#) [753-620](#) [EGU-0702-SFP-T](#) [EKI-2706G-1GFPI-BE](#) [SW-125](#) [SW-525](#) [SW-725](#) [7000-74712-4780030](#) [7000-74712-](#)
[4780060](#) [7000-74712-4780100](#) [7000-74712-4780150](#)