

EKI-2525M EKI-2526M/S

**4+1 100FX Port Multi-Mode/Single Mode
Unmanaged Industrial Ethernet Switch**
**4+2 100FX Port Unmanaged Industrial
Ethernet Switch**



Features

- Provides 4 x 10/100 Mbps Ethernet ports with RJ45 connector
- Provides 1 x 100 Mbps Multi-mode SC type fiber optic port (EKI-2525M)
- Provides 2 x 100 Mbps Multi-mode SC type fiber optic port (EKI-2526M)
- Provides 2 x 100 Mbps Single-mode SC type fiber optic port (EKI-2526S)
- Supports full/half duplex flow control
- Supports MDI/MDI-X auto crossover
- Provides broadcast storm protection
- Provides redundant 12 ~ 48 V_{DC} power input
- Provides flexible mounting: DIN-rail and Wall mount

Introduction

EKI-2525M/2526M/2526S are industrial-grade Ethernet switches that enable you to expand your industrial network fast and cost-effectively. The EKI-2525M/2526M/2526S have four 10/100 Mbps Ethernet ports, and additionally the EKI-2525M/2526M provides one or two multi-mode fiber-optic ports, while the 2526S provide one or two single-mode single-mode fiber-optic ports. Using fiber-optics, you can prevent noise from interfering with your system and supports high-speed (100 Mbps) and high-distance (up to 30 km) transmissions.

EKI-2525M/2526M/2526S have industrial-grade designs, assuring high reliability and stability in harsh environments, making it a robust bridge between enterprise fiber-optic backbones and Ethernet devices. EKI-2525M/2526M/2526S includes a switch controller that can automatically sense transmission speeds. The RJ45 interface can also be autodetected, so MDI or MDI-X is automatically selected and a crossover cable is not required. All the Ethernet ports have memory buffers that support the store and forward mechanism, assuring all data is transmitted properly.

Specifications

Communications

- Standard** IEEE 802.3, 802.3u, 802.3x
- LAN** 10/100Base-T (X), 100Base-FX
- Transmission Distance** Ethernet: Up to 100 m
Multi-mode Fiber: Up to 2 km (EKI-2525M/2526M)
Single-mode Fiber: Up to 30 km (EKI-2526S)
- Transmission Speed** Up to 100 Mbps
- Optical Fiber** Wavelength: 1310nm
- Multi-Mode (EKI-2525M/EKI-2526M)** Tx Power: -14/-20 dBm
Rx Sensitivity: -31 dBm
Parameters: 50/125 um, 62.5/125 um
- Single-Mode (EKI-2526S)** Wavelength: 1310 nm
Tx Power: -8/-15 dBm
Rx Sensitivity: -34 dBm
Parameters: 9/125 um

Interface

- Connectors** 4 x RJ45 ports
1 x SC type fiber connector (EKI-2525M) or
2 x SC type fiber connector (EKI-2526M/S)
6-pin removable screw terminal (Power & Relay)
- LED Indicators** P1, P2, P-Fail
10/100TX: Link/Activity, Duplex/Collision

Power

- Power Consumption** EKI-2525M: Max. 5 W
EKI-2526M: Max. 6.41 W
EKI-2526S: Max. 6.45 W
- Power Input** 12 ~ 48 V_{DC}, redundant dual inputs
- Fault Output** 1 Relay Output

Mechanism

- Dimensions (W x H x D)** 37 x 140 x 95 mm (1.46" x 5.51" x 3.74")
- Enclosure** IP30, Metal shell with solid mounting kits
- Mounting** DIN-rail, Wall

Protection

- Reverse Polarity** Present
- Overload Current** Present

Environment

- Operating Temperature** EKI-2525M/2526M/2526S: -10~60°C (14~140°F)
- Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- Operating Humidity** 5 ~ 95% (non-condensing)
- Storage Humidity** 0 ~ 95% (non-condensing)
- MTBF** 610,453 hours


Certification

- Safety** UL 60950-1, CAN/CSA-C22.2 No.60950, Class I, Division 2
- EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- EMs** EN 61000-4-2, EN 61000-4-3, EN 61000-4-4
EN 61000-4-5, EN 61000-4-6, EN 61000-4-8
- Shock** IEC60068-2-27
- Freefall** IEC60068-2-32
- Vibration** IEC60068-2-6

Dimensions


Unit: [mm]

EKI-2525M

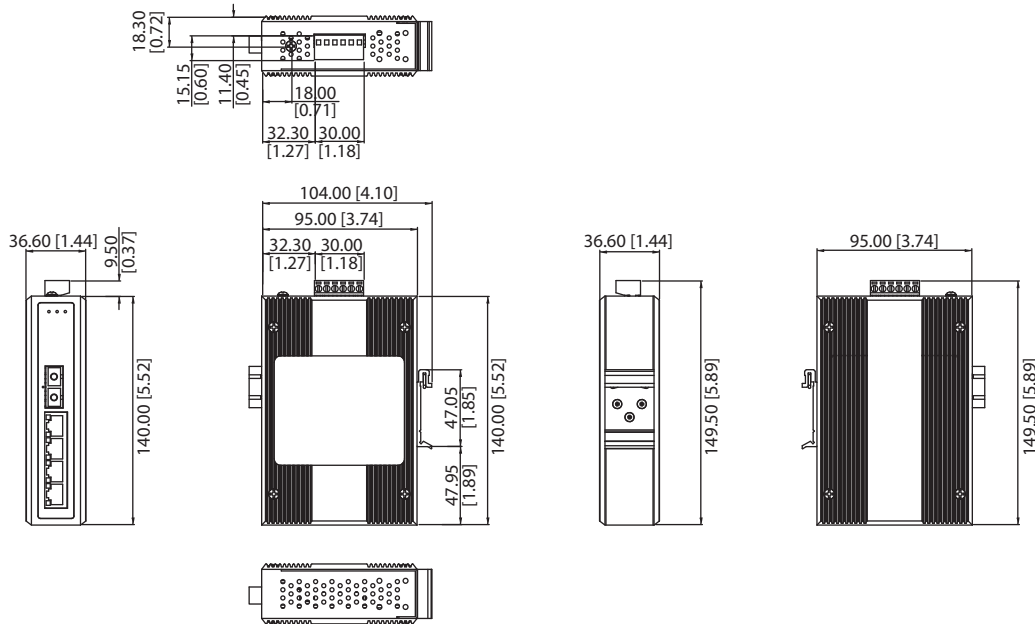

Panel Cut-out Dimensions: 104 x 140 x 36.6 mm (4.1" x 5.52" x 1.44")

EKI-2526M/S

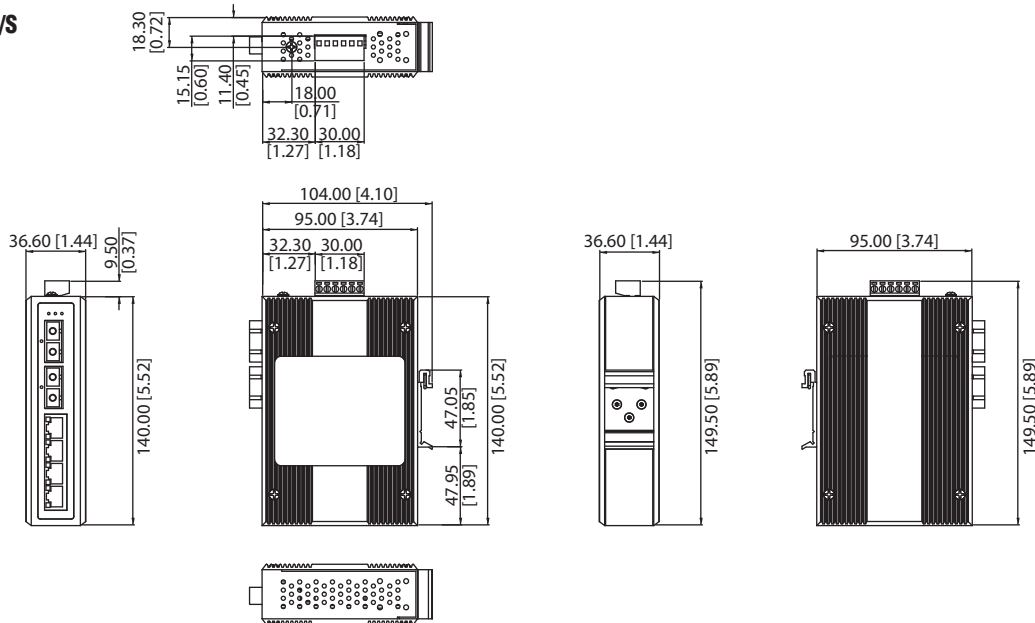

Panel Cut-out Dimensions: 104 x 140 x 36.6 mm (4.1" x 5.52" x 1.44")

Ordering Information

- | | | | |
|-------------|--|----------------|--|
| ▪ EKI-2525M | 5-port Ethernet Switch w/ 1-port 100FX Multi-mode | ▪ EKI-2526S-ST | 4-port Ethernet Switch w/ 2-port 100FX Single-mode (ST type connector) |
| ▪ EKI-2526M | 4-port Ethernet Switch w/ 2-port 100FX Multi-mode | ▪ EKI-2526M-ST | 4-port Ethernet Switch w/ 2-port 100FX Multi-mode (ST type connector) |
| ▪ EKI-2526S | 4-port Ethernet Switch w/ 2-port 100FX Single-mode | | |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC EXTENDER 2001](#)
[ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [7000-P3201-P050150](#) [750-451](#) [750-494](#) [750-495](#) [750-501](#) [750-612](#) [750-627](#) [750-643](#) [750-652](#) [750-](#)
[653/003-000](#) [753-440](#) [753-540](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [EKI-](#)
[7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-4FP-AE](#) [2352903-2](#) [EKI-2706G-1GFPI-BE](#) [SW-125](#) [7000-74712-4780030](#) [7000-74712-](#)
[4780060](#) [7000-74712-4780100](#) [7000-74712-4780150](#) [750-331](#) [753-649](#) [852-1200](#) [852-1210](#) [852-1280](#) [PM02TWA](#) [ICR-1601G](#) [BOXER-](#)
[6641-A1-1110](#) [EKI-7712G-4F-AE](#) [55150](#) [56005](#)