

EKI-2705G-1GPI

EKI-2705E-1GPI

4GE PoE + 1GE Unmanaged Industrial Switch

4FE PoE + 1GE Unmanaged Industrial Switch

Preliminary



EKI-2705G-1GPI

EKI-2705E-1GPI



Features

- Supports 10/100/1000Mbps auto negotiation (EKI-2705G)
- Supports jumbo frame transmission up to 9k bytes
- DIN-rail with IP30 metal mechanism
- Redundant 24 ~ 48 V_{DC} power input
- 4 x IEEE 802.3 af/at PoE /PoE+ ports & 1 x Giga (Fast Ethernet) Copper ports

Introduction

The EKI-2705 series supports 24 ~ 48V_{DC} redundant power input and is secured with a double protection mechanism: power polarity reverse protection and an overload current fuse. The EKI-2705 series supports up to 4-port IEEE 802.3 af/at PoE /PoE+ ports. Each port of EKI-2705 has two LED indicators to show the link status transmission speed. It also provides a relay output for an event alarm. In the event of a power failure, the built-in LED will activate the alarm to notify administrators. Engineers can simply verify the hardware status by checking the LED to make troubleshooting easily and fast. EKI-2705 comes with a compact metal housing rated at IP30 to protect against dusty industrial environments.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3ab, 802.3z
- **LAN** EKI-2705G-1GPI: 5 x 10/100/1000Mbps (RJ-45)
EKI-2705E-1GPI: 4 x 10/100Mbps (RJ-45) + 1 x 10/100/1000Mbps(RJ-45)
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable)
- **Transmission Speed** Gigabit Copper: 10/100/(1000) Mbps, Auto-Negotiation

Interface

- **Connectors** 5 x RJ-45
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail
Link / Speed / Activity/ POE

Power

- **Power Consumption** Max. 2 W
- **Power Input** 24 ~ 48 V_{DC}
- **Input current** 1.92A @ 48 V_{DC}
4.12A @ 24 V_{DC}
- **Fault Output** 1 Relay Output, 1 A @ 24 V_{DC}
- **Power Budget** 60W @ 75°C
90W @ 60°C

Mechanism

- **Dimensions (W x H x D)** 30 x 140 x 95 mm (1.18" x 5.51" x 3.74")
- **Enclosure** IP30, metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

Protection

- **Power Reverse** Present
- **Overload current** Present

Environment


- **Operating Temperature** -40 ~ 75 °C (-40 ~ 167 °F)
- **Storage Temperature** -40 ~ 85 °C (-40 ~ 185 °F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** 1,697,086 hours

Certification

- **Safety** UL 62368, e-Mark(pending)
- **EMI** CE, FCC Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Patent** <http://www.advantech.com/legal/patent>

Dimensions

Unit: mm [inch]

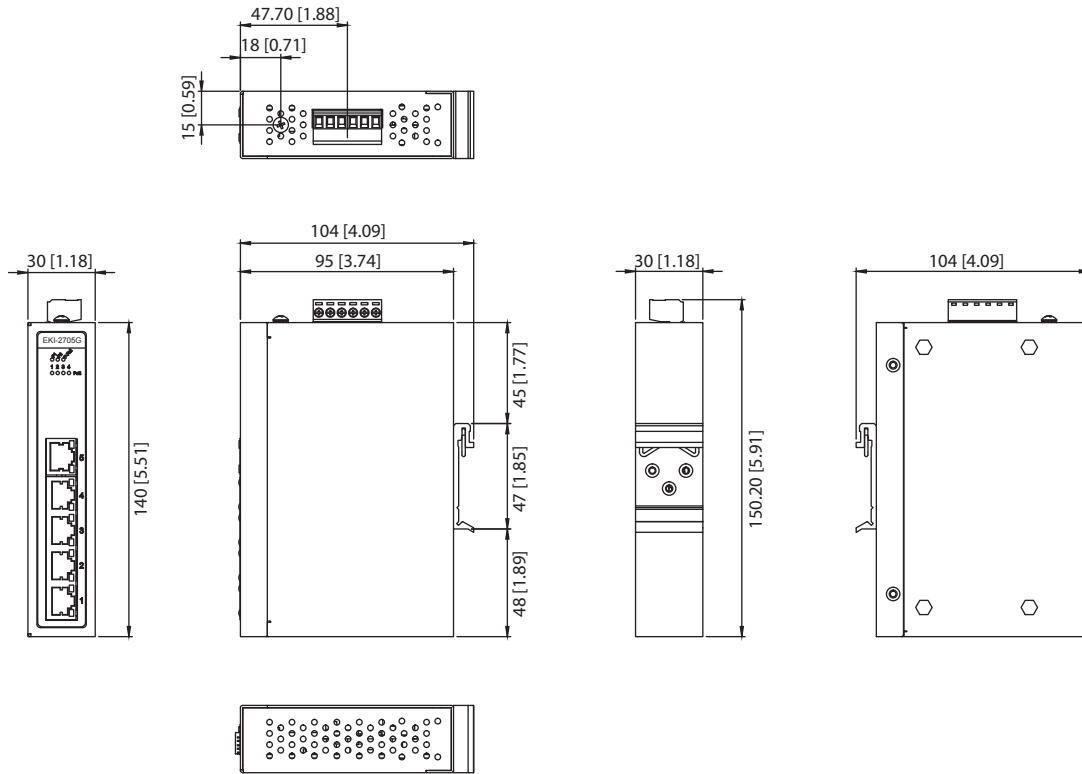

Ordering Information

- **EKI-2705G-1GPI-A** 4GE PoE + 1GE Unmanaged Industrial Switch w/Wide temp.
- **EKI-2705E-1GPI-A** 4FE PoE + 1GE Unmanaged Industrial Switch w/Wide temp.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[I350T4V2](#) [GX-OD1612](#) [TDKEZW3](#) [V23993-USB1029A](#) [I350T4V2BLK](#) [I350T2V2BLK](#) [FC6A-PH1](#) [EM-ETH-GATEWAY-IFS](#) [EK1122](#)
[EL1018](#) [EL1809](#) [EL2622](#) [EL2904](#) [EL3052](#) [EL4022](#) [EL6021](#) [EL6224](#) [EL6631](#) [EL9011](#) [EL9100](#) [KL1002](#) [KL1104](#) [KL2602-0010](#) [KL3208-](#)
[0010](#) [KL6821](#) [KL9100](#) [KL9200](#) [X710T2L](#) [RY9012A0000GZ00#002](#) [X710T4LBLK](#) [7000-44711-7960300](#) [7000-P6241-P060500](#) [2352903-2](#)
[BOXER-6614-A1M-1110](#) [ED-593](#) [WC-PD13C033I-1](#) [EL2809-0015](#) [WC-PD30A012C](#) [NS4](#) [USR-K3](#) [USR-K2](#) [USR-TCP232-E2](#) [WC-](#)
[PD13S120B](#) [WC-PD13C012S](#) [WC-PD07H012C](#) [WC-PD30D240H](#) [WC-PD25C012T](#) [WC-PD60B120A](#) [WC-PD13C050A](#) [WC-PD48B120A](#)