

EKI-2706E-1GFP/I EKI-2706G-1GFP/I

4FE PoE+1GE+1G SFP Unmanaged Industrial Switch 4GE PoE+1GE+1G SFP Unmanaged Industrial Switch



EKI-2706E-1GFP/I

EKI-2706G-1GFP/I



Features

- Supports 10/100/1000 Mbps Auto Negotiation (EKI-2706G)
- Supports jumbo frame transmission up to 9 kbytes
- DIN-rail with IP30 metal mechanism
- Redundant 48 V_{DC} power input
- Provides broadcast storm protection
- 4 x IEEE 802.3 af/at PoE /PoE+ ports + 1 x Gigabit Copper + 1 Gigabit SFP ports

Introduction

The EKI-2706 series supports 48V_{DC} redundant power input and is secured with a double protection mechanism: Power Polarity Reverse Protection and an Overload Current Fuse. The EKI-2706 series supports up to 4-port IEEE 802.3 af/at PoE /PoE+ ports. Each port of EKI-2706 has two LED's to show the link status, transmission speed, and collision status. It also provides a relay output for an event alarm. In the event of a power failure, the built-in LED will activate the alarm to notify administrators. Engineers can simply verify the hardware status by checking the LED to make troubleshooting quick and easy. EKI-2706 comes with a compact metal housing rated at IP30 to protect against dusty industrial environments.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.1ab, 802.1z
- **LAN** EKI-2706E-1GFP/I :
4 x 10/100Mbps(RJ-45)+1 x 10/100/1000Mbps(RJ-45)
+1 x 100/1000Mbps(SFP)
EKI-2706G-1GFP/I :
5 x 10/100/1000Mbps(RJ-45)+1 x 100/1000Mbps(SFP)
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable)
SFP: Up to 110 km (depends on SFP)
- **Transmission Speed** Ethernet: 10/100 Mbps Auto-Negotiation
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation
Gigabit Fiber: Up to 1000 Mbps

Interface

- **Connectors** 5 x RJ-45 + 1 x SFP
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail
Link / Speed / Activity

Power

- **Power Consumption** Max. 2 W
- **Power Input** 48 V_{DC}
- **Fault Output** 1 Relay Output, 1 A @ 24 V_{DC}
- **Power Budget** 90W

Mechanism

- **Dimensions (W x H x D)** 30 x 140 x 95 mm (1.18" x 5.51" x 3.74")
- **Enclosure** IP30, metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

Protection

- **Power Reverse** Present
- **Overload current** Present

Environment


- **Operating Temperature** EKI-2706E-1GFP & EKI-2706G-1G1FP :
-10 ~ 60 °C (14 ~ 140 °F)
EKI-2706E-1GFP/I & EKI-2706G-1G1FP/I :
-40 ~ 75 °C (-40 ~ 167 °F)
- **Storage Temperature** -40 ~ 85 °C (-40 ~ 185 °F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** 1,697,086 hours

Certification

- **Safety** UL 60950
- **EMI** CE, FCC Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Patent** <http://www.advantech.com/legal/patent>

Dimensions

Unit: [mm]

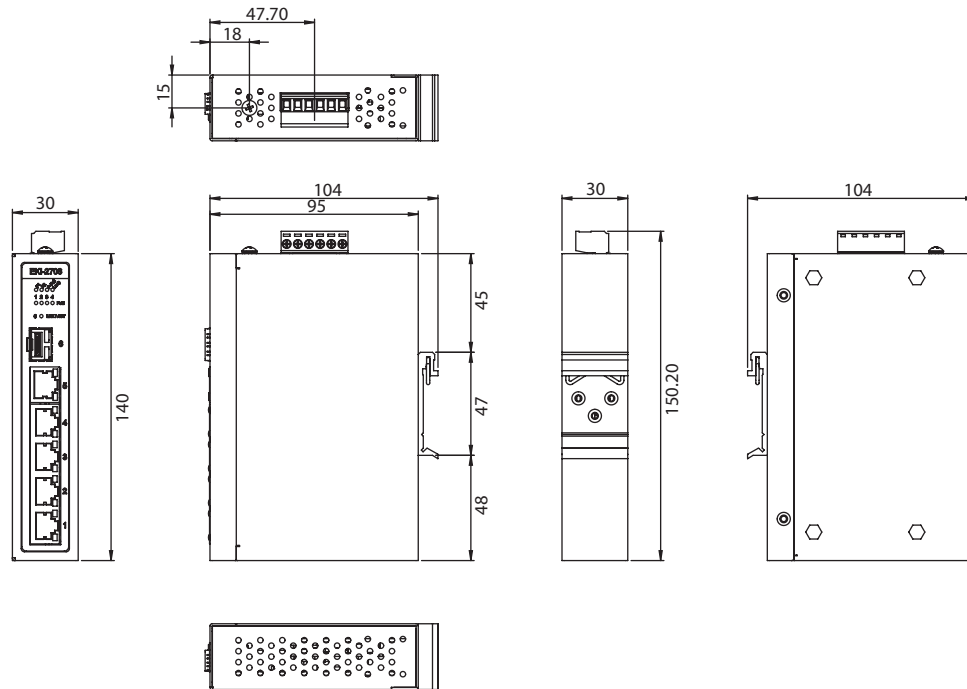

Panel Cut-out Dimensions: 30 x 140 x 95 mm (1.18" x 5.51" x 3.74")

Ordering Information

- **EKI-2706E-1GFP-AE** 4FE PoE+1GE+1G SFP Unmanaged Industrial PoE Switch
- **EKI-2706E-1GFPI-AE** 4FE PoE+1GE+1G SFP Unmanaged Industrial PoE Switch w/Wide temp.
- **EKI-2706G-1GFP-AE** 4GE PoE+1GE+1G SFP Unmanaged Industrial PoE Switch
- **EKI-2706G-1GFPI-AE** 4GE PoE+4GE+1G SFP Unmanaged Industrial PoE Switch w/Wide temp.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC EXTENDER 2001](#)
[ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [7000-P3201-P050150](#) [750-451](#) [750-494](#) [750-495](#) [750-501](#) [750-612](#) [750-627](#) [750-643](#) [750-652](#) [750-](#)
[653/003-000](#) [750-940](#) [753-440](#) [753-540](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-](#)
[L4X2.X.X.X.X.](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-4FP-AE](#) [2352903-2](#) [EKI-2706G-1GFPI-BE](#) [SW-125](#) [7000-74712-](#)
[4780030](#) [7000-74712-4780060](#) [7000-74712-4780100](#) [7000-74712-4780150](#) [750-331](#) [753-649](#) [852-1200](#) [852-1210](#) [852-1280](#) [PM02TWA](#)
[ICR-1601G](#) [BOXER-6641-A1-1110](#) [EKI-7712G-4F-AE](#) [55150](#)