

EKI-2725 / I

5-port Gigabit Unmanaged Industrial Ethernet Switch



Features

- Provides 5 Gigabit Ethernet ports with Auto MDI/MDI-X
- Supports 10/100/1000 Mbps Auto Negotiation
- Supports jumbo frame transmission up to 9kbytes
- Provides Slim size, DIN-rail with IP30 metal mechanism
- Supports Redundant 12 ~ 48 V_{DC} power input and P-Fail Relay

Introduction

The EKI-2725 supports Gigabit Ethernet. The power is a +12 ~ 48 V_{DC} redundant input design, and is secured with a double protection mechanism: Power Polarity Reverse Protect and an Overload Current Fuse. The former tolerates reverse power wiring while the later secures the system from overload currents. Each port of EKI-2725 has 2 LED's to show the link status transmission speed and collision status. It also provides a relay output for an event alarm. In the event of a power failure, the built-in LED will activate the alarm to notify administrators. Engineers can simply verify the hardware status by checking the LED, and have troubleshooting easy and quick. EKI-2725 comes with compact metal housing that rates IP30 to help against from dusty industrial environments.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3ab
- **LAN** 10/100/1000Base-T(X)
- **Transmission Distance** Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable)
- **Transmission Speed** Up to 1000 Mbps

Interface

- **Connectors** 5 x RJ45
6-pin removable screw terminal (power & relay)
- **LED Indicators** P1, P2, P-Fail
10/100/1000T (X): Link/Activity, Duplex/Collision

Power

- **Power Consumption** 2.5W
- **Power Input** 12 ~ 48 V_{DC}, redundant dual inputs
- **Fault Output** 1 Relay Output

Mechanism

- **Dimensions (W x H x D)** 30 x 140 x 95 mm (1.18" x 5.51" x 3.74")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

Protection

- **Power Reverse** Present
- **Overload current** Present

Environment


- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)
-40 ~ 75°C (-40 ~ 167°F) / (I model)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 10 ~ 95% (non-condensing)
- **Storage Humidity** 10 ~ 95% (non-condensing)
- **MTBF** 2,296,909 hours

Certifications

- **Safety** UL 60950
- **EMI** CE, FCC Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

Dimensions

Unit: [mm]

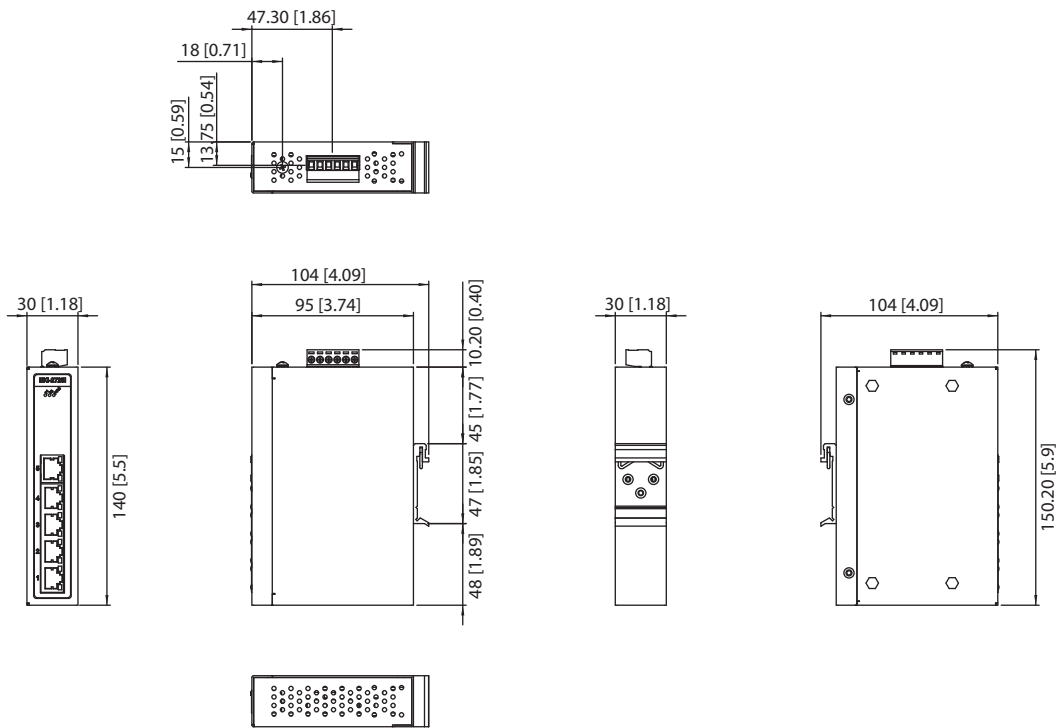

Ordering Information

- EKI-2725-CE 5-port Gigabit Unmanaged Switch
- EKI-2725I-CE 5-port Gigabit Unmanaged Switch w/wide temp

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[1026937](#) [1026932](#) [M38510/00302BCA](#) [70001610](#) [70001634](#) [850-15633](#) [PD-AS-951/12-24](#) [GX-OC1601](#) [1402407](#) [I210T1](#) [SBL2EX](#)
[SL170115](#) [GX-OD1612](#) [CPTS-4R4E-R](#) [TDKEZW3](#) [I350F2](#) [I350F2BLK](#) [I350T2V2](#) [V23993-USB1029A](#) [100-POE4](#) [105FX-ST](#) [105TX-SL](#)
[SEG305-T](#) [70001992](#) [708TX](#) [854-19720](#) [I350T4V2BLK](#) [I210T1BLK](#) [PD-OUT/MBK/S](#) [SX-BR-4600WAN2-US](#) [W4S105C](#)
[X710DA4FHBLK](#) [GX-ID1611](#) [EKI-2525I-BE](#) [96NIC-1G4P-PE-IN2](#) [0.70001777](#) [105FXE-SC-15-POE](#) [PD-OUT/MBK/G](#) [856-15410](#)
[X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [855-10932](#) [850-15526](#) [808-38157](#) [SF-100GLB0W00-0DB](#) [BCM84858RB1KFEBG](#)
[1031683](#) [2702903](#) [SF-100GLB3.5W-3DB](#)