

EKI-2741XL Series

10/100/1000T (X) to Fiber Optic Gigabit Media Converters



EKI-2741FL

EKI-2741ML/SL



Features

- 1 x 10/100/1000 Mbps Ethernet port with RJ45 connector
- 1 x 1000 Mbps fiber port with SC type connector for 1000Base-SX/LX device
- 1 x 100/1000 Mbps Ethernet port with SFP (mini-GBIC) type
- MDI/MDI-X auto crossover
- Supports auto-negotiation
- Cost-Effective

Introduction

The EKI-2741 series is designed to convert Gigabit Ethernet networks to Gigabit fiber networks by transparently converting Ethernet signals to optic signals. Therefore, the EKI-2741 series is an ideal solution for “fiber to building” applications at central offices or local sites. EKI-2741 series supports MDI/MDIX auto detection, so you don’t need to use crossover wires. EKI-2741 series is an enhanced gigabit Ethernet to fiber optic converter. Furthermore, the EKI-2741 series can work normally from 0 to 50°C and also is the most cost-effective solution for fiber optic media converter.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3ab, 802.3x, IEEE 802.3z
- **LAN** 10/100/1000Base-T (X), 1000Base-SX or 1000Base-LX
- **Transmission Distance** Ethernet: Up to 1000 m
SFP: N/A (EKI-2741FL)
Multi-mode: Up to 550 m (EKI-2741ML)
Single-mode: Up to 10 km (EKI-2741SL)
- **Transmission Speed** Up to 1000 Mbps
- **Optical Fiber**
 - Multi-mode (EKI-2741ML)
 - Wavelength: 850 nm
 - Tx Power: -4/-9.5 dBm
 - Rx Sensitivity: -17 dBm
 - Parameters: 50/125 um, 62.5/125 um
 - Single-mode (EKI-2741SL)
 - Wavelength: 1310 nm
 - Tx Power: -3/-9.5 dBm
 - Rx Sensitivity: -20 dBm
 - Parameters: 9/125 um

Interface

- **Connectors**
 - 1 x RJ45
 - 1 x SC type fiber connector (EKI-2741ML/SL) or 1 x SFP type fiber connector (EKI-2741FL)
- **LED Indicators**
 - EKI-2741ML/SL: FIBER, LAN, PWR
 - EKI-2741FL: Fiber: LINK/ACT
LAN: LINK/ACT
PWR

Power

- **Operating Current** 0.61A (EKI-2741ML/SL)
0.52A (EKI-2741FL)
- **Power Consumption** 3.5 W (EKI-2741ML/SL)
0.5 W (EKI-2701FL, w/o insert SFP transceiver)
- **Power Adapter** 5V DC, 1A external power adapter

Mechanism

- **Dimensions (W x H x D)** EKI-2741ML/SL: 75 x 22.6 x 101.2 mm (2.95" x 0.89" x 3.98")
EKI-2741FL: 60.88 x 23 x 75.58 mm (2.4" x 0.91" x 2.98")
- **Enclosure** IP30

Protection

- **Reverse Polarity** Present

Environment


- **Operating Temperature** 0 ~ 50°C (32 ~ 122°F)
- **Storage Temperature** -40 ~ 70°C (-40 ~ 158°F)
- **Humidity** 5 ~ 90% (non-condensing)
- **MTBF** EKI-2741ML/SL: 1,269,493 hours
EKI-2741FL: 1,031,686 hours

Certification


- **Safety** LVD
- **EMI** EN 55024/ EN 55032 Class A,
FCC Part 15 Subpart B Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
EN 61000-4-11
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

Dimensions

Unit: mm

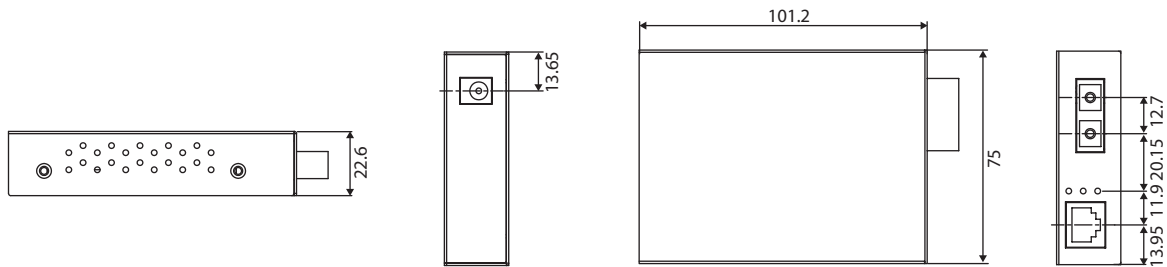

EKI-2741ML/SL Panel Cut-out Dimensions: 75 x 22.6 x 101.2 mm (2.95" x 0.89" x 3.98")

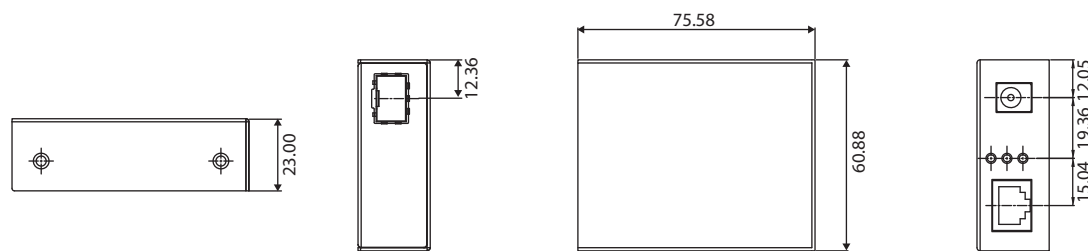

EKI-2741FL Panel Cut-out Dimensions: 60.88 x 23 x 75.58 mm (2.4" x 0.91" x 2.98")

Ordering Information

Model Number	Description	Wavelength	Transmission Distance
EKI-2741ML-EU-AE	Giga Ethernet to 1000Base-SX Fiber Converter, Multi-mode, SC connector (EU Adapter)	850 nm	550 m
EKI-2741ML-UK-AE	Giga Ethernet to 1000Base-SX Fiber Converter, Multi-mode, SC connector (UK Adapter)	850 nm	550 m
EKI-2741ML-US-AE	Giga Ethernet to 1000Base-SX Fiber Converter, Multi-mode, SC connector (US Adapter)	850 nm	550 m
EKI-2741SL-EU-AE	Giga Ethernet to 1000Base-SX Fiber Converter, Single-mode, SC connector (EU Adapter)	1310 nm	10 km
EKI-2741SL-UK-AE	Giga Ethernet to 1000Base-SX Fiber Converter, Single-mode, SC connector (UK Adapter)	1310 nm	10 km
EKI-2741SL-US-AE	Giga Ethernet to 1000Base-SX Fiber Converter, Single-mode, SC connector (US Adapter)	1310 nm	10 km
EKI-2741FL-EU-AE	Giga Ethernet to SFP Fiber Converter (EU Adapter)	N/A	N/A
EKI-2741FL-UK-AE	Giga Ethernet to SFP Fiber Converter (UK Adapter)	N/A	N/A
EKI-2741FL-US-AE	Giga Ethernet to SFP Fiber Converter (US Adapter)	N/A	N/A

Optional Accessories

Part Number	Description	Fiber Type	Range	Power Budget
Optical Transceivers (SFP) - LC				
808-38200	SM1310	LC	20 km	14 (db)
808-38201	MM850	LC	550 m	7.5 (db)
808-38203	SM1310/PLUS	LC	30 km	17 (db)
808-38204	SM1550/LONG	LC	40 km	17 (db)
Optical Transceivers (SFP) - SC				
808-38221	SSLX-SM1310/1550	SC	20 km	15 (db)
808-38222	SSLX-SM1550/1310	SC	20 km	15 (db)
808-38223	SSLX-SM1310/1550/PLUS	SC	40 km	20 (db)
808-38224	SSLX-SM1550/1310/PLUS	SC	40 km	20 (db)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Media Converters](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[EIS-PS-US](#) [CF-020010-009](#) [EIS-EXTEND-C-EU](#) [DT5002F](#) [E104-BT02](#) [CTM8251KAD](#) [EKI-2541ML-EU-AE](#) [EKI-2541SL-EU-AE](#) [EKI-2741ML-EU-AE](#) [EKI-2741SL-EU-AE](#) [CF-020011-2N9](#) [EKI-1751PI-M-AE](#) [EKI-1751PI-R-AE](#) [EKI-2541M-AE](#) [EKI-2541MI-AE](#) [EKI-2541S-AE](#) [EKI-2541SI-AE](#) [EKI-2741F-BE](#) [EKI-2741FI-BE](#) [EKI-2741FL-EU-AE](#) [EKI-2741FL-US-AE](#) [EKI-2741LX-AE](#) [CA-628485-D84](#) [CA-628485-D85](#) [CF-020008-000](#) [CF-020008-001](#) [CF-020010-721](#) [CF-020010-97X](#) [CF-020011-32N](#) [CF-020011-330](#) [CF-901201-097](#) [CTC-55F005-NW](#) [102MCE-SC-15](#) [102MC-SC](#) [850-15526](#) [855-10932](#) [856-15410](#) [857-11912](#) [IMC-350I-SE-PS-A](#) [IMC-350-MMST-PS-A](#) [IMC-350I-M8ST-PS-A](#) [IMC-350I-MM-A](#) [IMC-350I-SE-A](#) [IMC-350I-M8-A](#) [IMC-350I-SFP-PS-A](#) [IMC-370I-MM-PS-A](#) [IMC-370I-SST-PS-A](#) [MS8PD](#) [MS8S2G](#) [2702944](#)