

EKI-6311GN

IEEE 802.11 b/g/n Wi-Fi AP/Client



Features

- Compliant with IEEE 802.11 b/g/n
- IP55 waterproof certification
- Embedded 8 dBi directional antenna with external N-type connector for optional antenna
- High output power 26 dBm
- MIMO 1 x 1 11n
- Passive 15 V PoE
- Supports distances up to 5 km
- WPA/WPA2-Enterprise encryption for a highly secure wireless network
- WEP/WPA/WPA2/ IEEE 802.1x authentication support
- Spanning Tree and IGMP snooping protocol support

Introduction

The EKI-6311GN is a feature rich wireless AP/Client which provides a reliable wireless connectivity for industrial environments. The PoE injector enhances flexibility in deployment of this AP/Client even where the DC power supply is hard to fulfill. As an 802.11n compliant device, EKI-6311GN provides 3 times higher data rates than legacy 802.11g devices. With the support of STP, WMM and IGMP snooping protocols, EKI-6311GN effectively improves the reliability of wireless connectivity, especially in applications that need high reliability and high throughput data transmission. To secure wireless connections, EKI-6311GN implements the latest encryption technologies including WPA2/WPA/802.1x for powerful security authentication.

Specifications

Standard Support

- **Wireless** IEEE 802.11b/g/n
- **Ethernet** IEEE 802.3u MDI / MDIX 10/100 Fast Ethernet
- **LAN** IEEE 802.11b/g wireless LAN interface
IEEE 802.11n wireless LAN standard
Passive 15 V PoE, max. distance: 20 meters
- **Certification** US FCC Part 15 Class B & C & E
Europe ETSI 300 328, ETSI 301 489-1&17,
EN 60950 compliant and CE Mark
- **Data Rates** 802.11b 11, 5.5, 2, 1 Mbps, auto-fallback,
802.11g 54, 48, 36, 24, 18, 12, 9, 6 Mbps,
auto-fallback
- **IEEE 802.11n:** 6 M, 6.5 M, 13 M, 13.5 M, 19.5 M, 26 M, 27 M, 39 M,
40.5 M, 53 M, 54 M, 58.5 M, 65 M, 78 M, 81 M,
104 M, 108 M, 117 M, 121.5 M, 130 M, 135 M,
150 Mbps

Physical Specifications

- **Power** DC 15 V / 0.8A; AC Adapter 100 V ~ 240 V
- **Dimensions (W x H x D)** 60 x 165 x 34 mm (2.36" x 6.50" x 1.34")
- **Mounting** Wall, Pole
- **Weight** 0.5 Kg

Environment

- **Operating Temperature** Non Heater : -20 ~ 70°C (-4 ~ 158°F)
- **Storage Temperature** -30 ~ 80°C (-22 ~ 176°F)
- **Humidity** 10% ~ 95% non-condensing

Interface Operation Modes

- Access Point (AP) / Client

Antenna

- Antenna Configuration 1x1 (1 Tx, 1 Rx)
- Default embedded 8 dBi directional antenna (Vertical-Pol)
- Reserve N-type Connector (Plug) *Switchable by software
- Equipped N-to-RSMA adaptor and 5dBi dipole antenna for indoor AP applications.

Other Features

- Telnet, FTP, SNMP, Password Changes, Firmware updates, Configuration Files
- Radio on/off, WMM/Regatta Mode, Output Power Control, Fragmentation Length, Beacon Interval
- RTS/CTS threshold, DTIM Interval

Modulation Techniques

- **IEEE 802.11n** OFDM (BPSK, QPSK, 16-QAM, 64-QAM)
- **IEEE 802.11b** DSSS (DBPSK, DQPSK, CCK)
- **IEEE 802.11g** OFDM (BPSK, QPSK, 16-QAM, 64-QAM)

Channel Support


- **IEEE 802.11b/g/gn** HT20
FCC: CH1 ~ CH11; ETSI: CH1 ~ CH13
- **IEEE 802.11gn** HT40
FCC: CH3 ~ CH9; ETSI: CH3 ~ CH11

Wireless Transmission Rates

- **Transmitted Power** 802.11b: 26 dBm
802.11g: 26 dBm @ 6 Mbps, 24 dBm @ 54 Mbps
802.11gn HT20: 26 dBm @ MCS0, 22 dBm @ MCS7
802.11gn HT40: 26 dBm @ MCS0, 21 dBm @ MCS7

Dimensions

Unit: [mm]

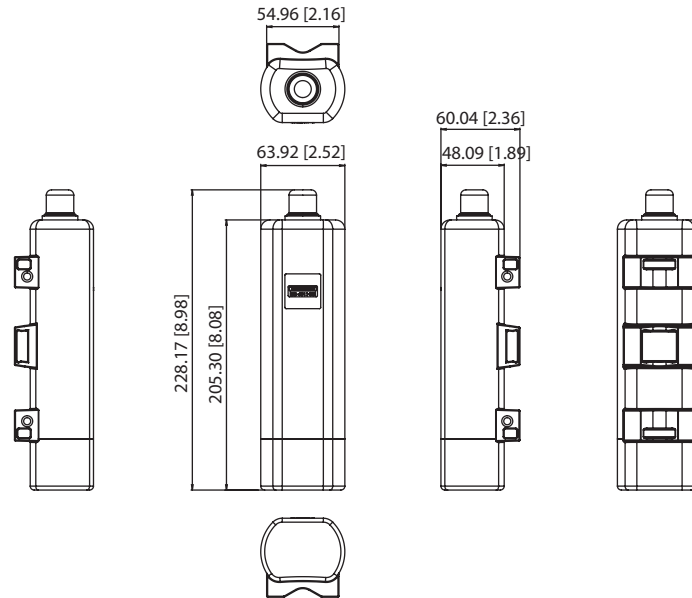

Panel Cut-out Dimensions: 228.17 x 63.92 x 60.04 mm (8.98" x 2.52" x 2.36)

Receiver Sensitivity

- **802.11b Sensitivity** -93 dBm @ 1 Mbps; -88 dBm @ 11 Mbps
- **802.11g Sensitivity** -89 dBm @ 6 Mbps; -73 dBm @ 54 Mbps
- **802.11n HT20** -88 dBm @ MCS0; -70 dBm @ MCS7
- **802.11n HT40** -84 dBm @ MCS0; -67 dBm @ MCS7

Ordering Information

- **EKI-6311GN** 802.11 b/g/n Wireless AP/Client (US)
- **EKI-6311GN-EU** 802.11 b/g/n Wireless AP/Client (EU)

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [WiFi / 802.11 Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[DVK-WB50NBT](#) [KBPC10/15/2506WP](#) [GT202-GC3013](#) [WIFI-RT5392-SB-R10](#) [849WM520100E](#) [WIFI-AT2350](#) [ATWILC1000-MR1100B](#)
[NVLJF3117PT1G](#) [HDG204-DN-3](#) [QCA4004X-BL3B](#) [32-2006-BU](#) [LBEE5ZZ1CK-982](#) [WLNN-AN-DP551](#) [WLNN-ER-DP551](#) [RN-171-](#)
[I/RM](#) [ATWILC3000-MR110CA](#) [BP3595](#) [BP3599](#) [GT202-IC2006](#) [RS9113-N00-D0F](#) [QCA4002X-AL3A](#) [QCA4004X-AL3A](#) [QCA4004X-](#)
[AL3B](#) [RS9113-N0Z-S1W](#) [SD-528](#) [ST60-2230C](#) [ENW-49A01C3EF](#) [ATSAMW25H18-MR210PB](#) [2649](#) [814](#) [EWM-W135H01E](#) [AMW006/R](#)
[ATSAMW25H18-MR210PA](#) [ATSAMW25H18-MR510PB](#) [ATWINC1510-MR210PB1140](#) [ABDN-ER-DP551](#) [ABDN-ER-IN5010](#) [ABDN-](#)
[ER-IN5018](#) [ABDN-SE-IN5410](#) [ABDN-SE-IN5420](#) [APMN-Q551](#) [APXN-Q5428](#) [WLNN-SE-DP551](#) [20-101-1319](#) [20-101-1320](#) [20-101-1321](#)
[70001807](#) [DC-WME-Y402-C](#) [DC-WME-Y413-C](#) [DC-WME-Y413-LX](#)