

# EKI-7626C/CI

## 16+2G Combo Port Gigabit Unmanaged Industrial Ethernet Switch



### Features

- Provides 2 Gigabit Copper/SFP combo port plus 16 Fast Ethernet ports (EKI-7626C/CI)
- SFP socket for Easy and Flexible Fiber Expansion
- Supports Auto Negotiation and Auto MDI/MDI-X
- Provides flexible mounting: DIN-rail and Wall mount
- Supports Dual 12 ~ 48 V<sub>DC</sub> power input and 1 relay output
- Supports wide operating temperatures from -40 to 75°C (EKI-7626CI)

### Introduction

Aside from 2 Gigabit fiber optic/copper combo ports, the EKI-7626C/CI comes equipped with 16 x 10/100Base-T (X) fast Ethernet ports. Traditional RJ45 ports can be used for up-linking wide-band paths in short distances (< 100 m), or the appropriate replaceable SFP module can be used for the application of wideband uploading and long distance transmissions to flexibly fit field requests. The long MTBF (Mean Time Between Failures) ensures low operation and maintenance cost. EKI-7626C/CI includes a switch controller that can automatically sense transmission speeds (10/100 Mbps) The RJ45 interface can also be auto-detected, so MDI or MDI-X is automatically selected and a cross-over cable is not required. All Ethernet ports have memory buffers that support the store-and-forward mechanism, which assures that data can be transmitted properly

### Specifications

#### Communications

- **Standard** IEEE 802.3, 802.3ab, 802.3u, 802.3x, 802.3z
- **LAN** 100Base-TX, 10/100Base-T, Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100 m (4-wire Cat.5e, Cat.6 RJ45 cable suggested for Gigabit port)  
Gigabit Fiber: Up to 110 km (depending on SFP)
- **Transmission Speed** Ethernet: 10/100 Mbps Auto-Negotiation  
Gigabit Copper: 10/100/1000 Mbps, Auto-Negotiation  
SFP: Up to 1000 Mbps

#### Interface

- **Connectors** 16 x RJ45 (Ethernet) with 2 x RJ45/SFP (mini-GBIC) combo ports (EKI-7626C/CI)  
6-pin removable screw terminal (Power & Relay)
- **LED Indicators** System: PWR1, PWR2, P-Fail  
Gigabit Copper: Link/Activity, Speed (1000 Mbps)  
Gigabit SFP: Link/Activity

#### Power

- **Power Consumption** Max. 6.5 W
- **Power Input** 12 ~ 48 V<sub>DC</sub>, redundant dual inputs
- **Fault Output** 1 Relay Output

#### Mechanism

- **Dimensions (W x H x D)** 79 x 152 x 105 mm (3.11" x 5.98" x 4.13")
- **Enclosure** IP30, Metal shell with solid mounting kits
- **Mounting** DIN-rail, Wall

#### Protection

- **Reverse Polarity** Present
- **Overload Current** Present

#### Environment


- **Operating Temperature** -10 ~ 60°C (14 ~ 140°F)  
Wide Temp. Model -40 ~ 75°C (-40 ~ 167°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Operating Humidity** 5 ~ 95% (non-condensing)
- **Storage Humidity** 0 ~ 95% (non-condensing)
- **MTBF** 295,000 hours

#### Certification

- **Safety** UL 60950-1, CAN/CSA-C22.2 No.60950
- **EMI** FCC Part 15 Subpart B Class A, EN 55022 Class A
- **EMS** EN 61000-4-2  
EN 61000-4-3  
EN 61000-4-4  
EN 61000-4-5  
EN 61000-4-6  
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6

## Dimensions

Unit: [mm]

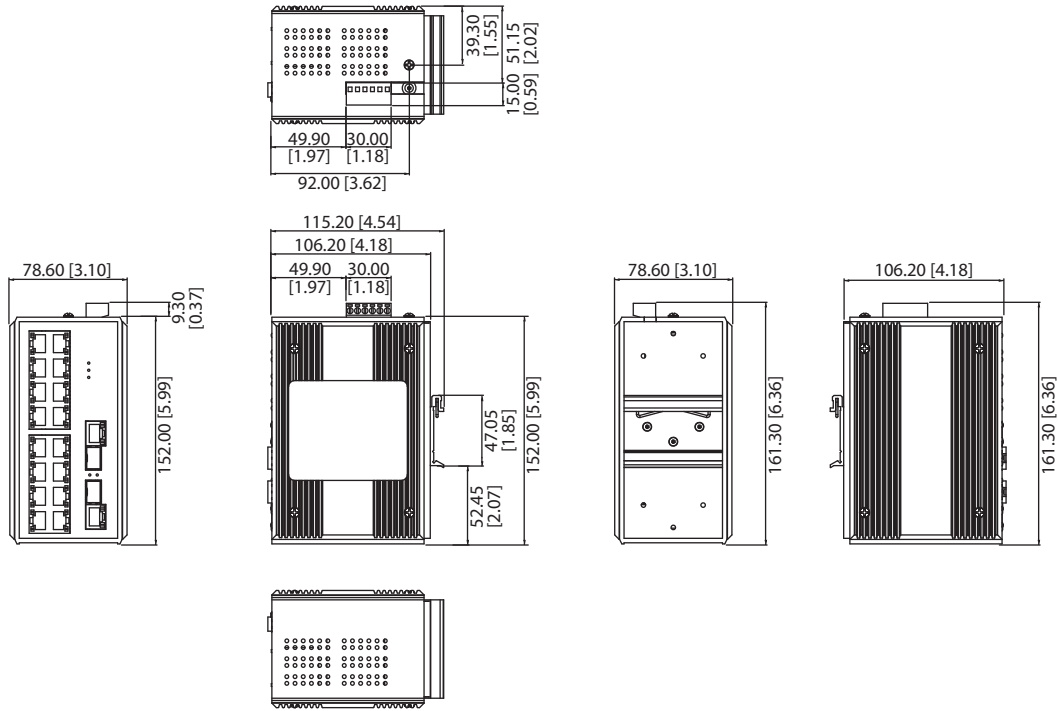

**Panel Cut-out Dimensions: 115.2 x 152 x 78.6 mm (4.54" x 5.99" x 3.1")**

## Ordering Information

- **EKI-7626C** 16+2G Combo Port Unmanaged Ethernet Switch
- **EKI-7626CI** 16+2G Combo Port Unmanaged Ethernet Switch w/ Wide Temp

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ethernet Modules](#) category:*

*Click to view products by [Advantech](#) manufacturer:*

Other Similar products are found below :

[1026937](#) [1026932](#) [M38510/00302BCA](#) [70001610](#) [70001634](#) [850-15633](#) [PD-AS-951/12-24](#) [GX-OC1601](#) [1402407](#) [I210T1](#) [SBL2EX](#)  
[SL170115](#) [GX-OD1612](#) [CPTS-4R4E-R](#) [TDKEZW3](#) [I350F2](#) [I350F2BLK](#) [I350T2V2](#) [V23993-USB1029A](#) [100-POE4](#) [105FX-ST](#) [105TX-SL](#)  
[SEG305-T](#) [70001992](#) [708TX](#) [854-19720](#) [I350T4V2BLK](#) [I210T1BLK](#) [PD-OUT/MBK/S](#) [SX-BR-4600WAN2-US](#) [W4S105C](#)  
[X710DA4FHBLK](#) [GX-ID1611](#) [EKI-2525I-BE](#) [96NIC-1G4P-PE-IN2](#) [0.70001777](#) [105FXE-SC-15-POE](#) [PD-OUT/MBK/G](#) [856-15410](#)  
[X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [855-10932](#) [850-15526](#) [808-38157](#) [SF-100GLB0W00-0DB](#) [BCM84858RB1KFEBG](#)  
[1031683](#) [2702903](#) [SF-100GLB3.5W-3DB](#)