

EKI-7706G-2F

EKI-7706G-2FI

4GE+2SFP Gigabit Managed Redundant Industrial Switch



Features

- 4 Gigabit Ethernet ports with auto negotiation, MDI/MDI-X function, Full/Half duplex + 2 SFP ports
- SFP socket for easy and flexible fiber expansion
- Redundancy: X-Ring Pro (ultra-high-speed recovery time, <20 ms), RSTP/STP (802.1w/1D)
- IXM function enables fast deployment
- Security: 802.1x (Port-based, MD5/TLS/TTLS/PEAP encryption), RADIUS
- Management: SNMP v1/v2c/v3, WEB, Telnet, standard MIB, private MIB
- Wide operating temperature range of -40 ~ 85°C (EKI-7706G-2FI)
- Dual 12~48 V_{DC} power input and 1 x relay output
- Supports Security Pack to fight against internal and external cyber threats
- Store and forward

Introduction

The EKI-7706G-2F and EKI-7706G-2FI support 4 Gigabit Ethernet ports and 2 SFP ports. They provide abundant port options for connecting to various device types and are embedded with Advantech's IXM function, which can benefit users with faster deployment while saving considerably on engineering time and costs. The EKI-7706G series also supports NMS to help IT managers with networking maintenance and failure prevention. The series is equipped with X-Ring Pro, which can achieve ultra-high-speed recovery times of <20 ms, thus ensuring network stability.

Specifications

Interface

- **I/O Port** 4 x 10/100/1000BASE-T/TX RJ-45
2 x SFP (mini-GBIC) port
- **Console port** RS-232 (RJ45)
- **Power Connector** 6-pin screw terminal block (including relay)

Physical

- **Enclosure** Metal Shell
- **Protection Class** IP 30
- **Installation** DIN-Rail
- **Dimensions (W x H x D)** 43 x 120 x 84 mm (1.69" x 4.72" x 3.31")
- **Switch Fabric Speed** 12Gbps
- **Jumbo Frame** 9,216Bytes

LED Display

- **System LED** PWR1, PWR2, SYS, Alarm and R.M.
- **Port LED** Link / Speed / Activity

Environment

- **Operating Temperature** -40 ~ 85 °C (-40 ~ 185 °F) EKI-7706G-2FI
-10 ~ 60 °C (14 ~ 140 °F) EKI-7706G-2F
- **Storage Temperature** -40 ~ 85 °C (-40 ~ 185 °F)
- **Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- **Humidity** 10 ~ 95% (non-condensing)

Power

- **Power Consumption** 5.28W @ 48V_{DC} (System)
- **Power Input** 12~48 V_{DC}, redundant dual power input
- **Fault Output** 1 Relay Output 1A @ 24V_{DC} Max
- **Reverse polarity protection** Support
- **Overload current protection** Support

Certification


- **EMI** CE, FCC Class A
- **Safety** UL 61010, EN LVD 62368-1
- **EMC** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Railway Trackside** EN 50121-4

L2 Features

- **L2 MAC Address** 8K
- **Packet Buffer** 4.1 Mbit
- **VLAN Group** 256 (VLAN ID 1~4094)
- **VLAN Arrange** Tag-based VLAN, Q-in-Q (VLAN Stacking), GVRP
- **Port Mirroring** Per port, multi-source port
- **IP Multicast** IGMP snooping v1/v2/v3, MLD Snooping, IGMP immediate leave
- **Storm Control** Broadcast, multicast, unknown unicast
- **Redundancy** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring Pro, with ultra high-speed recovery time less than 20ms
- **IEEE Standard** 802.3, 802.3u, 802.3ab, 802.3x, 802.3z, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1x, 802.3ad

Dimensions

Unit: mm [inch]

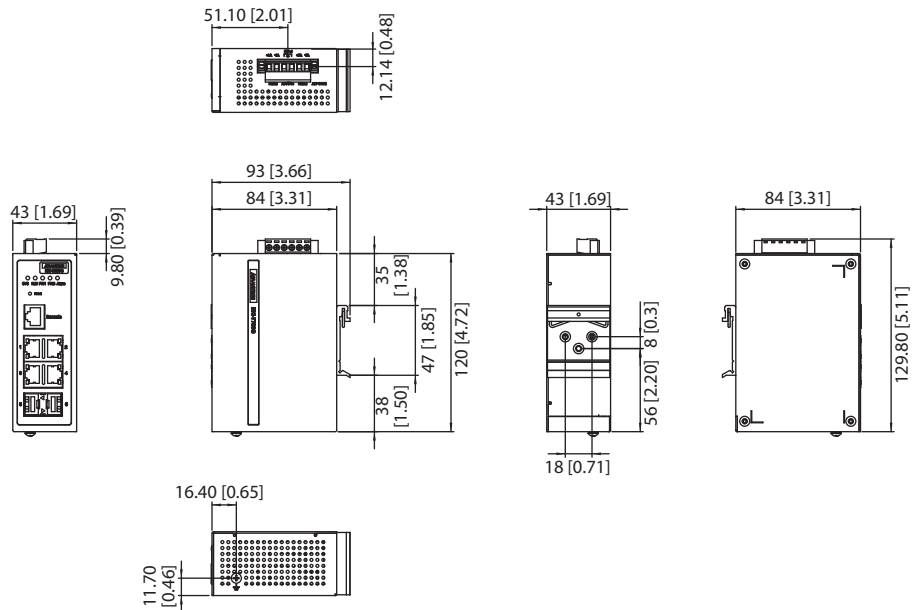

Panel Cut-out Dimensions: 84 (3.31) x 120 (4.72) x 43 (1.69)

QoS

- **Priority Queue** WRR (Weighted Round Robin), SP (Strict Scheduling Priority) hybrid priority
- **Class of Service** IEEE 802.1p based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Ingress rate limit, egress rate limit
- **Link Aggregation** IEEE 802.3ad dynamic port trunking, static port trunking

Security

- **Port Security** Static, Dynamic IP Source Guard, ARP Spoofing Prevention, Access Control List, DHCP Snooping
- **Authentication** 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), TACACS+

Management

- **DHCP** Client, server, option 66/67/82
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, standard MIB, private MIB
- **Security access** SSH2.0, SSL
- **Software upgrade** TFTP, HTTP, dual image
- **NTP** SNTP client

Ordering Information

- **EKI-7706G-2FI-AE** 4GE + 2SFP Port Managed Ethernet Switch w/ Wide Temp
- **EKI-7706G-2F-AE** 4GE + 2SFP Port Managed Ethernet Switch

Note: For SFP copper type, only 1000Mbps supported

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[TDKEZW3](#) [V23993-USB1029A](#) [100-POE4](#) [I210T1BLK](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#) [808-38157](#) [7506GX2](#) [TC](#)
[EXTENDER 2001 ETH-2S](#) [105FX-SC-MDR](#) [110FX2-SC](#) [BCM54291B0IQLEG](#) [7000-P3201-P050150](#) [750-1415](#) [750-494](#) [750-495](#) [750-612](#)
[750-613](#) [750-627](#) [750-643](#) [750-940](#) [753-440](#) [753-540](#) [753-650/003-000](#) [852-1322](#) [852-1328](#) [852-1812](#) [852-1813](#) [852-1816](#) [LANTICK PE-](#)
[0-16](#) [LANTICK PE-16-0](#) [RBMTXLITE-L4X2.X.X.X.X.](#) [USR-TCP232-T2](#) [2017008](#) [EKI-7708E-4F-AE](#) [EKI-7708E-4FP-AE](#) [EKI-7708G-](#)
[4FP-AE](#) [2352903-2](#) [753-620](#) [EGU-0702-SFP-T](#) [SW-125](#) [SW-525](#) [SW-725](#) [1005957](#) [1006191](#) [304TX-N](#) [WIZ107SR_TTL](#) [ES-320](#)
[TDKEZW5](#)