

EKI-7710E-2CP EKI-7710E-2CPI

8FE+2G Port Gigabit Managed Redundant Industrial PoE Switch



Features

- 8 x IEEE 802.3 af/at PoE fast Ethernet ports + 2 x Gigabit copper/SFP combo ports
- SFP socket for easy and flexible fiber expansion
- Redundancy: X-Ring Pro (ultra-high-speed recovery time, <20 ms), RSTP/STP (802.1w/1D)
- IXM function enables fast deployment
- Security: 802.1x (port-based, MD5/TLS/TTLS/PEAP encryption), RADIUS
- Management: SNMP v1/v2c/v3, WEB, Telnet, standard MIB, private MIB
- Wide operating temperature range (EKI-7710E-2CPI)
- Dual 24 ~ 48 V_{DC} power input and 1 x relay output

Introduction

The EKI-7710E-2CP/2CPI support 8 PoE ports and 2 Gigabit combo ports. They can provide up to 30 W per port for high-power-consumption powered devices. They also features Advantech's IXM function, which can benefit users with fast deployment and can save considerably on engineering time and cost. The series also support NMS to help IT managers with networking maintenance and failure prevention. Finally, they are equipped with X-Ring Pro, which can achieve ultra-high-speed recovery times of <20 ms, thus ensuring network stability.

Specifications

Interface

- **I/O Port** 8 x 10/100BASE-T/TX RJ-45
2 x RJ-45/SFP(mini-GBIC)Combo port
- **Console port** RS-232 (RJ45)
- **Power Connector** 6-pin screw Terminal Block (including relay)

Physical

- **Enclosure** Metal Shell
- **Protection Class** IP 30
- **Installation** DIN-Rail
- **Dimensions (W x H x D)** 74 x 152 x 105 mm (2.91" x 5.98" x 4.13")

LED Display

- **System LED** PWR1, PWR2, SYS, Alarm and R.M.
- **Port LED** Link / Speed / Activity / PoE

Environment

- **Operating Temperature** -40 ~ 75 °C (-40 ~ 167 °F) 7710E-2CPI
-10 ~ 60 °C (-40 ~ 140 °F) 7710E-2CP
- **Storage Temperature** -40 ~ 85 °C
- **Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- **Humidity** 10 ~ 95% (non-condensing)

Power

- **Power Consumption** 12.1W @ 48V_{DC} (System)
- **Power Input** 24 ~ 48 V_{DC}, redundant dual power input
- **Power Budget** 120W
- **Fault Output** 1 Relay Output

Certification


- **EMI** CE, FCC Class A
- **Safety** UL508
UL60950*, C1D2*
- **EMC** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
EN50121-4*
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Traffic control** NEMA TS2*
- *= Compliant
- **Patent** <http://www.advantech.com/legal/patent>

L2 Features

- **L2 MAC Address** 8K
- **Jumbo Frame** 9216 Bytes
- **VLAN Group** 256 (VLAN ID 1 ~ 4094)
- **VLAN Arrange** Port based VLAN, Q-in-Q (VLAN Stacking), GVRP
- **Port Mirroring** Per port, Multi-source port,
- **IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **Storm Control** Broadcast, Multicast, Unknown unicast
- **Redundancy** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP, X-Ring Pro, with ultra high-speed recovery time less than 20ms

Dimensions

Unit: mm [inch]

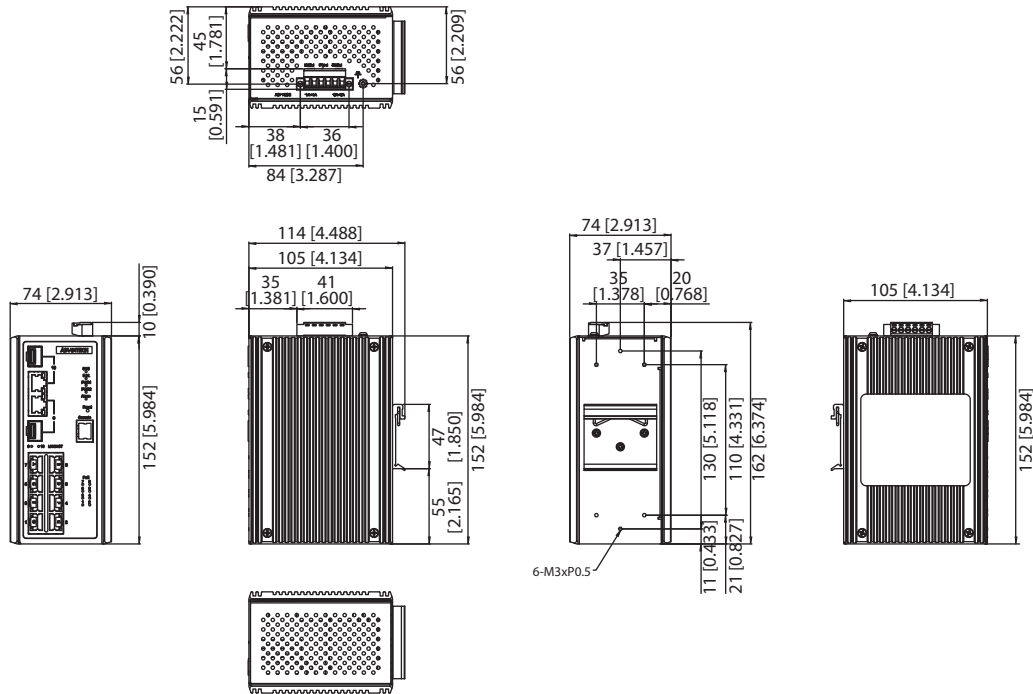

Panel Cut-out Dimensions: 105 (4.137) x 152 (5.984) x 74 (2.91)

QoS

- **Priority Queue** WRR (Weighted Round Robin), SP (Strict Scheduling)
- **Scheduling** Priority Hybrid Priority
- **Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Ingress Rate Limit, Egress Rate Limit
- **Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

Security

- **Port Security** Static, Dynamic IP Source Guard, ARP Spoofing Prevention, Access Control List, DHCP Snooping,
- **Authentication** 802.1x (Port-Based, MD5/TLS/TTLS/PEAP Encryption), TACACS+

Management

- **DHCP** Client, Server, Option66/67/82
- **Access** SNMP v1/v2c/v3, WEB, Telnet, RMON, Standard MIB, Private MIB
- **Security access** SSH2.0, SSL
- **Software upgrade** TFTP, HTTP, Dual Image
- **NTP** SNTP client

Ordering Information

- **EKI-7710E-2CPI-AE** 8FE + 2G Combo Port Managed PoE Ethernet Switch w/Wide Temp
- **EKI-7710E-2CP-AE** 8FE + 2G Combo Port Managed PoE Ethernet Switch

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ethernet Modules](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[1026937](#) [1026932](#) [M38510/00302BCA](#) [70001610](#) [70001634](#) [850-15633](#) [PD-AS-951/12-24](#) [GX-OC1601](#) [1402407](#) [I210T1](#) [I350T4V2](#)
[SBL2EX](#) [SL170115](#) [GX-OD1612](#) [CPTS-4R4E-R](#) [TDKEZW3](#) [I350F2](#) [I350F2BLK](#) [I350T2V2](#) [V23993-USB1029A](#) [100-POE4](#) [105FX-ST](#)
[105TX-SL](#) [SEG305-T](#) [70001992](#) [70001993](#) [708TX](#) [854-19720](#) [I350T4V2BLK](#) [I350T2V2BLK](#) [I210T1BLK](#) [PD-OUT/MBK/S](#) [SX-BR-](#)
[4600WAN2-US](#) [W4S105C](#) [X710DA4FHBLK](#) [I350T2V2BLK](#) [936714](#) [GX-ID1611](#) [3G8F7-DRM21-E](#) [EKI-2525I-BE](#)
[BCM53426A0KFSBG](#) [PCM-24R2GL-AE](#) [96NIC-1G4P-PE-IN2](#) [0.70001777](#) [BCM53402A0KFSBG](#) [105FXE-SC-15-POE](#) [PD-OUT/MBK/G](#)
[856-15410](#) [X520QDA1](#) [BCM84794A1KFSBG](#) [X520DA2OCP](#)