

HPC-7282

2U Rackmount Chassis for Micro/ATX Server Board with 8 Hot-swap Drive Bays, 7 Low Profile Expansion Slots



Features

- 2U rackmount chassis supports MicroATX/ATX motherboard
- Eight hot swap SAS/SATA drive bays
- Swappable fan module design facilitates maintenance
- Supports 7 x low-profile/half-length I/O expansion slots

CE FCC

Specifications

Form Factor Support		MicroATX/ATX	
Expansion Slots		Supports 7 x low-profile/half-length I/O expansion slots	
Drive Bay	Slim ODD Bay	1 (ODD should be purchased separately)	
	5.25" (front-accessible)	-	
	3.5" (hot-swappable)	8 SASII / SATAIII (Lockable)	
	2.5" / 3.5" (internal)	2	
Cooling	2.5" (hot-swappable)	Optional	
	Chassis Fan	3 x 80 mm fan module with swappable bracket	
	Air Filter	-	
System Monitoring		Chassis intrusion switch	
Front I/O Interface	USB 2.0	2	
	COM Port	1	
Miscellaneous	LED Indicators	Power, HDD activity, LAN, System Information	
	Rear Panel	-	
Environment		Operating	Non-Operating
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	-40 ~ 70 °C (-40 ~ 158 °F)
	Humidity	10 ~ 85% @ 40 °C non-condensing	10 ~ 95% @ 40 °C, non-condensing
	Vibration (5-500 Hz)	0.25Grms	0.5G
Physical Characteristics	Dimensions (W x H x D)	437 x 88.9 x 533.4 mm (17.2" x 3.5" x 21")	

Front View




Rear View



Dimensions

Unit: mm [inch]

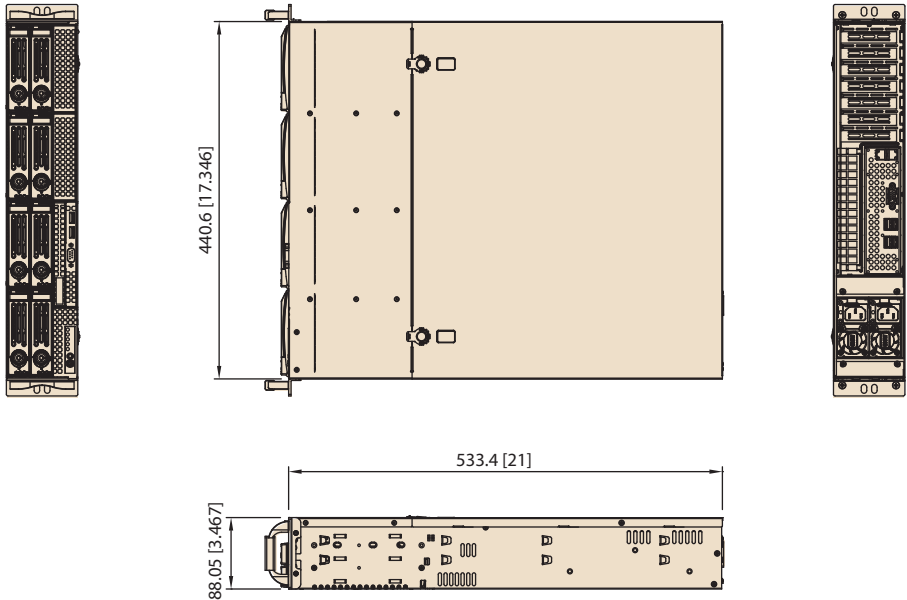

Ordering Information

Part Number	Description
HPC-7282-00A1E	HPC-7282 2U 8 bays server chassis (w/o PSU)

Packing List

Description	Quantity
Hot-swap 3.5" HDD Trays with SATA cable (Pre-installed)	x 8
System Accessory	x 1

Power Supply Options

Part Number	80 Plus Grade	Wattage	Type	Input
PS8-500U2-XE	Bronze	500W	Single	AC 100 ~ 240 V (full range)
XARR-CPS-6811-2A12	Gold	680W	Single	AC 100 ~ 240 V (full range)
RPS8-500U2-XE	Bronze	500W	(1+1) Redundant	AC 100 ~ 240 V (full range)
RPS8-700U2-XE	Gold	700W	(1+1) Redundant	AC 100 ~ 240 V (full range)

Optional Accessories

Part Number	Description
96CB-SAS-SATA-4P1	Mini SAS to 4-port SATA Cable*
96CB-SATAPOWER-6P2	SATA power adapter 6-pin to big 4-pin (G) for slim ODD
9680016633	2.5" HDD Bracket for Swappable HDD Tray
9680016697	19" - 26.6" Rail Kit for HPC-7282
9680016698	26.5" - 33" Rail Kit for HPC-7282

- * Note:
- When using an add-on RAID card with mini-SAS connector(s), purchasing the 96CB-SAS-SATA-4P1 cable is a essential:- single port RAID card needs 1 piece, dual port needs 2 pieces.
 - HPC-7282 does not support AIMB series motherboards.
 - When installing the power supply please use the power supply bracket inside the accessory box.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Modules Accessories](#) category:

Click to view products by [Advantech](#) manufacturer:

Other Similar products are found below :

[7010-0001](#) [AX98219](#) [A1UL8RISER](#) [F1UJPMICRISER](#) [FHW1U16RISER](#) [20-101-0440](#) [2828736-1](#) [MBCDROM](#) [AX61221TM](#) [VM-105](#)
[EA CARREDIPTFT02](#) [RK-210E-B](#) [E226171106](#) [88606200030E](#) [SI-HDMI-EDID-EM](#) [MIC-75M13-00A1E](#) [FPM-1000T-SMKE](#) [AMK-](#)
[R004E](#) [96FMCF-ST2ADAPTER1](#) [AHWKPTP12GBGB](#) [AXXSTCPUCAR](#) [FPK-07-R10](#) [Mini Din 6P to 6P HARNESS](#) [FPF1320 POWER](#)
[MULTIPLEXER CARRIER](#) [881261510A0E](#) [AXXP3SWX08080](#) [conga-B7XD/CSP-Cu-B](#) [881281021A0E](#) [HFT for mounting KIT](#)
[FN928X_FN929X](#) [BB-MH112-1A](#) [15100600](#) [9-5000-1116](#) [BKCMCR1ABB](#) [70763](#) [98R3612003E](#) [881261910A0E](#) [106897](#) [48222R](#)
[BREAK OUT BOARD 20](#) [4D ARDUINO ADAPTOR SHIELD II](#) [20926110901](#) [PYCASE GREEN](#) [PYCASE BLUE](#) [FP15072_ZORYA-SC-](#)
[HEKLA](#) [20952000004](#) [20953000007](#) [DP-DVI-R10](#) [575-BBIS](#) [RACK-220GW/A130B](#) [492-BBKM](#)